

# RC RODCRAFT®



**TOOLS AND WORKSHOP  
EQUIPMENT 2017-2018**



**QUALITY FOR PROFESSIONALS**

# RODCRAFT

# QUALITY FOR PROFESSIONALS

## One of the world's leading brands

Since 1974, the Rodcraft brand stands for high-quality products and services. Founded in Germany, Rodcraft has grown steadily to become one of the world's leading brands of pneumatic tools and workshop equipment dedicated to the vehicle service and industrial maintenance applications.

## Research and development

Our organisation is constantly investing in research and development, and the Rodcraft product range features many patented designs such as our composite sander and latest impact wrench series.

## Market coverage

With a strong European based sales channel, local sales offices, dedicated distributors and national importers are covering over 80 countries worldwide on a daily basis. We are close to our clients and able to provide fast service and support.

## Testing and quality inspections

To ensure and guarantee long life performance, many strict testing and quality inspections are conducted through the tool and equipment design, production and assembly stages. All products are thoroughly tested at the Technocenter to pass EC certification according to ISO standards and many of the customer centres marketing the Rodcraft product lines are ISO 9001 and ISO 14001 certified.




## Discover the complete Rodcraft range on [www.rodcraft.com](http://www.rodcraft.com)

- online air tools catalogue
- online workshop equipment catalogue
- Rodcraft accessories
- technical documentation
- service centre contacts
- Rodcraft sales and distributor contacts



**Check out today our mobile eCatalog on [m.rodcraft.com](http://m.rodcraft.com)**

**A broad range of pneumatic tools and workshop equipment dedicated to the vehicle service and industrial maintenance applications.**

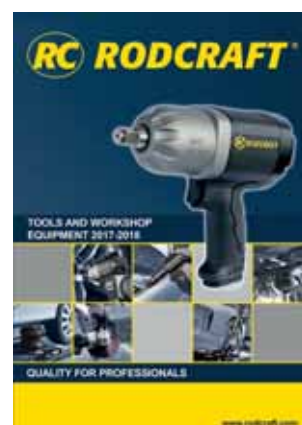

# GLOSSARY

 Anvil size



In order to help you select the correct tool we have classified all RODCRAFT tools according to duty levels:  
1 = normal duty | 2 = heavy duty | 3 = very heavy duty | 4 = super heavy duty



Silencing exhaust hose systems, available as accessory



Number of settings for regulating forward power



Working torque



Reverse torque



Air consumption under load per minute



Air consumption at free speed per minute



Possible to be used with balancers because of e.g. suspension bail

AG = outer thread

IG = inner thread

All technical data is based on a tool incoming pressure of max. 6.3 bar (90 psi)  
Norms applied : noise according to ISO15744, vibration 3-axis according to ISO28927-3,

Impact mechanism:

SH = single hammer  
CH = closed hammer

PC = pin clutch

DP = duopact  
TL = torque limited

For more information see page 6



Capacity



Weight



# References

## Important requirements for the use of air tools!

In order to maintain the power of a pneumatic motor, to avoid damage and to prolong the tool's life time the compressed air has to meet certain quality standards. Its recommended to install a maintenance unit at each compressed air outlet or work place.

The following conditions for operation are of great importance and should be observed closely. For each type of work place the correctly suited maintenance unit will produce optimum conditions for the used air tools.

### Air Pressure

The standard pressure of the supplied air should be 6.3 bar (90 psi) at the air entrance of the air tool (also when air is flowing). Air inlet pressures that are too high will lead to excessive wear

and failure of the tool after a while. Tools operating with too low air pressure are usually lacking in their full performance.

### Air Quantity

Depending on the type of air tool the air consumption during full performance may vary. Please compare the max. air consumption values for tools

indicated in our manuals and catalogues, the recommended hose sizes (inner diameter) with the max. flow rates of the maintenance units and the effective capacity of your compressor.

### Condense / Dirt

The water separators and filters which are integrated in our maintenance units avoid corrosion in air motors and supply clean air. A high content of water in the compressed air will lead to rust and

smaller passages in steel pipes and air lines which means air pressure losses and a lack of performance of the air tools. If no filters are used, rust and particles will damage or block the motor.

### Lubrication

Periodical lubrication of air motors is absolutely required (daily) to maintain full performance of the motor, to prolong the life time of the motor and to prevent corrosion. If a motor is not running

with continuous air lubrication (lubricator), it should be lubricated manually every day (approx. 2 cm<sup>3</sup> air oil (model 1000L)). Please see also the drawing for installation in the manual.

### Operating Manuals

Please follow the instructions for maintenance and safe use in the operating manual (drawing for installation).


When a tool is not used according to the requirements for correct operation and air preparation we will not be able to grant any warranty in case of failure.

### Examples of Installation:

Maintenance units without lubricator but with coalescing filter for use with paint guns, blow guns and for oil-free operations.



Maintenance units with lubricator (slim or broad design) for all tools that require permanent lubrication.

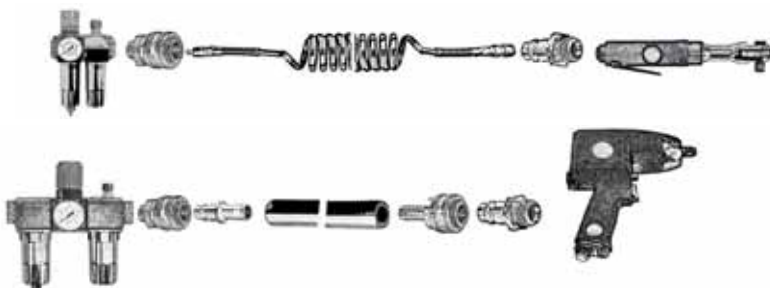

### Duty

In order to help you select the correct tool we classified all RODCRAFT tools according to duty levels:

- ① normal duty
- ② heavy duty
- ③ very heavy duty
- ④ ultra heavy duty

## Impact Mechanism

### Single Hammer "SH"

Long proven, inexpensive construction with one (two) hammer(s) and grease lubrication.

**For all standard assembly work in:**

- Hardware and agro-mechanics
- Light industrial sector
- Automotive repair services
- Tyre services



### Pin Clutch "PC"

Low vibration impact system with rapid torque increase and economic construction consisting of hardened, turned parts running in a closed impact cage. Lubricated with impact system oil model 1000S (oil bath lubrication - except model 2530 mechanism lubricated with grease)

**For all quick assembly work in :**

- Tyre services
- Automotive repair services
- Hardware
- Light industrial sector



### DUOPACT "DP"

Reliable system for continuous torque increase with two extremely robust, forged ring-hammers. Consisting of surprisingly few parts and having an extremely short design. Lubricated with grease - lubrication from outside partly possible with our Mini Grease Pump model 8150 without opening the housing.

**For all extremely intense applications, like :**

- Industry
- Tyre services
- Automotive repair services



### Closed Hammer System "CH"

This almost maintenance-free running mechanism is dedicated to break loose nuts and bolts without large effort due to its massive closed inertia. The construction is showing a very good weight / power ratio and has typically a short design. The closed construction means that once lubricated, the grease filling stays in place in the hammer for a long period of time.

**Typical for:**

- Industry
- Truck and bus tyre services and assemblies



### Torque Limited "TL"

Please also try our special mechanisms "TL-Torque Limited" for fast and safe pre-tightening for precise final torquing by torque wrench, e.g. tyre services

- Can be found in model: 2263TL

# CONTENT

<b>01  Tightening</b> _____	<b>8</b>	<b>10  Car glass removal</b> _____	<b>80</b>
Impact wrenches		Cutters	
Ratchets		Accessories	
Gloves			
Accessories			
<b>02  Assembly</b> _____	<b>24</b>	<b>11  Painting</b> _____	<b>84</b>
Screwdrivers		Painting guns	
		Accessories	
<b>03  Drilling</b> _____	<b>28</b>	<b>12  Miscellaneous</b> _____	<b>88</b>
Drills		Tyre fillers	
Accessories		Blow guns	
		Underbody coating guns	
		Grease guns	
		Cartridge guns	
<b>04  Chipping</b> _____	<b>34</b>	<b>13  Accessories</b> _____	<b>97</b>
Hammers		Magnetic dishes	
Engravers		Maintenance units	
Scrapers		Air line connectors	
Accessories		Hoses	
		Balancers	
<b>05  Descaling</b> _____	<b>42</b>	<b>14  Trolley jacks</b> _____	<b>104</b>
Needle scalers			
Accessories		<b>15  Motor</b> _____	<b>118</b>
		<b>16  Gear</b> _____	<b>122</b>
<b>06  Speciality tools</b> _____	<b>46</b>	<b>17  Car body</b> _____	<b>128</b>
Shears		<b>18  Workshop presses</b> _____	<b>134</b>
Sheet metal tools		<b>19  Wheel Dolly</b> _____	<b>140</b>
Spot welding drills		<b>20  Various</b> _____	<b>144</b>
Saws			
Accessories			
<b>07  Riveting</b> _____	<b>52</b>		
Riveters			
<b>08  Grinding &amp; sanding</b> _____	<b>56</b>		
Die & angle die grinders			
Angle grinders			
Erasers			
Orbital sanders			
Belt Sanders			
Accessories			
Dust extraction stations			
<b>09  Polishing</b> _____	<b>76</b>		
Polishers			
Accessories			

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20



RC2277

## 01| Tightening

### | Impact wrenches

- 1/4" Impact wrenches
- 3/8" Impact wrenches
- 1/2" Impact wrenches
- 3/4" Impact wrenches
- 1" Impact wrenches
- 1 1/2" Impact wrenches

### | Ratchets

- 1/4" Ratchets
- 3/8" Ratchets
- 1/2" Ratchets

### | Accessories

- Safety gloves
- Impact sockets

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20





**Model** Part#  
**RC2077** 8951000117  
**RC2077K** 8951000145

**Model** Part#  
**RC2003** 8951000195  
**RC2101** 8951000196

Model	RC2077	
Anvil		1/4"
Working Torque		40 Nm
Max Torque		60 Nm
Speed		14000 min <sup>-1</sup>
Weight		0.69 kg
Hose		8 mm
Dimension axbxc		150x140x40 mm
Air cons.		200 l/min
Air cons.		390 l/min
Air inlet		1/4" IG
Impact system		SINGLE HAMMER
Sound LpA		87.6 dB(A)
Vibration		5.92 m/s <sup>2</sup>

**60 Nm max.**

Model	RC2003	RC2101
Anvil		1/4" 3/8"
Working Torque		60 Nm
Max Torque		110 Nm
Speed		15000 min <sup>-1</sup>
Weight		0.53 kg
Hose		8 mm
Dimension axbxc		140x.x40 mm
Air cons.		42 l/min
Air cons.		174 l/min
Air inlet		1/4" IG
Impact system		DOUBLE ROCKING DOG
Sound LpA		92 dB(A)
Vibration		4 m/s <sup>2</sup>

**110 Nm max.**



- 1/4" square drive impact wrench
- 60 Nm in reverse
- Ergonomic handle with injected TPR grip
- One hand forward – reverse switch
- 0.69 Kg – 150 mm length



- 140 mm length, provides easier access to hard to reach places
- 1.16 lbs. / 0.53 Kg
- 80 ft.lbs. / 110 Nm in reverse


## 16 pc 1/4" socket set

**Model** Part#  
**RC2077K** 8951000145

- RC2077
- 1/4" 6 Point impact sockets: 8 - 9 - 10 - 11 - 12 mm
- 1/4" 50 mm long Torx bits: T15 - T20 - T25 - T30 - T40
- 1/4" 50 mm hexagonal bits: 5 - 6 - 8 - 10 mm
- 1/4" square to 3/8" hexagonal adaptor
- 1/4" quick change bit holder



# IMPACT WRENCH 1/2"



Model	Part#
RC2177	895100043
RC2267	895100044

Model	Part#
RC2205	895100085

Model	Part#
RC2202	8951000123

Model	RC2177	RC2267
Anvil	3/8"	1/2"
Working Torque	420 Nm	480 Nm
Max Torque	580 Nm	660 Nm
Speed	8200 min <sup>-1</sup>	10200 min <sup>-1</sup>
Weight	1.25 kg	
Hose	8 mm	
Dimension axbxc	164x175x60 mm	
Air cons.	160 l/min average	180 l/min
Air cons.	470 l/min cont.	510 l/min
Air inlet	1/4" IG	
Impact system	DUOPACT	
Sound LpA	90 dB(A)	93 dB(A)
Vibration	7.9 m/s <sup>2</sup>	6.9 m/s <sup>2</sup>


580 & 660 Nm max. Composite - Only 1,25 kg

Model	RC2205
Anvil	1/2"
Working Torque	406 Nm
Max Torque	580 Nm
Speed	7800 min <sup>-1</sup>
Weight	2.4 kg
Hose	10 mm
Dimension axbxc	150x140x40 mm
Air cons.	130 l/min average
Air cons.	350 l/min cont.
Air inlet	1/4" IG
Impact system	PIN CLUTCH
Sound LpA	87,4 dB(A)
Vibration	6,71 m/s <sup>2</sup>

580 Nm max.

Model	RC2202
Anvil	1/2"
Working Torque	420 Nm
Max Torque	610 Nm
Speed	9000 min <sup>-1</sup>
Weight	1.3 kg
Hose	10 mm
Dimension axbxc	112x175x60 mm
Air cons.	225 l/min average
Air cons.	540 l/min cont.
Air inlet	1/4" IG
Impact system	JUMBO HAMMER
Sound LpA	95 dB(A)
Vibration	12.1 m/s <sup>2</sup>

610 Nm max. Only 1,3 kg



**RODCRAFT Premium**

- Heavy duty impact wrench
- DUOPACT impact mechanism
- Composite lightweight motor housing
- Well balanced, insulating rubber areas on handle
- Robust F/R shift with 3 positions regulator in forward
- Full power in reverse
- A silencing exhaust hose can be attached



- 1/2" square drive impact wrench
- One hand operation with push-through forward-reverse shift
- 4 positions regulator in forward
- Full power in reverse - 580 Nm max,
- A silencing exhaust hose can be attached
- Rubber protector on front



- 1/2" Ultra compact impact wrench
- 610 Nm maximum torque in reverse
- Steel front cover & Aluminum body
- Length = 112 mm as can size
- Jumbo hammer mechanism
- 3 settings in both directions

## Accessories for 3/8" impacts

Model	Part#
RS3113	8951012354

- 3/8" square drive
- 13 pieces (7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19)

## Accessories for 1/2" impacts

Model	Part#
RS4114	8951012356

- 1/2" square drive
- 14 pieces (10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27)

## Anti scratch protected

Model	Part#
RS413WP	8951012362



- 85 mm long 1/2" socket
- SW17 / 19 / 21 mm
- Extra thin-walled for alloy rims
- Impact proof chrome-molybdenum quality
- Individual sockets also available

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20

# IMPACT WRENCH 1/2"



**Model** Part#  
**RC2235** 8951000286

**Model** Part#  
**RC2257** 8951000037

**Model** Part#  
**RC2277** 8951000025

Model	RC2235	
Anvil		1/2"
Working Torque		220 Nm
Max Torque		300 Nm
Speed		7400 min <sup>-1</sup>
Weight		1.85 kg
Hose		8 mm
Dimension axbxc		341x80x58 mm
Air cons.		81 l/min
Air cons.		408 l/min
Air inlet		1/4" IG
Impact system		JUMBO HAMMER
Sound LpA		97 dB(A)
Vibration		43.5m/s <sup>2</sup>


**300 Nm max.**

Model	RC2257	
Anvil		1/2"
Working Torque		680 Nm
Max Torque		950 Nm
Speed		8950 min <sup>-1</sup>
Weight		2.5 kg
Hose		10 mm
Dimension axbxc		213x194x70 mm
Air cons.		200 l/min
Air cons.		610 l/min
Air inlet		1/4" IG
Impact system		DUOPACT
Sound LpA		94 dB(A)
Vibration		6.8 m/s <sup>2</sup>

**950 Nm max.**

Model	RC2277	
Anvil		1/2"
Working Torque		900 Nm
Max Torque		1250 Nm
Speed		8200 min <sup>-1</sup>
Weight		2 kg
Hose		10 mm
Dimension axbxc		194x188x70 mm
Air cons.		245 l/min
Air cons.		760 l/min
Air inlet		1/4" IG
Impact system		DUOPACT
Sound LpA		93 dB(A)
Vibration		9.7 m/s <sup>2</sup>

**1250 Nm max.**



- Handle with ergonomic grip
- Full teasing trigger
- Torque selection
- Easy forward reverse selection

- 1/2" square drive impact wrench
- One hand operation
- 3+3 position regulator and F/R shift
- 950 Nm max, power in reverse
- A silencing exhaust hose can be attached
- Long handle

- 1/2" square drive impact wrench
- 1250 Nm maximum real torque in reverse
- The Beast Aluminum alloy clutch housing
- Twin hammer mechanism
- Friction ring socket retainer
- Full teasing trigger
- Curved handle with Thermo-Plastic Rubber injected in housing for a durable and comfortable grip, Resistant to most chemicals used in workshops
- NEW power setting system : 1 hand-operation, 1 position in reverse & 3 positions in forward
- 360° swivel air inlet



**Model** Part#  
**RC2257K** 8951000089

- 1/2" impact set including:
- 1 RC2257 1/2" square drive impact wrench
- 1/2" square drive short impact socket set in case with hex sizes: 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 21 / 22 / 26 / 27 mm
- Oil bottle
- Hex key for maintenance



**Anti scratch protected**

**Model** Part#  
**RS414WP** 8951012363

- 85 mm long 1/2" socket
- SW17 / 19 / 21 / 22 mm
- Extra thin-walled for alloy rims
- Impact proof chrome-molybdenum quality
- Individual sockets also available



**Model** Part#  
**RC2277K** 8951000182

- RC2277 Long Protected sockets: 17 - 19 & 21 mm





- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

**DUOPACT  
impact system**

**1250 NM MAX TORQUE**




**Grease nipple  
easy to access**

**High quality, low weight  
composite housing**

**Thermo-plastic-rubber  
coated handle for full grip**

**RC2277**





**Model** Part#  
**RC2315** 8951077130

**Model** Part#  
**RC2377** 8951000045 short anvil  
**RC2387** 8951000074 long anvil

Model	RC2315	
Anvil		3/4"
Working Torque		1100 Nm
Max Torque		1500 Nm
Speed		5600 min <sup>-1</sup>
Weight		4.7 kg
Hose		13 mm
Dimension axbxc		242x230x78 mm
Air cons.		340 l/min
Air cons.		990 l/min
Air inlet		3/8" IG
Impact system		DUOPACT
Sound LpA		91.1 dB(A)
Vibration		9.97 m/s <sup>2</sup>

**1500 Nm max.**

Model	RC2377 / RC2387	
Anvil		3/4"
Working Torque		1300 Nm
Max Torque		1950 Nm
Speed		5760 min <sup>-1</sup>
Weight		3.5 / 4.1 kg
Hose		13 mm
Dimension axbxc	RC2377 RC2387	225x84x199 mm 300x84x199 mm
Air cons.		255 l/min
Air cons.		972 l/min
Air inlet		3/8" IG
Impact system		DUOPACT
Sound LpA		96.8 dB(A)
Vibration		14.5 m/s <sup>2</sup>

**1950 Nm max.**



- 3/4" square drive impact wrench
- DUOPACT mechanism
- 3 position regulator in forward
- Full power in reverse
- Insulating rubber sleeve on handle



**RODCRAFT**  
Premium



- 3/4" square drive impact wrench
- Injected TPR grip
- 3 positions in forward, full power in reverse
- Great teasing for optimal control
- 1950 Nm max torque
- Composite housing, only 3,5 kg even at this high power level
- Forged DUOPACT mechanism
- Impact mechanism housing made of steel and aluminium
- Swivel air inlet
- Mini grease plug on the front housing

**Accessories for 3/4" impacts**

**Model** Part#  
**RS618** 8951012358




- 3/4" square drive
- 8 pieces
- (26, 27, 29, 30, 32, 35, 36, 38)

**RC2387**  
**Anvil extension 75mm**





# IMPACT WRENCH 1"



**Model** Part#  
**RC2405** 8951000075

**Model** Part#  
**RC2425** 8951077190 short anvil  
**RC2426** 8951077032 long anvil

**Model** Part#  
**RC2437-Xi** 8951000068 short anvil  
**RC2447-Xi** 8951000069 long anvil

Model	RC2405
Anvil	1"
Working Torque	1300 Nm
Max Torque	1950 Nm
Speed	5760 min <sup>-1</sup>
Weight	3.6 kg
Hose	13 mm
Dimension axbxc	221x84x199 mm
Air cons.	255 l/min
Air cons.	972 l/min
Air inlet	3/8" IG
Impact system	DUOPACT
Sound LpA	96.8 dB(A)
Vibration	14.5 m/s <sup>2</sup>

1950 Nm max.

Model	RC2425 / RC2426
Anvil	1"
Working Torque	1715 Nm
Max Torque	2450 Nm
Speed	3200 min <sup>-1</sup>
Weight	9.4 kg / 10.6 kg
Hose	13 mm
Dimension axbxc	RC2425 312x270x119 mm RC2426 460x270x119 mm
Air cons.	370 l/min
Air cons.	1020 l/min
Air inlet	1/2" IG
Impact system	SINGLE HAMMER
Sound LpA	97.9 dB(A)
Vibration	14.93 m/s <sup>2</sup>

2450 Nm max.

Model	RC2437Xi / RC2447Xi
Anvil	1"
Working Torque	1900 Nm
Max Torque	2700 Nm
Speed	6000 min <sup>-1</sup>
Weight	7.2 kg / 8.3 kg
Hose	13 mm
Dimension axbxc	RC2437Xi 275x158x245 mm RC2447Xi 490x165x190 mm
Air cons.	360 l/min
Air cons.	1100 l/min
Air inlet	1/2" IG
Impact system	DUOPACT
Sound LpA	100.8 dB(A)
Vibration	10.7 m/s <sup>2</sup>

2700 Nm max.



- 1" square drive impact wrench
- Injected TPR grip
- 3 positions in forward, full power in reverse
- Great teasing for optimal control
- 1950 Nm max torque
- Composite housing, only 3,38 kg even at this high power level
- Forged DUOPACT mechanism
- Impact mechanism housing made of steel and aluminum
- Swivel air inlet
- Mini grease plug on the front housing



- 1" square drive impact wrench
- 3+3 position regulator incorporating F/R shift
- 2450 Nm max, power in reverse
- A silencing exhaust hose can be attached
- Rubber protector on front



- 1" square drive impact wrench
- Injected TPR grip
- 3 steps forward and 2 steps in reverse
- Ergonomic trigger with great teasing for optimal control
- 2700 Nm max torque
- Composite housing, only 7,2 kg even at this high power level
- Fast and high torque with forged DUOPACT mechanism

**Model** Part#  
**RDP10** 8951011021

- Digital tyre gauge
- perfect for your coat pocket
- LCD display
- effective range up to 10 bar/150 psi
- Display in bar or psi




**RC2426**  
 with long anvil  
 (152 mm)



**RC2447Xi**  
 with long anvil  
 (152 mm)



# IMPACT WRENCH 1"

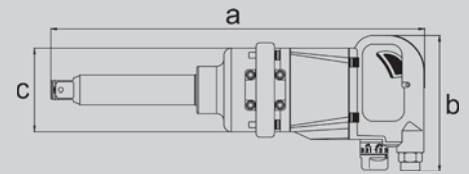

**Model** Part#  
**RC2466** 8951000047 short anvil  
**RC2476** 8951000048 long anvil

**Model** Part#  
**RC2457Xi** 8951000135 short anvil  
**RC2477Xi** 8951000046 long anvil

**Model** Part#  
**RC2444** 8951077210

Model	RC2466 / RC2476	
Anvil		1"
Working Torque		2000 Nm
Max Torque		2900 Nm
Speed		5150 min <sup>-1</sup>
Weight		10.1 kg / 11.6 kg
Hose		13 mm
Dimension axbxc	RC2466 RC2476	370x186x130 mm 520x186x130 mm
Air cons.		370 l/min
Air cons.		1150 l/min
Air inlet		1/2" IG
Impact system		CLOSED HAMMER
Sound LpA		100 dB(A)
Vibration		6.5 m/s <sup>2</sup>

2900 Nm max.

Model	RC2457Xi / RC2477Xi	
Anvil		1"
Working Torque		2000 Nm
Max Torque		2900 Nm
Speed		5900 min <sup>-1</sup>
Weight		7.2 kg / 8.1 kg
Hose		13 mm
Dimension axbxc	RC2457Xi RC2477Xi	337x165x190 mm 490x165x89 mm
Air cons.		300 l/min
Air cons.		920 l/min
Air inlet		1/2" IG
Impact system		DUOPACT
Sound LpA		106 dB(A)
Vibration		9.8 m/s <sup>2</sup>

2900 Nm max.

Model	RC2444	
Anvil		1"
Working Torque		2450 Nm
Max Torque		3500 Nm
Speed		2700 min <sup>-1</sup>
Weight		14.6 kg
Hose		13 mm
Dimension axbxc		325x300x121 mm
Air cons.		400 l/min
Air cons.		1120 l/min
Air inlet		3/8" IG
Impact system		CLOSED HAMMER
Sound LpA		104 dB(A)
Vibration		9.17 m/s <sup>2</sup>

3500 Nm max.



- 1" heavy duty impact wrench
- Extremely durable CLOSED HAMMER SYSTEM
- 3+3 position regulator incorporating F/R shift
- 2900 Nm max, power in reverse

**RC2476**  
with long anvil  
(152 mm)



- 1" super power impact wrench
- Lightweight motor housing
- Long anvil
- DUOPACT mechanism
- Very slim front - diameter 89 mm
- 3+3 position regulator incorporating F/R shift
- 2900 Nm max, power in reverse
- Ergonomic and insulating rubber areas on handles
- Rubber cover on the motor housing

**RC2477Xi**  
with long anvil  
(152 mm)



- 1" super power impact wrench
- Extremely durable CLOSED HAMMER SYSTEM
- 4+4 position regulator and F/R shift
- 3500 Nm max, power in reverse


## Accessories for 1" impacts

**Model** Part#  
**RS818** 8951012360



- 1" square drive
- 8 pieces  
(26, 27, 29, 30, 32, 35, 36, 38)

# IMPACT WRENCH 1 1/2"

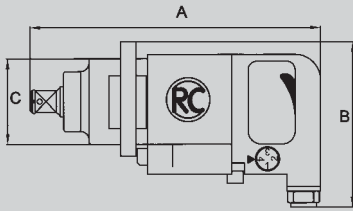

**Model**    **Part#**  
**RC2530**   **8951077260**

Model		RC2530
Anvil		1 1/2"
Working Torque		4200 Nm
Max Torque		5500 Nm
Speed		3600 min <sup>-1</sup>
Weight		17.7 kg
Hose		19 mm
Dimension axbxc		520x190x123 mm
Air cons.		600 l/min
Air cons.		1800 l/min
Air inlet		1/2" IG
Impact system		PIN CLUTCH
Sound LpA		97.1 dB(A)
Vibration		14.62 m/s <sup>2</sup>

**5500 Nm max.**




- 1 1/2" extreme power impact wrench with 4+4 position regulator and F/R shift
- 5500 Nm max. power in reverse

## Impact Wrench Tune up Kit

Model	Part#
RC2277	8950280018
RC2177	8950280024
RC2177	8950280024
RC2267	8950280024
RC2466	8950280028
RC2235	8950280081
RC2257 DP	8950280034
RC2477XI	8950280038
RC2457XI	8950280038
RC2377	8950280043
RC2387	8950280043
RC2405	8950280043
RC2205	8950280050
RC2437XI	8950280055
RC2447XI	8950280055
RC2077	8950280058
RC2277	8950280059
RC2202	8940171649

## RACHETS 1/4"



**Model** Part#  
**RC3000** 8951078012

Model		RC3000
Anvil		1/4"
Torque M		20 Nm
Torque Mmax		30 Nm
Speed		230 min <sup>-1</sup>
Weight		0.55 kg
Hose		8 mm
Dimensions axbxc		180x35x31 mm
Air cons.		100 l/min
Air cons.		300 l/min
Air inlet		1/4" IG
Sound LpA		81.2 dB(A)
Vibration		3.91 m/s <sup>2</sup>

**Motor 30 Nm max.**



- 1/4" ratchet
- Length only 180 mm
- Rear exhaust

**Model** Part#  
**RC3001** 8951078022

Model		RC3001
Anvil		1/4"
Torque M		25 Nm
Torque Mmax		30 Nm
Speed		270 min <sup>-1</sup>
Weight		0.44 kg
Hose		8 mm
Dimensions axbxc		140x35x30 mm
Air cons.		115 l/min
Air cons.		490 l/min
Air inlet		1/4" IG
Sound LpA		91.8 dB(A)
Vibration		3.49 m/s <sup>2</sup>

**Only 140 mm**



- 1/4" mini-ratchet for use in confined areas
- Anti-slip coated handle
- Rear exhaust

**Model** Part#  
**RC3060** 8951078062

Model		RC3060
Anvil		1/4"
Torque M		20 Nm
Torque Mmax		45 Nm
Speed		250 min <sup>-1</sup>
Weight		0.65 kg
Hose		8 mm
Dimensions axbxc		205x42x32 mm
Air cons.		65 l/min
Air cons.		200 l/min
Air inlet		1/4" IG
Sound LpA		89.3 dB(A)
Vibration		2.89 m/s <sup>2</sup>

**Closed head Motor 45 Nm max.**



- 1/4" ratchet
- Flat, small ratchet head (32 mm) for confined areas
- Closed head design with 2 grease nipples for easy maintenance
- Pivotal air outlet, keeps air away from work
- Insulated handle

**Model**    **Part#**  
**RC3005**    *8951078042*

**Model**    **Part#**  
**RC3010**    *8951078013*

**Model**    **Part#**  
**RC3260**    *8951078033*

Model		RC3005
Anvil		3/8"
Torque M		20 Nm
Torque Mmax		30 Nm
Speed		230 min <sup>-1</sup>
Weight		0.55 kg
Hose		8 mm
Dimensions axbxc		180x35x33 mm
Air cons.		100 l/min
Air cons.		300 l/min
Air inlet		1/4" IG
Sound LpA		85.5 dB(A)
Vibration		4.29 m/s <sup>2</sup>
<b>Motor 30 Nm max.</b>		

Model		RC3010
Anvil		3/8"
Torque M		20 Nm
Torque Mmax		30 Nm
Speed		230 min <sup>-1</sup>
Weight		0.55 kg
Hose		8 mm
Dimensions axbxc		205x35x33 mm
Air cons.		100 l/min
Air cons.		300 l/min
Air inlet		1/4" IG
Sound LpA		84.2 dB(A)
Vibration		4.08 m/s <sup>2</sup>
<b>Motor 30 Nm max.</b>		

Model		RC3260
Anvil		3/8"
Torque M		20 Nm
Torque Mmax		45 Nm
Speed		250 min <sup>-1</sup>
Weight		0.65 kg
Hose		8 mm
Dimensions axbxc		205x42x34 mm
Air cons.		65 l/min
Air cons.		200 l/min
Air inlet		1/4" IG
Sound LpA		92.5 dB(A)
Vibration		3.23 m/s <sup>2</sup>
<b>Motor 45 Nm max.</b>		



- 3/8" ratchet
- Length only 180 mm
- Rear exhaust


- 3/8" ratchet
- Length only 205 mm
- Rear exhaust

- 3/8" ratchet
- Flat, small ratchet head (32 mm) for confined areas
- Closed head design with 2 grease nipples for easy maintenance
- Pivotal air outlet, keeps air away from work
- Insulated handle

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20



# RATCHETS 3/8" & 1/2"



**Model** Part#  
**RC3200** 8951078023

**Model** Part#  
**RC3100** 8951078004

**Model** Part#  
**RC3600** 8951078034

Model		RC3200
Anvil		3/8"
Torque M		40 Nm
Torque Mmax		60 Nm
Speed		160 min <sup>-1</sup>
Weight		1.2 kg
Hose		8 mm
Dimensions axbxc		255x47x42 mm
Air cons.		170 l/min
Air cons.		465 l/min
Air inlet		1/4" IG
Sound LpA		90.8 dB(A)
Vibration		3.39 m/s <sup>2</sup>
<b>Motor 60 Nm max.</b>		

Model		RC3100
Anvil		1/2"
Torque M		40 Nm
Torque Mmax		60 Nm
Speed		160 min <sup>-1</sup>
Weight		1.2 kg
Hose		8 mm
Dimensions axbxc		255x47x46 mm
Air cons.		170 l/min
Air cons.		465 l/min
Air inlet		1/4" IG
Sound LpA		93.2 dB(A)
Vibration		4.14 m/s <sup>2</sup>
<b>Motor 60 Nm max.</b>		

Model		RC3600
Anvil		1/2"
Torque M		60 Nm
Torque Mmax		90 Nm
Speed		170 min <sup>-1</sup>
Weight		1.25 kg
Hose		8 mm
Dimensions axbxc		275x43x49 mm
Air cons.		170 l/min
Air cons.		460 l/min
Air inlet		1/4" IG
Sound LpA		85.4 dB(A)
Vibration		4.95 m/s <sup>2</sup>
<b>Motor 90 Nm max.</b>		



- 3/8" standard ratchet
- Front exhaust
- Good handle grip

- 1/2" standard ratchet
- Front exhaust
- Good handle grip

- Proven 1/2" air ratchet
- Rear exhaust
- Motor housing with its flattened sides has a perfect grip to allow good control of the tool

**Model**    **Part#**  
**RC3607**    **8951078114**

**Model**    **Part#**  
**RC3700**    **8951078074**

Model		RC3607
Anvil		1/2"
Torque M		60 Nm
Torque Mmax		90 Nm
Speed		170 min <sup>-1</sup>
Weight		1.25 kg
Hose		8 mm
Dimensions axbxc		270x44x49 mm
Air cons.		170 l/min
Air cons.		460 l/min
Air inlet		1/4" IG
Sound LpA		88.2 dB(A)
Vibration		4.32 m/s <sup>2</sup>
<b>Motor 90 Nm max. Composit</b>		

Model		RC3700
Anvil		1/2"
Torque M		130 Nm
Torque Mmax		130 Nm (250H) Nm
Speed		320 min <sup>-1</sup>
Weight		1.6 kg
Hose		8 mm
Dimensions axbxc		312x52x52 mm
Air cons.		130 l/min
Air cons.		830 l/min
Air inlet		1/4" IG
Sound LpA		92 dB(A)
Vibration		3.19 m/s <sup>2</sup>
<b>Motor 130 Nm (250H) max. DuoPawl</b>		



- 1/2" air ratchet
- Ergonomic and powerful ratchet
- Cold-insulating composite handle
- Start lever sinks snugly into housing
- Simple to re-grease
- Rear exhaust



- 1/2" ratchet with 130 Nm motor power - by hand you can torque up to 250 Nm similar to using a spanner
- DUO-PAWL double ratchet pawl mechanism with 3-point-spring suspension for extreme torque and smooth operation with symmetrical blocking system
- Cold and vibration insulated handle
- Swiveling exhaust ring avoiding any disturbance from the exhausted air flow

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20

### Standard sockets in sets

Standard sockets with hex key, impact proof chrome-molybdenum quality, easy-to-read laser etched marking on each socket with model no. and key size

3/8" square	content size of hex mm	Part#
RS3113	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19	8951012354



1/4" square	Part#
6 Point impact sockets 8, 9, 10, 11, 12 mm	
1/4" 50 mm long Torx bits T15 - T20 - T25 - T30 - T40	
RS2116 1/4" 50 mm hexagonal bits: 5 - 6 - 8 - 10 mm	8951000146
1/4" square to 1/4" hexagonal adaptor	
1/4" quick change bit holder	



1/2" square	Part#
RS4114 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27	8951012356

3/4" square	Part#
RS618 26, 27, 29, 30, 32, 35, 36, 38	8951012358

1" square	Part#
RS818 27, 30, 32, 33, 35, 36, 38, 41	8951012360

### Deep sockets in sets

Deep sockets with hex key, for hard to reach areas

1/2" square	Part#
RS4114D 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26, 27	8951012357
RS413DTW 17, 19, 21	8951012353

3/4" square	Part#
RS618D 26, 27, 29, 30, 32, 35, 36, 38	8951012359

1" square	Part#
RS814D 27, 32, 33, 36	8951012361



### Individual deep sockets

Individual pieces of the most common sockets in the vehicle service business

1/2" square	content size of hex mm	Part#
R417MD	17	8951012364
R419MD	19	8951012365
R421MD	21	8951012366
<b>1" square</b>		
R833MD	33	8951012370



**Anti scratch**

Sockets with hex key, with anti-scratch protection, extra thin-walled for alloy rims, painted rims and polished cap nuts, impact proof chrome-molybdenum quality, easy-to-read marking on each socket with key size. Options with 80 mm (deep) and 130 mm (long) for sports cars

**Model** Part#  
**RS413WP** 8951012362 (length 80 mm)



Model	content size of hex mm
RS413WP	17, 19, 21

**Model** Part#  
**RS414WP** 8951012363  
 Similar features to the RS413WP (length 80 mm)



Model	content size of hex mm
RS414WP	17, 19, 21, 22

**Model** Part#  
**RS413LWP** 8951000054  
 Similar features to the RS413WP but length 130 mm



Model	content size of hex mm
RS413LWP	17, 19, 21

Individual pieces of the most common sockets in the tyre changing business

Model	Length	Part#
R417MWP	short L=85 mm	8951012372
R417LWP	long L=130 mm	8955000051
R419MWP	short L=85 mm	8951012373
R419LWP	long L=130 mm	8955000052
R421MWP	short L=85 mm	8951012374
R421LWP	long L=130 mm	8955000053

Model		Part#
KSW21LK	PVC-sleeve for R421MWP (10 pcs)	8951011404
KSW22LK	PVC-sleeve for R422MWP (10 pcs)	8951011405



**1/2" Torsion**

**Model** Part#  
**RS435B** 8951012378

Torsion bars with both ends 1/2" square drive (male and female), total length 194 mm



Model	data on bar (colour)	
RS435B	100 Nm (black), 120 Nm (white), 150 Nm (orange)	110 Nm (blue), 135 Nm (grey)

**1/2" Inbus**

**Model** Part#  
**RS438A** 8951012376

Special sockets with hexagonal (Allen, Inbus) male key ends - indispensable for many vehicle applications like truck doors, covers etc. - length 79 mm



Model	shape and size
RS438A	H6, H7, H8, H10, H12, H14, H17, H19

**1/2" Torx**

**Model** Part#  
**RS438T** 8951012377

Special sockets with Star tip (TORX) male key ends - indispensable for many vehicle applications like truck doors, covers etc. - length 79 mm



Model	shape and size
RS438T	T25, T27, T30, T40, T45, T55, T60

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20



**RC4784**



## 02| Assembly

### | Screwdrivers

- Straight screwdrivers
- Pistol screwdrivers

01

**02**

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20


## SCREWDRIVER



**Model** Part#  
**RC4784** 8951073023

Model		RC4784
Min Torque		1 Nm
Max Torque		6 Nm
Bit Drive		1/4" Fem.Hex QC
Adjustment		External
Speed		1770 rpm
Weight		0,92 kg
Hose		8 mm
Dimensions axbxc		165x160x45 mm
Air cons. ave.		440 l/min
Air cons.		595 l/min
Air inlet		1/4" IG
Clutch Type		Roller*
Sound LpA		80.3 dB(A)
Vibration		< 2,5 m/s <sup>2</sup>

**6 Nm external adjustment**



- Lightweight thanks to composite material
- Ergonomic rubber handle
- Precise adjustable speed up to 1770 rpm
- Also for use with balancer
- The tool offers 3 possible connections to compressed air supply
- To use upper or side air inlet pls. use model AR1 or regulateable swivel joint DG1R for regulating incoming air
- Quick coupler for screw driver bits
- Forward / reverse switch

- \*R: shut-off by slip clutch
- D: motorstart per push button and proof

**Model** Part#  
**RC4760** 8951073012

Model		RC4760
Min Torque		1 Nm
Max Torque		7 Nm
Bit Drive		1/4" Fem.Hex QC
Adjustment		Internal
Speed		2000 rpm
Weight		1,10 kg
Hose		8 mm
Dimensions axbxc		242x42 mm
Air cons. ave.		350 l/min
Air cons.		470 l/min
Air inlet		1/4" IG
Clutch Type		Roller
Sound LpA		88.7 dB(A)
Vibration		< 2,5 m/s <sup>2</sup>

**7 Nm inner adjustment**



- Large straight tool, for fast assembly
- Easy to reach forward/reverse shift which can be locked in reverse for longer disassemblies
- Quick coupler for screw driver bits
- Forward / reverse switch


**Model** Part#  
**RC4700** 8951073002

Model		RC4700
Min Torque		1 Nm
Max Torque		7 Nm
Bit Drive		1/4" Fem.Hex QC
Adjustment		Internal
Speed		2100 rpm
Weight		1,15 kg
Hose		8 mm
Dimensions axbxc		210x150x42 mm
Air cons. ave.		430 l/min
Air cons.		585 l/min
Air inlet		1/4" IG
Clutch Type		Roller
Sound LpA		88.6 dB(A)
Vibration		< 2,5 m/s <sup>2</sup>

**7 Nm inner adjustment**



- Popular short screwdriver
- High speed
- Quick coupler for screw driver bits
- Forward / reverse switch



# The right tool for your needs !

Simple setting of the shut-off torque from outside on front ring

Hanger for balancer



Composite housing with insulating rubber handle

Practical thumb switch for forward / reverse

Silenced / down handle exhaust

**RC4784**

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



RC4607

## 03| Drilling

### | Drills

- 6,5 mm drills
- 10 mm drills
- 13 mm drills

### | Accessories

- Key chucks
- Keyless chucks

01

02

**03**

04

05

06

07

08

09

10

11

12

13

14

15

16

17


18

19

20



# DRILLS 6,5 & 10 MM



**Model** Part#  
**RC4105** 8951073001

**Model** Part#  
**RC4100** 8951073000

**Model** Part#  
**RC4107** 8951073011

Model	RC4105
Drill diam.	6.5 mm
Power	180 W
Speed	3000 rpm
Weight	0.58 kg
Hose	8 mm
Dimensions axbxc	165x160x38 mm
Air cons. ave.	330 l/min
Air cons.	440 l/min
Air inlet	1/4" IG
Sound LpA	71.3 dB(A)
Vibration	3.24 m/s <sup>2</sup>
<b>Reverse switch Composite</b>	

Model	RC4100
Drill diam.	10 mm
Power	500 W
Speed	2200 rpm
Weight	0.95 kg
Hose	8 mm
Dimensions axbxc	193x132x42 mm
Air cons. ave.	350 l/min
Air cons.	470 l/min
Air inlet	1/4" IG
Sound LpA	86.7 dB(A)
Vibration	3.19 m/s <sup>2</sup>
<b>Only forward</b>	

Model	RC4107
Drill diam.	10 mm
Power	380 W
Speed	2200 rpm
Weight	0.93 kg
Hose	8 mm
Dimensions axbxc	220x100x50 mm
Air cons. ave.	480 l/min
Air cons.	650 l/min
Air inlet	1/4" IG
Sound LpA	81.3 dB(A)
Vibration	3.06 m/s <sup>2</sup>
<b>Reverse switch Composite</b>	



- Ergonomic and lightweight drill with 6,5 mm key-chuck
- Insulating composite handle with rubber grip
- Precise to regulate the speed
- Well suited for use with balancers/hose balancers due to its 3 connecting possibilities for compressed air supply



- Handy drill with short design
- Including a RÖHM® - quick chuck up to 10 mm (3/8")




- Ergonomic and lightweight tool with anti-slip rubber patches
- Precise adjustable speed for cautious start-ups
- Silenced
- Well suited for use with balancers/hose balancers due to its 3 connecting possibilities for compressed air supply.
- Equipped with high quality key-less chuck from "RÖHM®"

## Balancers

**Model** Part#  
**RC9311** 8951011260



- Capacity 0,4 to 1 kg
- Stroke 1600 mm



**Model** Part#  
**RC4500** 8951073021

**Model** Part#  
**RC4607** 8951073090

Model		RC4500
Drill diam.		10 mm
Power		500 W
Speed		2000 rpm
Weight		1.15 kg
Hose		8 mm
Dimensions axbxc		192x152x42 mm
Air cons. ave.		460 l/min
Air cons.		620 l/min
Air inlet		1/4" IG
Sound LpA		92.7 dB(A)
Vibration		3.16 m/s <sup>2</sup>

Reverse switch



- Compact tool with forward/reverse switch on handle
- Equipped with RÖHM®-quick chuck up to 10 mm (3/8").

Model		RC4607
Drill diam.		10 mm
Power		500 W
Speed		2000 rpm
Weight		1.00 kg
Hose		8 mm
Dimensions axbxc		225x40x42 mm
Air cons. ave.		380 l/min
Air cons.		510 l/min
Air inlet		1/4" IG
Sound LpA		81.3 dB(A)
Vibration		3.37 m/s <sup>2</sup>

Composite



- High quality drill with double front bearing
- 3-planet-gear
- Down-handle exhaust with muffler
- Equipped with 10 mm (3/8") quality RÖHM®- quick key-less chuck
- Cold-insulating composite handle




## Balancers

**Model** Part#  
**RC9312** 8951011261



- Capacity 1 to 2kg
- Stroke 1600 mm

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20



**Model** Part#  
**RC4650** 8951073050

**Model** Part#  
**RC4550** 8951073031

Model		RC4650
Drill diam.		10 mm
Power		500 W
Speed		1500 rpm
Weight		1.10 kg
Hose		8 mm
Dimensions axbxc		210x42x84 mm
Air cons. ave.		330 l/min
Air cons.		450 l/min
Air inlet		1/4" IG
Sound LpA		89.9 dB(A)
Vibration		3.14 m/s <sup>2</sup>
<b>Reverse switch</b>		

Model		RC4550
Drill diam.		13 mm
Power		500 W
Speed		800 rpm
Weight		1.40 kg
Hose		8 mm
Dimensions axbxc		220x150x42 mm
Air cons. ave.		430 l/min
Air cons.		585 l/min
Air inlet		1/4" IG
Sound LpA		91.9 dB(A)
Vibration		4.51 m/s <sup>2</sup>
<b>Reverse switch</b>		



- Slim tool with 84 mm height
- With RÖHM® - key chuck up to 10 mm (3/8")

- Reversible 13 mm (1/2") drill
- Double 3-planet-gear
- Double front bearing for tough applications
- With precise RÖHM® - quick key-less chuck
- Detachable side handle

# Powerful & precise



10 mm RÖHM®  
key less chuck

Adjustable power

Down handle exhaust with  
possibility of connecting  
exhaust-silencing hose

Composite housing with  
isolating rubber grip

Safety lever

## Drill chuck with precision

Fast key & key-less chuck from "RÖHM®"

**Key chuck** (with key 6,5-13 mm)  
up to 6,5 mm 8951011473  
up to 10 mm 8951011451  
up to 13 mm 8951011452  
key 8951011453

**Key-less chuck**  
up to 10 mm 8951011458  
up to 13 mm 8951011459



## Balancers

In order to design an ergonomic and efficient work station, the straight drills often need to be equipped with balancers as well as straight-ended spiral hoses or hose balancers. (See page 101).



**RC4607**

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20



**RC5195**



## 04| Chipping

### | Chisel hammers

- 11 mm hex hammers
- 12 mm hex hammers
- 14,7 mm hex hammers

### | Accessories

- Chisels
- Retainer
- Quick chuck

01

02

03

**04**

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20





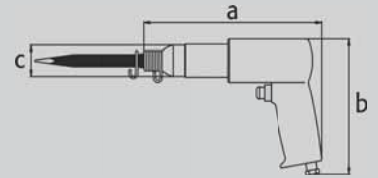





# CHISEL HAMMER CHISEL HAMMER SETS




**Model** Part#  
**RC5100** 8951071022

**Model** Part#  
**RC5120** 8951171013

**Model** Part#  
**RC5160** 8951171033

Model	RC5100	
Chisel insert		11 mm/0.433 in.
Piston Stroke / ø		60/19 mm
Blows		3000 min <sup>-1</sup>
Weight		1.5 kg
Hose		8 mm
Dimensions axbxc		200x160x39 mm
Air cons. ave.		270 l/min
Air cons.		400 l/min
Air inlet		1/4" IG
Blow energy		6 Joule
Sound LpA		94.8 dB(A)
Vibration		13.2 m/s <sup>2</sup>

**6 joule**



- Compact chisel hammer with 11 mm hex shank
- Adjustable blow power
- Including retainer spring RC70

## Set for car body / metal

Air hammer set hexagonal 11 mm for metal and sheet metal applications in tool box with:

Air hammer model	RC5100
Spring retainer model	RC70
Deriveting chisel model	RC22S
Welding spot splitting chisel model	RC19S
Double blade cutting chisel model	RC60S
Flat chisel model	RC20S
Curve splitting chisel model	RC18S



**Model** Part#  
**RC5150** 8951171023

## Set for stone / concrete

Air hammer set hexagonal 11 mm for stone and concrete applications in tool box with:

Air hammer model	RC5100
Solid retainer model	RC76-1
Pointed chisel 240 mm length model	SS10
Flat chisel 240 x 20 mm model	SS20
Flat chisel 240 x 30 mm model	SS30
Flat chisel 240 x 40 mm model	SS40
Groove chisel 240 mm model	SS50













## Set for brake pads / riveting

Air hammer set hexagonal 11 mm for truck brake pad riveting and removal for hollow aluminium or copper rivets in tool box with:


Air hammer model	RC5100
Spring retainer model	RC70
Rivet head 8 mm (6 / 10 mm*) model (*optional sizes)	RC40S-8
Deriveter chisel 8 mm (10 mm*) model	RC41S-8
Counter holder (anvil) model	RC42S-8



**Model** Part#  
**RC5185** 8951000152







Model	RC5185
Chisel insert	 11 mm/0.433 in.
Piston Stroke / ø	70/19 mm
Blows	 3000 min <sup>-1</sup>
Weight	 1.7 kg
Hose	 8 mm
Dimensions axbxc	 179x163x57 mm
Air cons. ave.	 250 l/min
Air cons.	 372 l/min
Air inlet	 1/4" IG
Blow energy	9 Joule
Sound LpA	 102 dB(A)
Vibration	 8.2 m/s <sup>2</sup>

**9 joule**




- Quick change retainer for fast chisel changes (provided with the tool)
- High resistance throttle & bushing valves
- Teasing trigger
- Aluminum housing
- Back part designed for great handling
- Curved handle with TPR injection on the back part
- Rear exhaust

**Model** Part#  
**RC5195** 8951000154

Model	RC5195
Piston Stroke / ø	 95/19 mm
Blows	 2100 min <sup>-1</sup>
Weight	 2 kg
Hose	 8 mm
Dimensions axbxc	 223x163x57 mm
Blow energy	12 Joule
Vibration	 11.9 m/s <sup>2</sup>

**12 joule**



**Model** Part#  
**RC5185K-M** 8951000153  
**RC5195K-M** 8951000155

**Set for metal**

Set with hexagon chisels (11 mm):

- 1 chisel hammer RC5185 or RC5195 with steel retainer
- 1 Universal chisel - 135 x 19 mm RC73
- 1 De-riveting - 140 x 20 mm RC20S
- 1 Spot weld chisel - 140 x 29 mm RC22S
- 1 Curve cutting chisel 1mm thick - 140 mm RC19S
- 1 tool box RC18S

**Model** Part#  
**RC5185K-C** 8951000208  
**RC5195K-C** 8951000209

**Set for stone / concrete**

Set with hexagon chisels (11 mm):

- 1 chisel hammer RC5185 or RC5195 with steel retainer
- 1 Pointed chisel - 135 mm RC73
- 1 Flat chisel - 140 x 20 mm SS10K
- 1 Flat chisel - 140 x 30 mm SS20K
- 1 Flat chisel - 135 x 40 mm SS30K
- 1 tool box SS40K

## Low Vibration & Powerful

**Easy to operate:**  
 Quick change retainer for fast chisel changes (provided with the tool)

**High Effectiveness:**  
 Back part designed for great handling



**High resistance throttle & bushing valves teasing trigger**












**Comfort & Insulation:**  
 Curved handle with TPR injection on the back part




**RC5185**

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20

**Model** Part#  
**RC5176** 8951171043












Model	RC5176	
Chisel insert		11 mm/0.433 in.
Piston Stroke / ø		94/19 mm
Blows		2100 min <sup>-1</sup>
Weight		2.05 kg
Hose		8 mm
Dimensions axbxc		245x162x39 mm
Air cons. ave.		260 l/min
Air cons.		380 l/min
Air inlet		1/4" IG
Blow energy		9 Joule
Sound LpA		97.3 dB(A)
Vibration		4.5 m/s <sup>2</sup>

Set for stone / concrete




- Hammer with extra long stroke
- Adjustable impacting power, easy to control
- For hexagonal chisels 11 mm
- Including hammer spring RC70

**Model** Part#  
**RC5305** 8951071065

Model	RC5305	
Chisel insert		12 mm/0.472 in.
Piston Stroke / ø		50/20 mm
Blows		3000 min <sup>-1</sup>
Weight		2.55 kg
Hose		8 mm
Dimensions axbxc		294x150x44 mm
Air cons. ave.		260 l/min
Air cons.		380 l/min
Air inlet		1/4" IG
Blow energy		6 Joule
Sound LpA		98.8 dB(A)
Vibration		5.5 m/s <sup>2</sup>












12 mm hexagonal
















- Small straight hammer for metal or stone for chisels with 12 mm hex shank
- With steel retainer RC76-3

**Model** Part#  
**RC5310** 8951171053

**Model** Part#  
**RC5400** 8951071076

Model	RC5310	
Chisel insert		12 mm/0.472 in.
Piston Stroke / ø	50/20 mm	
Blows		3000 min <sup>-1</sup>
Weight		2.55 kg
Hose		8 mm
Dimensions axbxc		294x150x44 mm
Air cons. ave.		260 l/min
Air cons.		380 l/min
Air inlet		1/4" IG
Blow energy		6 Joule
Sound LpA		98.8 dB(A)
Vibration		7.9 m/s <sup>2</sup>
<b>6 joule</b>		

Model	RC5400	
Chisel insert		14.7 mm/0.579 in.
Piston Stroke / ø	76/29 mm	
Blows		1700 min <sup>-1</sup>
Weight		7.5 kg
Hose		13 mm
Dimensions axbxc		420x175x57 mm
Air cons. ave.		480 l/min
Air cons.		720 l/min
Air inlet		3/8" IG
Blow energy		22 Joule
Sound LpA		99 dB(A)
Vibration		13.8 m/s <sup>2</sup>
<b>22 joule</b>		



- Air hammer set hexagonal 12 mm for stone and concrete applications in tool box with:
- Air hammer model RC5305
- Steel retainer model RC76-3
- Pointed chisel 210 mm length model RC51S
- Flat chisel 210 x 20 mm model RC52S
- Flat chisel 210 x 30 mm model RC53S
- Flat chisel 210 x 40 mm model RC54S

- Large hammer for chisel insert size 14,7 mm hexagonal for heavy duty applications
- Equipped with steel retainer

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20



For Model 5100-5195

**for metal applications****Splitting chisel**

135 mm



**Model** Part#  
**RC14S** 8951011923

**Self-guided cutting chisel**

127 mm



**Model** Part#  
**RC16S** 8951011924

**Curve cutting chisel for metal 1mm thick**

140 mm



**Model** Part#  
**RC18S** 8951011925

**Spot weld chisel**

29x140 mm



**Model** Part#  
**RC19S** 8951011926

**Universal chisel**

19x135 mm



**Model** Part#  
**RC20S** 8951011927

**Deriveting chisel**


20x140 mm



**Model** Part#  
**RC22S** 8951011928

**Double cutting chisel for metal**

140 mm



**Model** Part#  
**RC60S** 8951011930

**for concrete and stone applications****Flat chisel 20 mm**

210 mm



**Model** Part#  
**SS20** 8951011934

140 mm



**Model** Part#  
**SS20K** 8951011935

**Flat chisel 30 mm**

205 mm



**Model** Part#  
**SS30** 8951011936


140 mm



**Model** Part#  
**SS30K** 8951011937

**Flat chisel 40 mm**

210 mm



**Model** Part#  
**SS40** 8951011938

135 mm



**Model** Part#  
**SS40K** 8951011939

**Kit 8951011931**

**Kit RC618 8951011931**  
**Includes:** RC18S, RC19S, RC20S, RC60S,  
RC22S





For Model  
5100-5195



For Model  
5305

### Raw chisel

12x123 mm



**Model** Part#  
**RC30S** 8951011929

### Pointed chisel

210 mm



**Model** Part#  
**SS10** 8951011932

135 mm



**Model** Part#  
**SS10K** 8951011933

### Riveting chisel



**Model** Part#  
**RC40S-6** 6 mm 8951011942  
**RC40S-8** 8 mm 8951011943  
**RC40S-10** 10mm 8951011941

### Deriveting chisel



**Model** Part#  
**RC41S-8** 6 mm 8951011945  
**RC41S-10** 8 mm 8951011944


### Riveting block for vice



**Model** Part#  
**RC42S-6** 6 mm 8951011947

### Pointed chisel

160 mm



**Model** Part#  
**RC51S** 8951011949

### Flat chisel 20 mm

200 mm



**Model** Part#  
**RC52S** 8951011950

### Flat chisel 30 mm

200 mm



**Model** Part#  
**RC53S** 8951011951

### Flat chisel 40 mm

200 mm



**Model** Part#  
**RC54S** 8951011952



For Model  
5400

### Flat chisel 30 mm

30x190 mm



**Model** Part#  
**RC92** 8951011953

### Pointed chisel

185 mm



**Model** Part#  
**RC93S** 8951011954

### Retainer spring



**Model** Part# For  
**RC70** 8951011958 5100-5195

### Retainer aluminium



**Model** Part# For  
**RC76** 8951011961 5100-5195

### Retainer steel



**Model** Part# For  
**RC76-1** 8951011962 5100  
**RC76-3** 8951011964 5305  
**RC94** 8951011955 5400

### Quick chuck



**Model** Part# For  
**RC73** 8951011960 5100-5195

### Spring for steel cap



**Model** Part# For  
**RC79** 8951011963 5305  
**RC95** 8951011956 5400

### Needle scaler attachment



**Model** Part# for  
**RC5605** 8951076000 5100-5195

### Needle set



**Model** Part#  
**RC5605 Needle set 3mm** 8940159860

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20



RC5620

## 05| Descaling

- | Needle Scalers
  - Straight scalers
  - Pistol scalers
  
- | Accessories
  - Needles
  - Needle plates

01

02

03

04

**05**

06

07

08

09

10

11

12

13

14

15

16


17

18

19

20

# NEEDLE SCALER



**Model** Part#  
**RC5610** 8951076001

**Model** Part#  
**RC5615** 8951076002

**Model** Part#  
**RC5620** 8951076003

Model	RC5610	
Needle capacity		19 x 3 mm
Blows		4000 min <sup>-1</sup>
Weight		2.55 kg
Hose		8 mm
Dimensions axbxc		468x44 mm
Air cons. ave.		190 l/min
Air cons.		280 l/min
Air inlet		1/4" IG
Sound LpA		89.5 dB(A)
Vibration		16.8 m/s <sup>2</sup>
<b>Needle set 19 x 3 mm + scraper 20 mm</b>		

Model	RC5615	
Needle capacity		12 x 3 mm
Blows		4000 min <sup>-1</sup>
Weight		1.3 kg
Hose		8 mm
Dimensions axbxc		290x35 mm
Air cons. ave.		120 l/min
Air cons.		180 l/min
Air inlet		1/4" IG
Sound LpA		88.1 dB(A)
Vibration		11.4 m/s <sup>2</sup>
<b>Needle set 12 x 3 mm</b>		

Model	RC5620	
Needle capacity		28 x 3 mm / 14 x 4 mm
Blows		4500 min <sup>-1</sup>
Weight		3.6 kg
Hose		13 mm
Dimensions axbxc		345x180x61 mm
Air cons. ave.		200 l/min
Air cons.		300 l/min
Air inlet		3/8" IG
Sound LpA		97.6 dB(A)
Vibration		13.7 m/s <sup>2</sup>
<b>Needle set 19 x 3 and 14 x 4 mm</b>		



- Combination tool for two cleaning processes
- Scraping off layers and surfaces with scraper
- Derusting around details with needles
- Incl. scraper and 19x3 mm needles

- Small, straight needle scaler for wheel rims, frames and work in limited space
- Incl. 12 x 3 mm needles

- Powerful needle scaler for rough removals
- Incl. 14 x 4 mm needles and for large surfaces 28 x 3 mm needles

## Accessories for RC5610

Needle set 19 pcs. @ 3 mm (Length 180 mm)	Part# 8940159860	
Needle plate 19 holes @ 3 mm	Part# 8951011510	
Scaler 20 mm	Part# 8951011497	


## Accessories for RC5615

Needle set 12 pcs. @ 3 mm (Length 120 mm)	Part# 8951011498	
Needle plate 12 holes @ 3 mm	Part# 8951011511	

## Accessories for RC5620

Needle set 14 pcs. @ 4 mm 28 pcs. @ 3 mm (Length 180 mm)	Part# 8951011501 8951011500	
Needle plate 14 holes @ 4 mm 28 holes @ 3 mm	Part# 8951011503 8951011502	

# NEEDLE SCALER

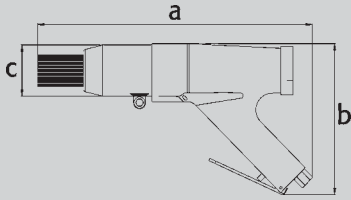

**Model**    **Part#**  
**RC5625**   **8951076004**

Model		RC5625
Needle capacity		29 x 2 mm / 19 x 3 mm
Blows		3000 min <sup>-1</sup>
Weight		2.7 kg
Hose		8 mm
Dimensions axbxc		320x175x47 mm
Air cons. ave.		120 l/min
Air cons.		170 l/min
Air inlet		1/4" IG
Sound LpA		94 dB(A)
Vibration		17.7 m/s <sup>2</sup>

**Needle set 29 x 2 mm and 19 x 3 mm**



- To work with small details use 29 x 2 needles
- For rough work 19 x 3 mm needles insulated handle and front exhaust

## Accessories for RC5625

Needle set                      **Part#**  
 19 pcs. @ 3 mm              8940159860

29 pcs. @ 2 mm              8951011504

(Length 180 mm)

Needle plate                    **Part#**  
 19 holes @ 3 mm            8951011513

29 holes @ 2 mm            8951011512

- 01
- 02
- 03
- 04
- 05**
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



RC6067



## 06| Speciality tools

### | Cutting tools

- Loppers
- Shears
- Nibbler
- Punching / welting tool
- Files
- Spot weld drills
- Saws

### | Accessories

- Saw blades
- Files

01

02

03

04

05

**06**

07

08

09

10

11

12

13

14

15


16

17

18

19

20



**Model** Part#  
**RC6220** 8951076010

Model		RC6220
Weight		0.65 kg
Hose		8 mm
Dimensions axbxc		258x116x120 mm
Air cons.		0.5 l/min
Air inlet		1/4" IG
Sound LpA		65.2 dB(A)
Vibration		2.97 m/s <sup>2</sup>

**For wood, twigs & plastic**



- Pruning shear for max. diameter 15 mm
- Cuts wood, plastics and other soft materials, profiles, rods
- Safety latch against accidental cutting
- Knuckle protector

**Model** Part#  
**RC6210** 8951076009

Model		RC6210
Cutting speed.		2 m/min
Cutting capacity		1.5 mm
Cutting width		5 mm
Weight		1.2 kg
Hose		8 mm
Dimensions axbxc		265x64x55 mm
Air cons.		360 l/min
Air cons.		540 l/min
Air inlet		1/4" IG
Sound LpA		87.2 dB(A)
Vibration		4.81 m/s <sup>2</sup>

**Shear 5 mm**



- Cuts in the middle keeping the material on both sides almost untouched
- Raw material and cut off part both remain in good shape
- Cutting width 5 mm at 2 m/min
- For thicknesses up to 1,5 mm (normal car body sheet metal and aluminium)
- Cutting curves possible over 100 mm radius




**Model** Part#  
**RC6212** 8951076020

Model		RC6212
Cutting speed.		2 m/min
Cutting capacity		1.5 mm
Cutting width		5 mm
Weight		1.2 kg
Hose		8 mm
Dimensions axbxc		265x40x60 mm
Air cons.		360 l/min
Air cons.		540 l/min
Air inlet		1/4" IG
Sound LpA		87.2 dB(A)
Vibration		4.81 m/s <sup>2</sup>

**Composite shear 5 mm hear 5 mm**



- Cuts in the middle keeping the material on both sides in good shape
- Cutting width 5 mm at 2 m/min
- For thicknesses up to 1,5 mm (normal car body sheet metal and aluminium)
- Cutting curves possible over 100 mm radius
- Cold-insulating composite handle with integrated
- Rubber patches for better grip

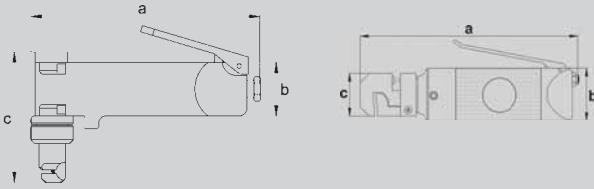

**Model** Part#  
**RC6100** 8951076008

**Model** Part#  
**RC6301** 8951076011

**Model** Part#  
**RC6453** 8951076013

Model	RC6100
Cutting speed.	2.6 m/min
Cutting capacity	1 mm
Cutting width	4 mm
Weight	0.95 kg
Hose	8 mm
Dimensions axbxc	262x38 mm
Air cons.	360 l/min
Air cons.	540 l/min
Air inlet	1/4" IG
Sound LpA	91.6 dB(A)
Vibration	8.55 m/s <sup>2</sup>

For sheet metal



- Sheet metal nibbler for shaping normal car body
- Material as well as aluminium sheet metal up to 1 mm thickness
- For cutting of small curves or for enlarging holes
- Cutting width 4 mm and cutting speed 2,6 m/min.
- Easy to maintain piston
  - regreasing through lid on top
- Punch and die plate are exchangeable



Model	RC6301
Tool	22x12x1,2 / ø 5x1,2
Weight	1 kg
Hose	8 mm
Dimensions axbxc	245x54 mm
Air cons.	0.8 l/min
Air inlet	1/4" IG
Sound LpA	70.6 dB(A)
Vibration	3.97 m/s <sup>2</sup>

2 in 1: punching & welting



- Much less tiring to work with than manual tools
- For preparation of up to 1.2 mm sheet metal
- Parts for car body or aluminium before welding
- Punch diameter 5 mm for spot welding
- Equipped with air-hydraulic multiplier system

Model	RC6453
Tool	ø 8
Stroke/min	2000 min <sup>-1</sup>
Weight	1,15 without counter arm
Hose	8 mm
Dimensions axbxc	285x215x75 mm
Air cons.	110 l/min
Air cons.	240 l/min
Air inlet	1/4" IG
Sound LpA	88.8 dB(A)
Vibration	< 2,5 m/s <sup>2</sup>

8 mm fraiser bit swiveling conterman





- Fraiser for precise removal of spot welding points for example: car body parts
- Fraising bit is pushed automatically onto the sheet metal by compressed air and the tool begins to run, removing only the point from one layer of the bonding. The lower layer of sheet metal is not drilled
- Adjustable fraising depth by 50 micron steps
- Includes a 75 mm deep counter arm (swivels and can be removed)
- Only usable with fraising bits length 47mm

## Accessories for RC6453

### Fraising Bits

For the precise removal of welding spots without drilling through the "good" side of the sheet metal. Made of very hard cobalt steel HSCo

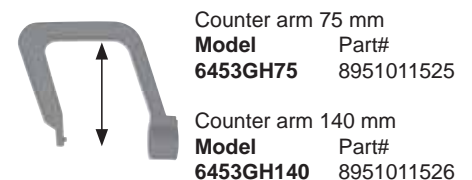

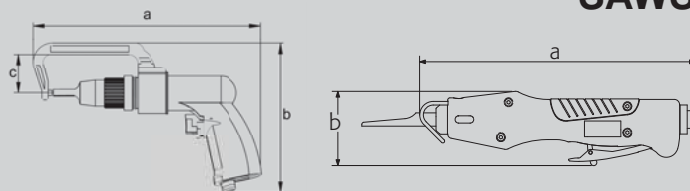

**Model** Part#  
**RC6900** 8951075000

**Model** Part#  
**RC6050** 8951079001

**Model** Part#  
**RC6067** 8951079011

Model		RC6900
Drive $\varnothing$		6.5 mm
Strokes		3700 min <sup>-1</sup>
Weight		1.1 kg
Hose		8 mm
Dimensions axbxc		165x48x28 mm
Air cons.		120 l/min
Air cons.		170 l/min
Air inlet		1/4" IG
Sound LpA		84.5 dB(A)
Vibration		8.61 m/s <sup>2</sup>

**Small file**



- For deburring or shaping sheet metal, iron, plastics, deburring
- Double piston drive
- Including file set with 4 different files (flat, half round, round, triangular)

Model		RC6050
Stroke		10 mm
Stroke/min		9500 min <sup>-1</sup>
Weight		0.65 kg
Hose		8 mm
Dimensions axbxc		262x38 mm
Air cons.		220 l/min
Air cons.		330 l/min
Air inlet		1/4" IG
Sound LpA		79.9 dB(A)
Vibration		12.57 m/s <sup>2</sup>

**Easy exchange of blades - rear exhaust**



- Fast and handy air saw for sheet metals
- Insulated handle
- Exhaust guided to the rear side
- Ideally suited for precise cutting of car body parts, profiles and sun roofs
- 10 mm stroke

**Model** Part#  
**RC6051** 8951179000

Saw Set in tool box including:  
1 saw model RC6050  
5 saw blades fine (32 teeth per inch)  
5 saw blades medium (24 teeth per inch)  
1 mini lubricator model G1K and 1 universal air joint model DG1 and keys



Model		RC6067
Stroke		10 mm
Stroke/min		10000 min <sup>-1</sup>
Weight		0.51 kg
Hose		8 mm
Dimensions axbxc		262x38 mm
Air cons.		150 l/min
Air cons.		225 l/min
Air inlet		1/4" IG
Sound LpA		79.9 dB(A)
Vibration		6.32 m/s <sup>2</sup>

**Low vibration & composite - rear exhaust**



- Powerful air saw with composite handle
- Rear exhaust
- Suitable to cut through profiles and multiple layer sheet metals
- Using long saw blades larger tubes and profiles can even be cut in one
- 10000 strokes/min.
- Using a file adapter the tool can also be converted into an air file (extra accessory)

**Accessories for RC6900**

See page 51



## Saw blades - standard length



For model	Part# 8951011514
<b>RC6050</b> <b>RC6067</b>	Teeth / inch: 32 Distance of teeth: 0,8 mm Material: Bi-Metal A: 4,2 mm

Useable for:  
steel, sheet metal, car body

For Model	Part# 8951011515
<b>RC6050</b> <b>RC6067</b>	Teeth / inch: 24 Distance of teeth: 1,0 mm Material: Bi-Metal A: 4,2 mm

Useable for:  
casted iron, aluminium, copper, zinc,  
composite, bumper


For model	Part# 8951011520
<b>RC6050</b> <b>RC6067</b>	Teeth / inch: 18 Distance of teeth: 1,4 mm Material: Bi-Metal A: 4,2 mm

Useable for:  
plastic, wood, bumper

For model	Part# 8951011519
<b>RC6050</b> <b>RC6067</b>	Teeth / inch: 14 Distance of teeth: 1,8 mm Material: Bi-Metal A: 4,2 mm

Useable for:  
plastic and wood

## Saw blades - extra long



For model	Part# 8951011521
<b>RC6050</b> <b>RC6067</b>	Teeth / inch: 32 Distance of teeth: 0,8 mm Material: Bi-Metal A: 4,2 mm

Useable for: steel, sheet metal, car body


For model	Part# 8951011522
<b>RC6050</b> <b>RC6067</b>	Teeth / inch: 24 Distance of teeth: 1,0 mm Material: Bi-Metal A: 4,2 mm

Useable for: casted iron, aluminium, copper,  
zinc, composite, bumper

For model	Part# 8951011523
<b>RC6050</b> <b>RC6067</b>	Teeth / inch: 18 Distance of teeth: 1,4 mm Material: Bi-Metal A: 4,2 mm

Useable for:  
plastic, wood, bumper

## Saw blades - SIG Type



For model	Part# 8951011523
<b>RC6067</b>	Teeth / inch: 18 Distance of teeth: 1,4 mm Material: Bi-Metal A: 4,2 mm

Useable for: plastic, wood, bumper

For model	Part# 8951011517
<b>RC6067</b>	Teeth / inch: 32 Distance of teeth: 0,8 mm Material: Bi-Metal A: 4,2 mm

Useable for: steel, sheet metal

For model	Part# 8951011516
<b>RC6067</b>	Teeth / inch: 24 Distance of teeth: 1,0 mm Material: Bi-Metal A: 4,2 mm

Useable for:  
casted iron, aluminium, copper, zinc, composite

For model	Part# 8951011518
<b>RC6067</b>	Teeth / inch: 14 Distance of teeth: 1,8 mm Material: Bi-Metal A: 4,2 mm

Useable for:  
aluminium, copper, zinc, composite, wood

## Accessories for files

### File adapter



For model	Part# 8951011531
<b>RC6067</b>	needed for using files with saw RC6067

### Set of files



For model	Part# 8951011529
<b>RC6900</b> <b>RC6067*</b>	included files: flat, round half-rounded, triangular

\* only useable with adapter 8951011531

### Individual files



For model	Part# 8951011532
<b>RC6900</b> <b>RC6067*</b>	File flat 10 x 3 mm

\* only useable with adapter 8951011531



For model	Part# 8951011533
<b>RC6900</b> <b>RC6067*</b>	File round Length: 115 mm ø: 6 mm

\* only useable with adapter 8951011531



For model	Part# 8951011534
<b>RC6900</b> <b>RC6067*</b>	File half-rounded 10 x 3,8 mm Length: 115 mm ø: 6 mm

\* only useable with adapter 8951011531



For model	Part# 8951011535
<b>RC6900</b> <b>RC6067*</b>	File triangular 7 x 7 mm Length: 115 mm ø: 6 mm

\* only useable with adapter 8951011531



**RC6718Xi**

## 07| Riveting

### | Riveters

- For aluminium & copper
- For steel
- For stainless steel

01

02

03

04

05

06

**07**

08

09

10

11

12

13

14

15

16

17


18

19

20



# RIVETERS



**Model** Part#  
**RC6700** 8951074001

Model		RC6700
Blind rivet		2.4 - 5.0 mm
Mouthpiece Rivet pin		1.8 / 2.2 / 2.8 / 3.3 mm
Force	<b>F</b>	12000 N
Weight		1.6 kg
Hose		8 mm
Dimensions axbxc		225x280x100 mm
Air cons.		1.2 l/min
Air inlet		1/4" IG
Sound LpA		86.5 dB(A)
Vibration		3.5 m/s <sup>2</sup>

**Model** Part#  
**RC6710** 8951074002

Model		RC6710
Blind rivet		2.4 - 6.4 mm
Mouthpiece Rivet pin		1.9 / 2.4 / 2.9 / 3.4 / 4.0 / 4.4 mm
Force	<b>F</b>	19000 N
Weight		2.1 kg
Hose		8 mm
Dimensions axbxc		255x325x110 mm
Air cons.		1.8 l/min
Air inlet		1/4" IG
Sound LpA		64.1 dB(A)
Vibration		4.3 m/s <sup>2</sup>

**Model** Part#  
**RC6715** 8951074003

Model		RC6715
Blind rivet		3.2 - 6.4 mm
Mouthpiece Rivet pin		2.1 / 2.8 / 3.2 / 4.5 mm
Force	<b>F</b>	15000 N
Weight		1.8 kg
Hose		8 mm
Dimensions axbxc		300x300x100 mm
Air cons.		1.1 l/min
Air inlet		1/4" IG
Sound LpA		77.3 dB(A)
Vibration		2.4 m/s <sup>2</sup>

Up to 5 mm standard (alu/copper)



- Handy blind riveter with collection container for torn-off rivet pins
- Durable air-hydraulic force multiplying system
- Hanger for use with balancers with 4 different sizes of mouthpieces
- Only useable for copper, aluminium or softer material

Up to 6,4 mm standard (alu/copper)



- Handy blind riveter with collection container for torn-off rivet pins
- Durable air-hydraulic force multiplying system
- Hanger for use with balancers
- With 6 different sizes of mouthpieces
- Only useable for copper, aluminium or softer material

Up to 6,4 mm standard (alu/copper)



- Robust riveter with big collection container for torn-off rivet pins
- Ergonomic rubber coated handle
- Hanger for use with balancers
- Durable air-hydraulic force multiplying system
- With 4 different sizes of mouthpieces
- Useable for copper, aluminium & steel
- Not suited for stainless steel

### Balancer










**Model** Part#  
**RC9313** 8951011262












- Capacity 2 to 3 kg
- Stroke 1600 mm

**Model** Part#  
**RC6718Xi** 8951074008

**Model** Part#  
**RC6720** 8951074004

Model		RC6718Xi
Blind rivet		4.0 - 6.4 mm
Mouthpiece Rivet pin		2.5 / 3.2 / 4.1 / 4.2 mm „BOLT“
Force	<b>F</b>	15200 N
Weight		1.9 kg
Hose		8 mm
Dimensions axbxc		310x316x136 mm
Air cons.		4.3 l/min
Air inlet		1/4" IG
Sound LpA		76.2 dB(A)
Vibration		2.2 m/s <sup>2</sup>

Model		RC6720
Blind rivet		4.8 - 6.4 mm (Inox) 4.8 - 8.0 mm (Steel) 6.4 mm "BULB" (Steel) 6.4 mm "BOLT" (Steel)
Mouthpiece Rivet pin		3.2 / 4.3 / 5.1 mm 4.2 mm for „BOLT“
Force	<b>F</b>	12000 N
Weight		2.6 kg
Hose		8 mm
Dimensions axbxc		225x280x100 mm
Air cons.		2 l/min
Air inlet		1/4" IG
Sound LpA		66.2 dB(A)
Vibration		3.5 m/s <sup>2</sup>

Suction up to 6,4 mm (steel)



- High quality riveter with rivet pin removal by suction (can be switched off)
- Transparent container
- Two-finger trigger for easier operation and ON/OFF-switch
- Cold insulated handle
- Hanger for use with balancers
- Useable for copper, aluminium & steel
- Not suited for stainless steel

For BULB & BOLT rivets



- High quality riveter with rivet pin removal by suction (can be switched off)
- Transparent container
- Hanger for use with balancers
- Useable for copper, aluminium, steel & stainless steel
- Also useable with high tension Bulb & Bolt rivets

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20



RC7702V6

## 08| Grinding & sanding

### | Grinder

- Die & angle die grinders
- Erasers
- Tyre buffer
- Pistol & angle grinders
- MBX-removal system

### | Sanders

- Belt sanders
- Orbital sanders

### | Accessories

- Collets
- Abrasives
- Eraser wheels
- MBX brushes
- Backing pads
- Cutting discs

01

02

03

04

05

06

07

**08**

09

10

11

12

13

14

15

16


17

18

19

20

# DIE GRINDER < 400 W

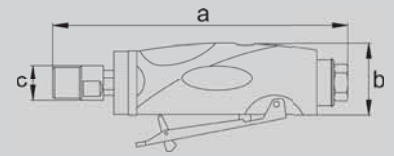

**Model** RC7051  
**Part#** 8951000165

**Model** RC7009  
**Part#** 8951000274

**Model** RC7058  
**Part#** 8951000278

Model	RC7051
Collet	3 mm
Power	40 W
Speed	60000 rpm
Weight	0.2 kg
Hose	8 mm
Dimensions axbxc	190x145x50 mm
Air cons.	96 l/min
Air cons.	192 l/min
Air inlet	1/4" IG
Sound LpA	71 dB(A)
Vibration	< 2,5 m/s <sup>2</sup>
<b>40 Watt - 60000 rpm</b>	

Model	RC7009
Collet	6 mm
Power	300 W
Speed	30000 rpm
Weight	0.37 kg
Hose	8 mm
Dimensions axbxc	190x145x50 mm
Air cons.	144 l/min
Air cons.	564 l/min
Air inlet	1/4" IG
Sound LpA	85.7 dB(A)
Vibration	3.33 m/s <sup>2</sup>
<b>300 Watt - 30000 rpm</b>	

Model	RC7058
Collet	6 mm
Power	700 W
Speed	23500 rpm
Weight	0.82 kg
Hose	8 mm
Dimensions axbxc	190x145x50 mm
Air cons.	288 l/min
Air cons.	1146 l/min
Air inlet	1/4" IG
Sound LpA	92.7 dB(A)
Vibration	1.82 m/s <sup>2</sup>
<b>700 Watt - 23500 rpm</b>	



- 3 mm lightweight die grinder
- 60000 rpm with rear exhaust
- 1/8" collet included



- High speed motor (30 000 RPM)
- Metal housing with composite painting for great grip
- Rear exhaust
- Safety trigger



- 700W power
- Composite housing with ergonomic trigger for perfect handling
- Rear exhaust
- Long spindle for easy access to workspace

## Engravers Tune up Kit

Model	Part#
RC7051	8950280060



# For bodyshop professionals




**Spindel lock**

**400W with low speed and low vibration**



**Compatible with large range of accessories**


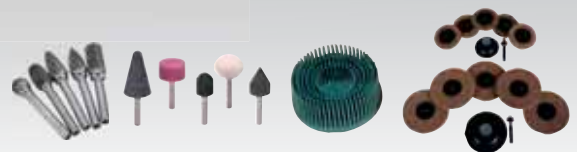











**RC7128**

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

**Model**  
RC7028

**Part#**  
8951000275

Model	RC7028	
Collet		6 mm
Power		400 W
Speed		27000 rpm
Weight		0.72 kg
Hose		8 mm
Dimensions axbxc		190x145x50 mm
Air cons.		228 l/min
Air cons.		900 l/min
Air inlet		1/4" IG
Sound LpA		85.2 dB(A)
Vibration		2.38 m/s <sup>2</sup>
<b>400 Watt - 27000 rpm</b>		














- Perfect for burrs and mounted points
- Straight universal 400W die grinder
- One hand spindle lock
- High torque motor
- "Beast" design rubber handle



**Model**  
RC7048

**Part#**  
8951000276












Model	RC7048	
Collet		6 mm
Power		400 W
Speed		27000 rpm
Weight		0.8 kg
Hose		8 mm
Dimensions axbxc		190x145x50 mm
Air cons.		228 l/min
Air cons.		900 l/min
Air inlet		1/4" IG
Sound LpA		85.7 dB(A)
Vibration		3.78 m/s <sup>2</sup>
<b>400 Watt - 27000 rpm</b>		



- For tight workspace
- Extended 400W die grinder
- One hand spindle lock
- High torque motor
- "Beast" design rubber handle

**Model**  
RC7128

**Part#**  
8951000277

Model	RC7128	
Collet		6 mm
Power		400 W
Speed		23000 rpm
Weight		0.76 kg
Hose		8 mm
Dimensions axbxc		190x145x50 mm
Air cons.		228 l/min
Air cons.		900 l/min
Air inlet		1/4" IG
Sound LpA		84.8 dB(A)
Vibration		4.05 m/s <sup>2</sup>
<b>400 Watt - 23000 rpm</b>		



- Ideal for backing pads and cleaning applications
- 400W angle die grinder
- One hand spindle lock
- High torque motor
- "Beast" design rubber handle





- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

# Strong power and spindle lock

**400W**  
**27 000 RPM**  
Power regulation

Less fatigue and precise  
work with vibration below  
 $2,5 \text{ m.s}^{-2}$



Fast and secure  
spindle lock system  
made of metal ring




Designed for safety  
and ergonomics

**RC7028**  
**RC7048**



## DIE GRINDER ERASER

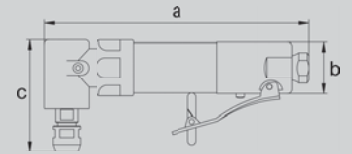

**Model** RC7068  
**Part#** 8951000329

Model	RC7068
Collet	6 mm
Power	400 W
Speed	2800 rpm
Weight	0.95 kg
Hose	8 mm
Dimensions axbxc	217x72x43 mm
Air cons.	228 l/min
Air cons.	900 l/min
Air inlet	1/4" IG
Sound LpA	96.1 dB(A)
Vibration	4.05 m/s <sup>2</sup>
<b>400 Watt - 2800 rpm</b>	



- Low speed die grinder providing huge working torque
- 2800 RPM with speed regulator
- "Beast" design rubber handle
- Rear exhaust
- Safety trigger

**Model** RC7684  
**Part#** 8951000115

Model	RC7684
Collet	6 mm
Power	250 W
Speed	20000 rpm
Weight	0.52 kg
Hose	8 mm
Dimensions axbxc	120x125x42 mm
Air cons.	350 l/min
Air cons.	470 l/min
Air inlet	1/4" IG
Sound LpA	80.1 dB(A)
Vibration	4.02 m/s <sup>2</sup>
<b>250 Watt - 20000 rpm</b>	



- Pistol grinder with good power transmission (no angle gear)
- With silencing exhaust hose system, for extra reduced noise and no disturbing exhausted air
- 3 mm collet as extra accessory available

**Model** Part#  
**RC7684RE** 8951000118

Pistol grinder with exhaust hose DUS35

**Model** Part#  
**RC7686RE** 8951000119

Pistol Die Grinder Set with:

- 6 mm collets pistol die grinder model RC7684RE with silencing exhaust hose system model DUS35
- Backing pads 50 mm and 75 mm with Roll-On quick assembly system
- 5 abrasive felt 50 mm
- 5 abrasive felt 75 mm
- 3 "Bristle" disk (K50/K80/K120)
- 1 oil bottle
- 1 tool box




**Model** RC7038  
**Part#** 8951000328

Model	RC7038
Spindle Size	3/8"-24 male 5/16" female
Power	400 W
Speed	2800 rpm
Weight	0.92 kg
Hose	8 mm
Dimensions axbxc	210x72x43 mm
Air cons.	500 l/min
Air cons.	918 l/min
Air inlet	1/4" IG
Sound LpA	86 dB(A)
Vibration	4.5 m/s <sup>2</sup>
<b>Erasing of adhesives and vinyl</b>	



- Efficient tool for renovation of painted surfaces with a slim eraser wheel
- No danger for the painted surface – please follow the instruction manual strictly (clean and dust-free, do not press)
- Low speed erasing due to the powerful planetary gear avoids heating up
- Good grip due to integrated rubber patches
- Lever sinks plainly into the housing



## Collet



Shaft Part# 8951011483  
3 mm for model: RC7051

Shaft Part# 8951011460  
3 mm for model: RC7009, RC7028, RC7048, RC7128, RC7058, RC7684

Shaft Part# 8951011477  
1/8" for model: RC7009, RC7028, RC7048, RC7128, RC7058, RC7684

Shaft Part# C139289  
6 mm for model: RC7009, RC7028, RC7048, RC7128, RC7058, RC7684

Shaft Part# C138727  
1/4" for model: RC7009, RC7028, RC7048, RC7128, RC7058, RC7684

Shaft Part# 8940174848  
8 mm for model: RC7009, RC7028, RC7048, RC7128, RC7058, RC7684

## Carborundum grinding points



Shaft Part# 8951011574  
6 mm Content 5 pcs.

## Roloc® bristle discs



Grain Part# 8951011633  
K50 Diameter: 50 mm (2")  
Quantity: 5 pcs.  
Color: green

Grain Part# 8951011635  
K80 Diameter: 50 mm (2")  
Quantity: 5 pcs.  
Color: yellow

Grain Part# 8951011634  
K120 Diameter: 50 mm (2")  
Quantity: 5 pcs.  
Color: white

## Roloc® backing pad



Shaft Part# 8951011629  
6 mm Diameter: 15 mm (1/2") 1-piece

Shaft Part# 8951011631  
6 mm Diameter: 50 mm (2") 2-piece

Shaft Part# CA158102  
1/4"-20 UNC IG Diameter: 75 mm (3") 1-piece for 7681K

## Roloc® abrasive felt




Model Part# 8951011557  
Roloc, siafix Diameter: 50 mm (2")  
Quantity: 5 pcs.

Model Part# 8951011558  
Roloc, siafix Diameter: 75 mm (3")  
Quantity: 5 pcs.

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20

# RODCRAFT MBX-REMOVAL SYSTEM

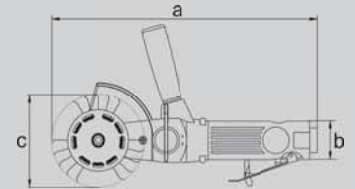

**Model** RC7091  
**Part#** 8951176010

Model		RC7091
Power		420 W
Speed		3500 rpm
Weight		1.1 kg
Hose		8 mm
Dimensions axbxc		275x95x40 mm
Air cons.		110 l/min
Air cons.		670 l/min
Air inlet		1/4" IG
Sound LpA		83.2 dB(A)
Vibration		< 2,5 m/s <sup>2</sup>

## MBX Automotive Set



### RODCRAFT MBX

A patented system with tool and accessory program. With and without sand blasting effect (without sand) for removing rust, under body coating, paint, sealants and various types of stickers, decals, trim lines or vinyl adhesives.

#### Set RC7091 consists of:

- 1 machine
- 1 adapter wheel 11 mm 8951011648
- 1 adapter wheel 23 mm 8951011647
- 1 brush belt black 11 mm 8951011664\*
- 1 brush belt black 23 mm 8951011663\*
- 1 brush belt ocre 11 mm 8951011666\*
- 1 brush belt green 11 mm 8951011668\*
- 1 eraser wheel 23 mm 8951011652

\* when reordered only available with content of 5 pcs.



- Model (Part#)
- ZU002** (8951011650)  
work place rack  
accessories not included
- ZU003** (8951011651)  
stone for resharpening,  
for all angled MBX brush belts

## ERASING



**Cold removing:**  
vynils, decals, trims, stickers without damaging the paint surface - no heating up!



### Width 23 mm

- Model (Part#)
- ZU014** (8951011649) content 5 pcs.
- ZU010** (8951011652) content 1 pcs.



### Eraser wheel

Removal of vinyl, glue, stickers, decals, trim lines, double sided adhesive tape from painted sheet metal, fibreglass, glass, wood, aluminium.

Not good for use on polyethylene, polypropylene, acryl, plexiglass. The manufacturer cannot be held liable for use on any of these materials - if in doubt test on specimen area first.

## SPECIAL FINE



**Removing:**  
paint and corrosion. For working on aluminium car bodies and non-ferrous metal parts. With and without sand blasting effect!



### Width 23 mm

- Model (Part#)
- BU018-5** (8951011671) content 5 pcs.  
straight Ø 0,5 mm stainless steel

- BU019-5** (8951011669) content 5 pcs.  
angled, sand blast effect  
Ø 0,5 mm stainless steel

### Width 11 mm


(Especially for difficult to reach spots, like 90° angles)

- Model (Part#)
- BU031-5** (8951011672) content 5 pcs.  
straight Ø 0,5 mm stainless steel

- BU030-5** (8951011670) content 5 pcs.  
angled, sand blast effect  
Ø 0,5 mm stainless steel


#### Straight version:

Stripping paint and corrosion from aluminium parts (car, truck or bus body). Very versatile and selective the brush belt does not remove structures like rivet heads, screws etc. and can be used easily on contours. With or without sand blasting effect.



#### Angled version:

Stripping paint and corrosion from aluminium parts (car, truck or bus body). Very versatile and selective the brush belt does not remove structures like rivet heads, screws etc. and can be used easily on contours. With or without sand blasting effect.



Made in Germany





FINE

**Removing:**  
paint, coatings (eg sealants) and rust without sand blasting effect!



**Width 23 mm**  
Model (Part#)

**BU017-5 (8951011667)** content 5 pcs.  
straight, hardened tip  
Ø 0,5 mm spring steel

**Width 11 mm**

(Especially for difficult to reach spots, like 90° angles)  
Model (Part#)

**BU028-5 (8951011668)** content 5 pcs.  
straight, hardened tip  
Ø 0,5 mm spring steel

Rust removal and cleaning, taking gaskets away from casted iron but not suited for aluminium sheet metal or casted aluminium! Without sand blasting effect. 11 mm version strips paint even in contoured areas, in corners and removes protective coatings from sheet metals before welding them e.g. into the car body.



MEDIUM

**Removing:**  
rust and oxides with fine sand blasting effect. Works also in corners and confined areas.



**Width 23 mm**  
Model (Part#)

**BU022-5 (8951011665)** content 5 pcs.  
angled, sharpened, hardened  
sand blasting effect  
Ø 0,5 mm spring steel  
lifetime can be extended by resharpening

**Width 11 mm**

(Especially for difficult to reach spots, like 90° angles)  
Model (Part#)


**BU021-5 (8951011666)** content 5 pcs.  
angled, sharpened, hardened  
sand blasting effect  
Ø 0,5 mm spring steel  
lifetime can be extended by resharpening

High efficiency rust removal brush belts, cleaning even porous surfaces and on difficult to reach spots, like 90° corners.



COARSE

**Removing:**  
under body coating, sealants as well as thick paint. With very coarse sand blasting effect!

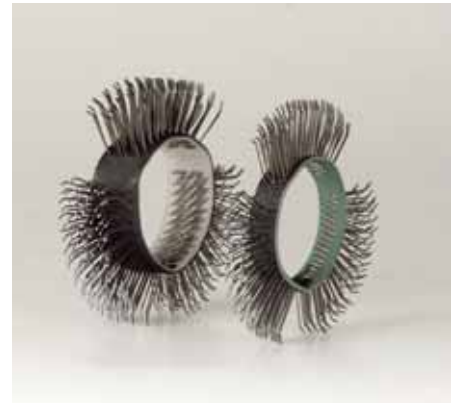

**Width 23 mm**  
Model (Part#)

**BU015-5 (8951011663)** content 5 pcs.  
angled, sharpened,  
hardened tip, sand blasting effect  
Ø 0,7 mm spring steel  
lifetime can be extended by resharpening

**Width 11 mm**

(Especially for difficult to reach spots, like 90° angles)  
Model (Part#)

**BU020-5 (8951011664)** content 5 pcs.  
angled, sharpened,  
hardened tip, sand blasting effect  
Ø 0,7 mm spring steel  
lifetime can be extended by resharpening


Removal of under body coatings and sealants, stripping paint. Very well suited for welding seam areas, contours and corners - with sand blasting effect.



01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20

<b>Model</b>	<b>Part#</b>	
<b>RC7072RE</b>	<b>8951075270</b>	19000 rpm
<b>RC7077RE</b>	<b>8951075310</b>	3400 rpm

<b>Model</b>	<b>Part#</b>
<b>RC7075RE</b>	<b>8951075290</b>

Model	RC7072RE	RC7077RE
Collet	 10 mm	10 mm
Power	 400 W	400 W
Speed	 19000 rpm	3400 rpm
Weight	 0.65 kg	0.8 kg
Hose	 8 mm	8 mm
Dim. axbxc	 232x43x35 mm	232x40x44 mm
Air cons.	 410 l/min	410 l/min
Air cons.	 520 l/min	520 l/min
Air inlet	 1/4" IG	1/4" IG
Sound LpA	 74.8 dB(A)	74 dB(A)
Vibration	 3.04 m/s <sup>2</sup>	5.32 m/s <sup>2</sup>

Tyre buffering with 10 mm quick chuck








- Easy to control handle form
- Slow running powerful planetary gear
- "RE" models are equipped with a silencing
- Exhaust hose system that takes away the
- Cold air - also avoids rubber dust being
- Distributed, no lubricants from the compressed
- Air can get onto the cleanly buffed surface, that
- Should be ready for vulcanisation
- Equipped with 10 mm quick chuck

### Accessories for tyre buffer

10 mm quick chuck brand Röhms®  
Part# 8951011458



Model	RC7075RE
Collet	 11 mm
Power	 400 W
Speed	 3400 rpm
Weight	 0.8 kg
Hose	 8 mm
Dimensions axbxc	 340x40x32 mm
Air cons.	 410 l/min
Air cons.	 520 l/min
Air inlet	 1/4" IG
Sound LpA	 74.1 dB(A)
Vibration	 5.58 m/s <sup>2</sup>


Tyre buffering with 11 mm hex. quick chuck



- Easy to control handle form
- Slow running powerful planetary gear
- "RE" models are equipped with a silencing
- Exhaust hose system that takes away the cold air - also avoids rubber dust being distributed, no lubricants from the compressed air can get onto the cleanly stuffed surface, that should be ready for vulcanisation
- Version 7078RE for high radial forces (with extra heavy duty front bearing)
- Equipped with quick change chucks with threaded adapter 3/8"-24

11 mm hexagonal chuck part# 8951011463  
Automatically centering chuck/adaptor for extremely high power without slipping. Accessories and grinding wheels e.g. for tyre buffering can be quickly exchanged. Including an adaptor for the use of drill chucks 3/8"-24.





**Model** RC7681K  
**Part#** 8951000019

**Model** RC7150  
**Part#** 8951072021

**Model** RC7120  
**Part#** 8951072001

Model	RC7681K
Drive	1/4" - 20UNC AG
Disc	50 - 75 mm
Power	150 W
Speed	15000 rpm
Weight	0.4 kg
Hose	8 mm
Dimensions axbxc	120x125x42 mm
Air cons.	365 l/min
Air cons.	490 l/min
Air inlet	1/4" BSP IG
Sound LpA	74.6 dB(A)
Vibration	5.9 m/s <sup>2</sup>

### Direct Drive - Composite



- For spot repairs - paint repairs limited to a small area, saving time and consumables
- Lightweight and handy tool with composite housing
- Speed regulator with thumb knob for one hand operation
- Air exhaust down motor housing

Set RC7681 consists of:

- 1 Pistol grinder
- 1 backing pad 50 mm (2") Roloc®
- 1 backing pad 75 mm (3") Roloc®
- 1 abrasive 50 mm (2") fine
- 1 abrasive 75 mm (3") fine
- 1 abrasive 50 mm (2") medium
- 1 abrasive 75 mm (3") medium
- 1 abrasive 50 mm (2") coarse
- 1 abrasive 75 mm (3") coarse
- 1 tool box

Model	RC7150
Drive	7/16" - 20AG
Disc x hole	75x22 mm, 105x22 mm, 115x22 mm
Power	500 W
Speed	18000 rpm
Weight	1.15 kg
Hose	8 mm
Dimensions axbxc	152x157x38 mm
Air cons.	410 l/min
Air cons.	570 l/min
Air inlet	1/4" BSP IG
Sound LpA	71 dB(A)
Vibration	3.2 m/s <sup>2</sup>

### For flexible fibre disc up to 115 mm



- Fast pistol sander with adjustable speed (and power) for fibre discs
- For safety reasons this tool cannot be used with hard cutting and grinding discs, please see our models 7160 - 7166 with speed governor

### Accessories for RC7150

	Model	Part#
Protective guard	7150-S	8951011538
Backing pad 75 x 22 mm	316-2	8951011544
Backing pad 105 x 22 mm	416-2	8951011545
Backing pad 125 x 22 mm	516-2	8951011548



Model	RC7120
Drive	5/8" AG
Disc	178 mm
Power	500 W
Speed	4500 rpm
Weight	2 kg
Hose	8 mm
Dimensions axbxc	320x38x100 mm
Air cons.	525 l/min
Air cons.	700 l/min
Air inlet	1/4" IG
Sound LpA	91.4 dB(A)
Vibration	2.7 m/s <sup>2</sup>

### For flexible fibre disc up to 178 mm




- With 5/8" thread and 178 mm backing pad
- Ergonomically optimised angle grinder with cold-insulated handle
- Silencer and rear exhaust
- Easy maintenance grease plug for fast regreasing of the angle gear
- Additional side handle can be mounted on both sides for both left and right handed persons

### Accessories for RC7120

Backing pad 170 mm x 5/8" IG *KF129587*



Velcro pad 150 mm x 5/8" IG *8951011554*



01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17


18

19

20



# ANGLE GRINDER

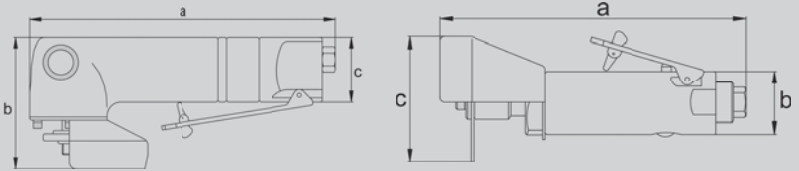

Model	Part#	
RC7160	8951075021	100x16 mm
RC7166	8951075051	115x22 - 125x22 mm

Model	Part#	
RC7171	8951000210	100x16mm
RC7172	8951000211	115x22mm
RC7173	8951000212	125x22mm

Model	Part#
RC7190	8951075101

Model	RC7160	RC7166
Drive	M10x1,5 AG	M14x2,0 AG
Disc x hole	100x16 mm	115x22 - 125x22 mm
Power	750 W	750 W
Speed	10000 rpm	10000 rpm
Weight	1.6 kg	1.6 kg
Hose	8 mm	8 mm
Dim. axbxc	232x93x47 mm	232x93x47 mm
Air cons.	490 l/min	490 l/min
Air cons.	650 l/min	650 l/min
Air inlet	1/4" IG	1/4" IG
Sound LpA	85.2 dB(A)	85.6 dB(A)
Vibration	4.56 m/s <sup>2</sup>	5.69 m/s <sup>2</sup>

For discs 100 to 125 mm



- Compact angle grinders
- With safety speed governor, protective guard and flanges
- Very versatile for many applications such as sanding with flap discs, grinding, cutting
- Available for 16 or 22 mm centre hole accessories or pads and brushes with thread M14x2
- Side handle for additional control can be taken off for confined areas

## Accessories for RC7160 - RC7166 - RC7172 - RC7173

CUTTING DISCS  
CONTENT 1 PIECE.



Model	Size	Part#	For
115TR	115 mm	8951011539	RC7166

Model	RC7171	RC7172	RC7173
Drive	M10	M10	M14
Disc x hole	100x16 mm	115x22 mm	125x22 mm
Power	700 W	700 W	
Speed	12000 rpm	12000 rpm	
Weight	1.4 kg	1.5 kg	1.5 kg
Hose	10 mm	10 mm	
Dim. axbxc	245x80x125 mm		
Air cons.	324 l/min	324 l/min	
Air cons.	540 l/min	540 l/min	
Air inlet	1/4" IG	1/4" IG	
Sound LpA	84 dB (A)	84 dB (A)	
Vibration	7,2 m/s <sup>2</sup>	9 m/s <sup>2</sup>	9,4 m/s <sup>2</sup>

For discs 100 to 125 mm



- 700 W
- 1000 hour service interval
- High quality bevel gears & Governed motor
- Rear exhaust (exhaust hose included)
- Streamline composite handle for either right or left handed operation
- Composite grip insulates operator's hand from cold
- Designed for a variety of applications such as sanding with flap discs, grinding and cutting

## Grinders Tune up Kit

Model	Part#
RC7171/72/73	8950280070



## Maximum power and optimal speed

Superior durability and performance are granted by the built-in high quality bevel gear with spiral teeth and the governed motor.

Model	RC7190
Drive	3/8"
Disc	70x10 mm
Power	350 W
Speed	20000 rpm
Weight	0.8 kg
Hose	8 mm
Dim. axbxc	195x80x40 mm
Air cons.	430 l/min
Air cons.	580 l/min
Air inlet	1/4" IG
Sound LpA	89.5 dB(A)
Vibration	3.53 m/s <sup>2</sup>

Mini cutting discs up to 70 mm



- Mini cutting grinder with steel guard and safety lever
- Rear exhaust
- Delivery includes 1 disc


## Accessories for RC7190

CUTTING DISCS  
CONTENT 1 PIECE



Model	Size	Part#	For
70TR	75 mm	8951011536	RC7190

# CUTTING GRINDER & BELT SANDER



**Model** RC7170  
**Part#** 8951000144

**Model** RC7155  
**Part#** 8951072041

**Model** RC7156  
**Part#** 8951072051

Model	RC7170
Drive	3/8"
Disc x hole	100x10 mm
Power	746 W
Speed	14000 rpm
Weight	1.8 kg
Hose	10 mm
Dim. axbxc	75x110x370 mm
Air cons. average	199 l/min
Air cons. cont.	216 l/min
Air inlet	1/4" IG
Sound LpA	86 dB(A)
Vibration	3 m/s <sup>2</sup>
<b>4" extended cutting grinder</b>	

Model	RC7155
Belt size	10x330 mm
Power	300 W
Speed	18000 rpm
Weight	0.8 kg
Hose	8 mm
Dim. axbxc	285x37x22 mm
Air cons. average	400 l/min
Air cons. cont.	520 l/min
Air inlet	1/4" BSP IG
Sound LpA	79.5 dB(A)
Vibration	2.5 m/s <sup>2</sup>
<b>10 mm belts</b>	

Model	RC7156
Belt size	20x520 mm
Power	370 W
Speed	17000 rpm
Weight	1.15 kg
Hose	8 mm
Dim. axbxc	353x44x35x22 mm
Air cons. average	400 l/min
Air cons. cont.	520 l/min
Air inlet	1/4" BSP IG
Sound LpA	83.2 dB(A)
Vibration	2.4 m/s <sup>2</sup>
<b>20 mm belts</b>	



- 4" = 100 mm for better reach and easy access to restricted areas
- Composite grip to reduce cold air transmission to operators
- Spindle lock system for easier wheel changing
- 11 position adjustable swivel guard – 126° adjustable for better operator protection & greater visibility of cutting operations
- Safety throttle lever to prevent accidental start up
- Supplied with 5 cutting wheels



- Small belt sander for confined areas
- Fast-tensioning mechanism allows exchanging of belts one-handed
- For ergonomic working handle can be adjusted in angle
- Delivery includes 3 belts (grid 80, 100 and 120)



- Tool can be used 100% into corners since the arm does not disturb on the side of the belt
- Fast-tensioning mechanism allows exchanging of belts one-handed
- Ergonomic working handle can be adjusted to different angles
- Continuous work is made more comfortable due to a broad resting plate for the second hand

## Accessories for RC7155

10 x 330 mm sanding belt, long



Package content 10 pcs.

10x330 mm grain 40	8951011604
10x330 mm grain 80	8951011570
10x330 mm grain 120	8951011577
10x330 mm grain 180	8951011578
10x330 mm grain 240	8951011579

## Accessories for RC7156

20 x 520 mm sanding belt, long



Package content 10 pcs.

20x520mm grain 80	8951011580
20x520mm grain 120	8951011581
20x520mm grain 180	8951011582
20x520mm Korn 240	8951011583

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20



**Model** Part#  
**RC7682** 8951000005  
**RC7682K** 8951000018

**Model** Part#  
**RC7661V** 8951072231

**Model** Part#  
**RC7200V** 8951072111

Model	RC7682
Disc ø & thread	50 mm (2") - 75 mm (3") AG
Orbit	5 mm
Speed	15000 rpm
Weight	0.5 kg
Hose	8 mm
Dimensions axbxc	260x165x37 mm
Air cons.	380 l/min
Air cons.	510 l/min
Air inlet	1/4" IG
Sound LpA	79.6 dB(A)
Vibration	8.9 m/s <sup>2</sup>
<b>Combi sander 5 mm stroke</b>	

Model	RC7661V
Disc ø & thread	77 mm - 5/16" AG
Orbit	2.5 mm
Speed	10000 rpm
Weight	1 kg
Hose	8 mm
Dimensions axbxc	260x165x37 mm
Air cons.	350 l/min
Air cons.	430 l/min
Air inlet	1/4" IG
Sound LpA	88 dB(A)
Vibration	3.5 m/s <sup>2</sup>
<b>Stroke 2.5 mm - Spot-Repair</b>	

Model	RC7200V
Disc ø & thread	150 mm - 5/16" AG
Orbit	5 mm
Speed	10000 rpm
Weight	1.95 kg
Hose	8 mm
Dimensions axbxc	260x165x37 mm
Air cons.	315 l/min
Air cons.	400 l/min
Air inlet	1/4" IG
Sound LpA	86.2 dB(A)
Vibration	8.3 m/s <sup>2</sup>
<b>Combi sander 5 mm stroke</b>	



- For spot repairs - paint repairs limited to small areas
- Ergonomic composite housing
- Speed regulator with thumb knob for one hand operation
- Air exhaust down motor housing
- 75 mm pad
- 5 mm stroke

**RC7682K** **8951000018**

Content:

- 1 pistol sander
- 1 velcro pad 50 mm (2")
- 1 velcro pad 75 mm (3")
- 10 abrasives 50 mm grain 600
- 10 abrasives 75 mm grain 600
- 10 abrasives 50 mm grain 320
- 10 abrasives 75 mm grain 320
- 10 abrasives 50 mm grain 180
- 10 abrasives 75 mm grain 180
- 1 tool box



- Spot-repair orbital sander with 2,5 mm stroke and small pad
- Ideal for dust enclosures, irregularities or on very rounded surfaces
- Comfortably rounded shape
- Insulating rubber cover and speed regulator
- Equipped with velcro pad



- Combi-tool for coarse sanding and finishing in one
- Can easily be switched from a rotating coarse sander to a random orbital sander with 5 mm stroke
- Equipped with 150 mm velcro pad

# Ergonomic, powerful, comfortable - all in one hand!

285 W motor with 5 vanes  
for efficient sanding even  
with large stroke and coarse grid

Elegantly designed  
composite lever

Knob for adjustment of the right  
speed for the application,  
easy to reach for usability with one hand


Sanders are delivered with  
two interchangeable suction  
ports with diameters 29  
and 27 mm for central dust  
extraction units

With high quality bearings  
and excellent dust protection  
for continuous sanding



15 hole - 150 mm diameter RODCRAFT  
micro-velcro pad good for all most used  
abrasive sheets (6 hole, 6+1 hole and 8+1 hole).

**RC7702V6**



Model	Part#	Orbit
RC7702V6	8951000021	2.5 mm
RC7705V6	8951000020	5 mm
RC7710V6	8951000070	10 mm

Model	Part#	Orbit
RC7705V6-2H	8951000081	5 mm
RC7710V6-2H	8951000082	10 mm

Model	Part#
RC7691V	8951072212

Model	RC7702V6	RC7705V6	RC7710V6
Disc ø & thread	150 mm - 5/16" AG		
Orbit	2.5 mm	5 mm	10 mm
Speed	10000 rpm		
Weight	0.825 kg	0.85 kg	0.945 kg
Hose	8 mm		
Dim. axbxc	206x107 mm		
Air cons. average	450 l/min		
Air cons. cont.	550 l/min		
Air inlet	1/4" IG		
Sound LpA	79.5 dB(A)	86.1 dB(A)	79.1 dB(A)
Vibration	3.8 m/s <sup>2</sup>	5.4 m/s <sup>2</sup>	9 m/s <sup>2</sup>


Ergonomic design - Velcro pad 150 mm



- 1 hand orbital sander with ergonomic design
- Innovative swivel for exhaust to allow left and right hand work
- Only 107 mm high
- Insulating thermo rubber against cold and for good grip
- Change speed regulator with one hand while working
- Delivered with two interchangeable suction ports with diameters 29 and 27 mm
- Equipped with 150 mm velcro pad with 15 holes

#### Accessories for RC77..

RC7702V6	2,5 mm stroke
RC7705V6	5,0 mm stroke
RC7710V6	10 mm stroke



8955000012

Model	RC7705V6-2H	RC7710V6-2H
Disc ø & thread	150 mm - 5/16" AG	
Orbit	5 mm	10 mm
Speed	10000 rpm	
Weight	1 kg	1.1 kg
Hose	8 mm	
Dim. axbxc	315x107 mm	
Air cons. average	450 l/min	
Air cons. cont.	550 l/min	
Air inlet	1/4" IG	
Sound LpA	83.5 dB(A)	
Vibration	5.1 m/s <sup>2</sup>	7.9 m/s <sup>2</sup>


Rear exhaust 5 & 10 mm orbit



- 2 hand orbital sander with ergonomic design
- Innovative swivel for exhaust to allow left and right hand work
- Only 107 mm high
- Insulating thermo rubber against cold and for good grip
- Change speed regulator with one hand while working
- Delivered with two interchangeable suction ports with diameters 29 and 27 mm
- Equipped with 150 mm velcro pad with 15 holes
- Rear exhaust
- 5 mm stroke

#### Accessories for RC77..-2H

RC7705V6-2H	5,0 mm stroke
RC7710V6-2H	10 mm stroke



8955000012

Model	RC7691V
Disc ø & thread	200 mm - 6xM4
Orbit	5 mm
Speed	10000 (900) rpm
Weight	2.1 kg
Hose	8 mm
Dimensions axbxc	300x120 mm
Air cons. average	340 l/min
Air cons. cont.	420 l/min
Air inlet	1/4" IG
Sound LpA	88.6 dB(A)
Vibration	2.8 m/s <sup>2</sup>

Composite 200 mm pad



- 200 mm two-hand sanders with powerful 8-vane motor
- Adjustable speed
- Composite material handle
- Motor housing insulated against the transfer of cold – for long sanding operations
- Equipped with a 29 mm suction port for use with central dust extraction
- Orbital sander + rotation: sander that simultaneously rotates the pad as well as moving it on an orbit (gears sanders) – typical for aggressive sanding applications
- Equipped with 200 mm velcro pad with 8 holes 8951012348
- Pad is fixed with 6 bolts


#### Accessories for RC7691



8951012348



# LINEAR SANDER ACCESSORIES



**Model**    **Part#**  
**RC7500**    **8951072101**

Model		RC7500
Pad		65 x 390 C
Stroke		linear 25 mm
Speed		3500 rpm
Weight		2.7 kg
Hose		8 mm
Dimensions axbxc		400x170 mm
Air cons.		200 l/min
Air cons.		250 l/min
Air inlet		1/4" IG
Sound LpA		80.1 dB(A)
Vibration		21.3 m/s <sup>2</sup>

## Combi sander 5 mm stroke




- Tool makes forward-reverse movements for profiling and sanding of surfaces with lots of filler (e.g. repairs of dented car doors)
- Equipped with a non-perforated long sanding pad and clamps for normal abrasives

## Non-perforated pads



øPad (mm)	Thread	Surface		Model	Part#
50	5/16" AG	Velcro	soft	JS2K	8951011561
50	5/16" AG	Velcro	medium		8955000007
75	5/16" AG	Velcro	soft	JS3WK	8951011560
75	5/16" AG	Velcro	medium		8955000006
150	5/16" AG	Velcro	soft	JS6WK	8951011566
150	5/8" IG	Velcro	soft	KT-150	8951011554

## Perforated pads

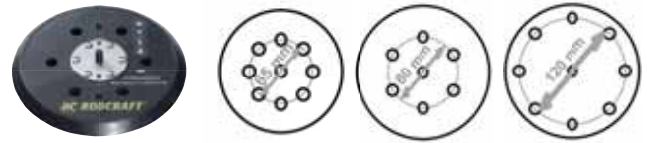

øPad (mm) Holes	Thread	Diam. circle of holes (mm)	Surface		Model	Part#
125 / 8	5/16" AG	65	Velcro	medium	EPA125M8V	8951011642
125 / 8	5/16" AG	65	Velcro	very soft	EPA125S8V	8951011643
150 / 6	5/16" AG	80	Velcro	soft	JS6GWK	8951011567
150 / 6	5/16" AG	80	Velcro	hard	JS6GHKF	8951011599
150 / 6+1	5/16" AG	80	Velcro	hard	EPA150H6V	8951011636
150 / 6+1	5/16" AG	80	Velcro	medium	EPA150M6V	8951011638
150 / 14+1	5/16" AG	80 / 120	Velcro	hard		8955000012
200 / 8	-	120	Velcro	very hard		8951012348*

\* only to be used with RC7691V

## Sanders Tune up Kit

Model	Part#
RC7682 SMART REP	8950280015
RC7682K	8950280015
RC7705V6	8950280041
RC7702V6	8950280041
RC7710V6	8950280041
RC7805V6	8950280041

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

**Model** Part#  
**7905** 8951000016

**Model** Part#  
**7910** 8951089014

Model	7905
Peak power/ Power	1400/1200 W
Tank	21 L
Suction flow	215 m³/h - 3583 l/min
Suction height (water)	2400 mm H <sub>2</sub> O
Electr. sockets	1x2000 W
Filter surface	2700 cm²
Dimensions	415x415x550 mm
Weight	10 kg
Air supply pressure	4 - 16 bar
Sound LpA	65 dB(A)

Model	7910
Peak power/ Power	2600/2300 W
Tank	77 L
Suction flow	430 m³/h - 7150 l/min
Suction height (water)	2400 mm H <sub>2</sub> O
Electr. sockets	2x600 W
Filter surface	5700 cm²
Dimensions	608x608x1060 mm
Weight	25,1 kg
Air supply pressure	4 - 15 bar
Sound LpA	67 dB(A)

## Accessories 7905 & 7910

**Model** Part#  
**7910VD** 8951011130



compressed air distributor with 2 air multi-profile couplers

**Model** Part#  
**7900/10SC** 8951011102



5 m suction hose 29 mm

**Model** Part#  
**205SE** 8951011111



5 m suction hose 29 mm with integrated air supply hose

- The dust extraction units comply with class "L" requirements for filters (according to EN 60335-2-69:1999-08)
- The air tools and electrical tools can be attached directly onto the energy supply from the vacuum station
- Automatic stop for vacuum (10 sec delay) after switching off all connected tools. The vacuum hose is emptied, avoiding clogs. Easy remote controlled start of the vacuum system from any connected tool as soon as one of them is started
- Equipped for wet and dry applications with integrated sensor

- Compact version with 21L tank
- 1 motor by-pass cooled
- 1 electrical socket
- 1 suction hose model 7900/10SC
- With nylon bag and class L fleece filter

- 77 L tank
- 2 motors two-step (operation with one motor possible to save energy) – by-pass cooled
- 2 electrical sockets and diverter for 2 suction hoses with nylon bag and class L fleece filter
- Basket for accessories or sander
- Practical joint to tilt the tank for fast and easy emptying
- Sufficient vacuum to work with 2 sanders
- Simultaneously - possible to operate 2 air tools with compressed air when using an additional air diverter model 7910VD (part# 8951011130)





**Accessories for 7905**

Model	Part#
<b>7900SF</b>	<b>8951011100</b>
<i>Included in delivery</i>	
	
standard filter (polyestervleece class L – 5700 cm <sup>2</sup> )	

Model	Part#
<b>7900PB</b>	<b>8951011098</b>
	
dust bags made of filter paper (5 pcs.)	

Model	Part#
<b>7900SBP</b>	<b>8951011103</b>
	
dust bags made of polyester (5 pcs.)	

**Accessories for 7910**

Model	Part#
<b>7910SF</b>	<b>8951011101</b>
<i>Included in delivery</i>	
	
standard filter (polyestervleece class L – 5700 cm <sup>2</sup> )	

Model	Part#
<b>7910PB</b>	<b>8951011099</b>
	
dust bags made of filter paper (5 pcs.)	

Model	Part#
<b>7910SBP</b>	<b>8951011104</b>
	
dust bags made of polyester (5 pcs.)	

Model	Part#
<b>7900/10K</b>	<b>8951011131</b>
	
click-connector (dust extraction unit - hose)	

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08**
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



**RC7683**

## 09| Polishing

### | Polishers

- Pistol polisher
- Angle polisher

### | Accessories

- Discs
- Sponges
- Woolpads

01

02

03

04

05

06

07

08

**09**

10

11

12

13

14

15

16


17

18

19

20







# POLISHERS ACCESSORIES



**Model** Part#  
**RC7683K** 8951000017  
**RC7683** 8951000004

**Model** Part#  
**RC7130** 8951072004

## Polishing system

Model		RC7683K / RC7683
Drive		5/16"-24UNF IG
Disc		75 mm
Power		150 W
Speed		5500 mm
Weight		0.6 kg
Hose		8 mm
Dimensions axbxc		120x125x42 mm
Air cons.		360 l/min
Air cons.		480 l/min
Air inlet		1/4" BSP IG
Sound LpA		78.5 dB(A)
Vibration		3.8 m/s <sup>2</sup>

### Direct Drive - Composite



- For spot repairs - paint repairs limited to a small area, saving time and consumables
- Lightweight and handy tool with composite housing
- Speed regulator with thumb knob for one hand operation
- Air exhaust down motor housing

Set RC7683K consists of:

- 1 pistol polisher
- 1 velcro pad 75 mm (3")
- 1 soft sponge white 75 mm (3")
- 1 sponge yellow 75 mm (3")
- 1 wool pad 75 mm (3")



### Polishers Tune up Kit

Model	Part#
RC7683 SMART REP	8950280016
RC7683K	8950280016

Model		RC7130
Drive		5/8" AG
Disc		178 mm
Power		500 W
Speed		2500 rpm
Weight		2 kg
Hose		8 mm
Dimensions axbxc		320x38x100 mm
Air cons.		525 l/min
Air cons.		700 l/min
Air inlet		1/4" IG
Sound LpA		87.9 dB(A)
Vibration		6.9 m/s <sup>2</sup>

### Flat head pad 178 mm



- 170 mm (7") heavy duty angle polisher with 5/8" spindle and low head height including
- A fully rounded polishing pad diameter 170 mm (7")
- A lamb wool polishing bonnet (to tie with strap)
- Insulated main handle and soft grip side handle
- Rear exhaust
- Aluminum alloy housing, sturdy but lightweight tool
- Quality spiral bevel gearing and grease plug screw for the angle

### 75 mm velcro 5/16"



Disc  
Part#: 8951011560



Felt  
Part#: 8951011556

### 150 mm velcro 5/8"



Disc  
Part#: 8951011554




wool (velcro)  
Part#: 8951011586

### 150-170 mm to tie 5/8"



160 mm

Hard sponge disc  
Part#: 8951011551



170 mm

Disc (rounded)  
Part#: 8951011549



Wool (to tie)  
Part#: 8951011550

# Complete pack for headlights RC7210 Kit Part#8951000296




**Sanding:**  
1 RC7682 with 60 sanding papers



**High quality case**  
with removable foam  
compatible with tool  
drawer



**Polishing:**  
1 RC7683 with hard  
and soft sponge and  
polish cream



**Recharge pack (8940174744)**  
20 headlights renew with  
1 recharge pack of accessories



Perfect finish in 10 mn



**RC7210**

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20



RC6605

## 10| Car glass removal

### | Glass removal tools

- Oscillating cutter
- Manual glass removal tool
- Single suction cup
- Suction cup set

### | Accessories

- Blades

01

02

03

04

05

06

07

08

09

**10**

11

12

13

14

15

16

17


18

19

20



# CAR GLASS REMOVAL TOOLS SUCTION CUPS



**Model** RC6605RE  
**Part#** 8951074005

Model	RC6605RE	
Head Interface		2 x hex s = 19 e = 21.9 mm
Blade Interface		e=22 mm
Oscillations		20000 min <sup>-1</sup>
Weight		0.8 kg
Hose		8 mm
Dimension axbxc		180x40x67 mm
Air cons.		370 l/min
Air cons.		530 l/min
Air inlet		1/4" IG
Sound LpA		79.8 dB(A)
Vibration		5.37 m/s <sup>2</sup>
<b>Oscillating movement 20.000 / min.</b>		



- Versatile cutter, scraper and saw called "UNICUTTER"
- Well suited for removal of windscreens and other glued parts
- A silencing exhaust hose system is included in the delivery

**Model** RC6606RE  
**Part#** 8951174000



Oscillating Cutter (UNICUTTER) Set in tool box including:

- 1 cutter model RC6605RE with silencing exhaust hose system
- 1 blade model U24
- 1 blade model U36
- and keys

\* for reordering only available with content 2 pcs

**Model** RC6610  
**Part#** 8951074000

Model	RC6610	
Head Interface		2 x hex s = 19 e = 21.9 mm
Blade Interface		e=22 mm
Oscillations		20000 min <sup>-1</sup>
Weight		1.3 kg
Hose		8 mm
Dimension axbxc		180x40x67 mm
Air cons.		500 l/min
Air cons.		800 l/min
Air inlet		1/4" IG
Sound LpA		86.9 dB(A)
Vibration		5.38 m/s <sup>2</sup>
<b>Oscillating movement 20.000 / min.</b>		



- Large version of model 6605, e.g. for truck and bus windscreens and other glued car glass (without silencing exhaust hose system)



**Model** Part#  
**AGS185** 8951089055

### Manual glass removal

- Autoglass kit with square wire for removal of windscreens and rear windows etc.
- Dimension of wire material 0,6 x 0,6 mm
- Includes an angled manual blade with extra pull handle on short cable
- Delivered with wire handles, punch, clip remover level and trim lifting claw

- **50 m wire AGD186** 8951011085



**Model** Part#  
**STS70k** 8951089056

### Suction cup max. 40 kg

- Single suction cup especially suited for working in confined areas
- Can be used on glass, boards, sheet metal





**Model** Part#  
**STS71K** 8951011087


### Suction cup max. 80 kg

- Two double suction cups for transport, assembly
- And disassembly of car windscreens, rear windows
- Self-adapting to the 3 dimensional shape of the glass
- Ratchet strap for fixation of the windscreen for additional safety.


5 m strap 8951011088  
Spare rubber 8951011090

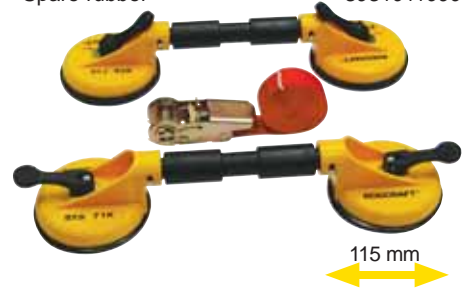


**Model** **U27**  
Part Number 8956001320  
Cutting Edge length 24 mm

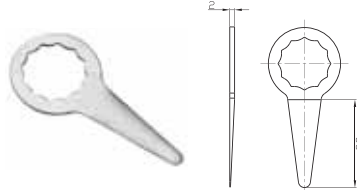


**Model** **G36**  
Part Number 8956001323  
Cutting Edge length 35 mm

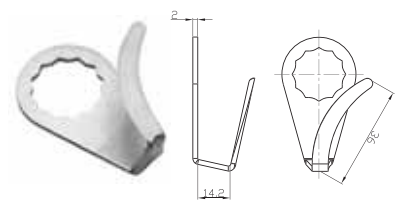


**Model** **U37**  
Part Number 8956001328  
Cutting Edge length 36 mm




**Model** **G58**  
Part Number 8956001322  
Cutting Edge length 53,5 mm

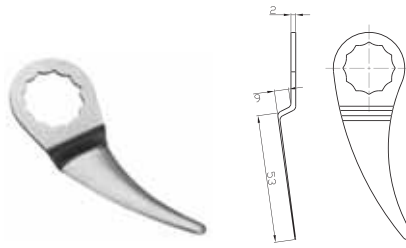


**Model** **K28**  
Part Number 8956001326  
Cutting Edge length 53 mm

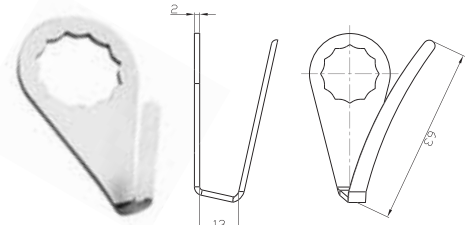

**Model** **U64**  
Part Number 8956001324  
Cutting Edge length 63 mm



**Model** **G95**  
Part Number 8956001321  
Cutting Edge length 90 mm

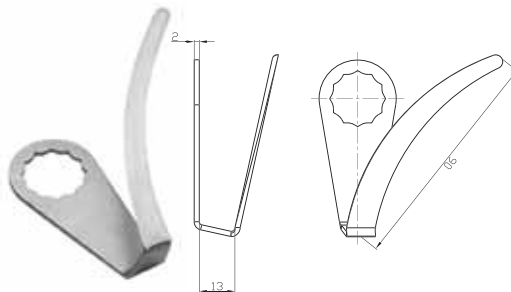

**Model** **U95**  
Part Number 8956001325  
Cutting Edge length 90 mm



**Model** **UG-SET**  
Part Number 8956001327  
Set of 7 blades for all applications, contains: U95, U64, U37, U27, G36, G58, G95



RC8106

## 11| Painting

### | Paint guns

- Paints guns 0,125 l cup
- Paints guns 0,6 l cup
- HVLP paint guns

### | Accessories

- Nozzle Sets

01

02

03

04

05

06

07

08

09

10

**11**

12

13

14

15


16

17












18

19

20



**Model** Part#  
RC8103-08 8951070012

Model	RC8103-08	
Cup		0.125 Litre
Nozzle		0.8 mm
Max. Pressure		2 bar
Weight		0.45 kg
Hose		8 mm
Dimensions axbxc		128x240 mm
Air cons.		100 l/min
Air cons.		140 l/min
Air inlet		1/4" AG
Sound LpA		<70 dB(A)
Vibration		< 2.5 m/s <sup>2</sup>

#### Pico-Speed - Mini paint gun



- 0,125 L plastic cup
- Equipped with nozzle 0,8 mm
- Adjustable spray pattern (round, wide, swivelling nozzle head)
- Screw to limit paint volume
- Precise dosage trigger
- Air flow valve












#### Accessories for RC8103



Part#

Nozzle set 0,5 mm	8951011708
Nozzle set 0,8 mm	8951011709
Nozzle set 1,0 mm	8951011710
Cup 0,125 l incl. lid	8951011711

**Model** Part#  
RC8102-14 8951070002

Model	RC8102-14	
Cup		0.6 Litre
Nozzle		1,4 HVLP mm
Max. Pressure		2 - 4 bar
Weight		0.75 kg
Hose		8 mm
Dimensions axbxc		180x340 mm
Air cons.		260 l/min
Air cons.		370 l/min
Air inlet		1/4" AG
Sound LpA		<70 dB(A)
Vibration		< 2.5 m/s <sup>2</sup>

#### Rod-Speed 1,4 mm




- 0,6 L plastic cup
- Equipped with nozzle 1,4 mm
- Adjustable spray pattern (round, wide, swivelling nozzle head)
- Screw to limit paint volume
- Precise dosage trigger
- Air flow valve

Also available as:

<b>RC8102/17</b> with 1,7 mm nozzle	8951070032
<b>RC8102/20</b> with 2,0 mm nozzle	8951070042
<b>RC8102/25</b> with 2,5 mm nozzle	8951070052












#### Accessories for RC8102



Part#

Nozzle set 1,4 mm	8951011703
Nozzle set 1,7 mm	8951011704
Nozzle set 2,0 mm	8951011705
Nozzle set 2,5 mm	8951011706
Cup 0,6 l incl. lid	8951011695
Gasket kit	8951011707

**Model** Part#  
RC8106-13 8951070011

Model	RC8106-13	
Cup		0.6 Litre
Nozzle		1,3 HVLP mm
Max. Pressure		2 bar
Weight		0.75 kg
Hose		8 mm
Dimensions axbxc		180x369 mm
Air cons.		210 l/min
Air cons.		300 l/min
Air inlet		1/4" AG
Sound LpA		<70 dB(A)
Vibration		< 2.5 m/s <sup>2</sup>

#### Rod-Speed HVLP - fogless



- RC8102 with paint optimising system "HVLP"
- 0,6 L plastic cup
- Equipped with nozzle 1,3 mm
- Adjustable spray pattern (round, wide, Swivelling nozzle head)
- Screw to limit paint volume
- Precise dosage trigger
- Air flow valve
- Includes mini pressure regulator with gauge

Also available as:

<b>RC8106/20</b> with 2,0 mm nozzle	8951070041
-------------------------------------	------------












#### Accessories for RC8106



Part#

Nozzle set 1,3 mm:	8951011713
Nozzle set 1,7 mm:	8951011714
Nozzle set 2,0 mm:	8951011715
Cup 0,6 l incl. lid:	8951011695
Paint filter 1 piece	8951011707
Regulator with gauge	8951011716

Model Part#  
RC8107-14 8951070021

Model		RC8107-14
Cup		0.6 Litre
nozzle		1.4 mm HVLP
max. Pressure		3 bar
Weight		1 kg
Hose		8 mm
Dimensions axbxc		187x415 mm
Air cons.		150 l/min
Air cons.		380 l/min
Air inlet		1/4" AG
Sound LpA		<70 dB(A)
Vibration		< 2.5 m/s <sup>2</sup>

HVLP tilting cup




- RC8102 with paint optimising system "HVLP"
- 0,6 l plastic cup equipped with nozzle 1,4 mm
- Adjustable spray pattern (round, wide, swivelling nozzle head)
- Screw to limit paint volume
- Precise dosage trigger
- Air flow valve
- Includes mini pressure regulator with gauge
- For working overarm with swivel joint for tilting the cup

Accessories for RC8107



	Part#
Nozzle set 1,7 mm	8951011718
Nozzle set 2,0 mm	8951011719
Cup 0,6 l incl. lid	8951011720
Regulator with gauge	8951011716

# Painting made easy with various adjustments!

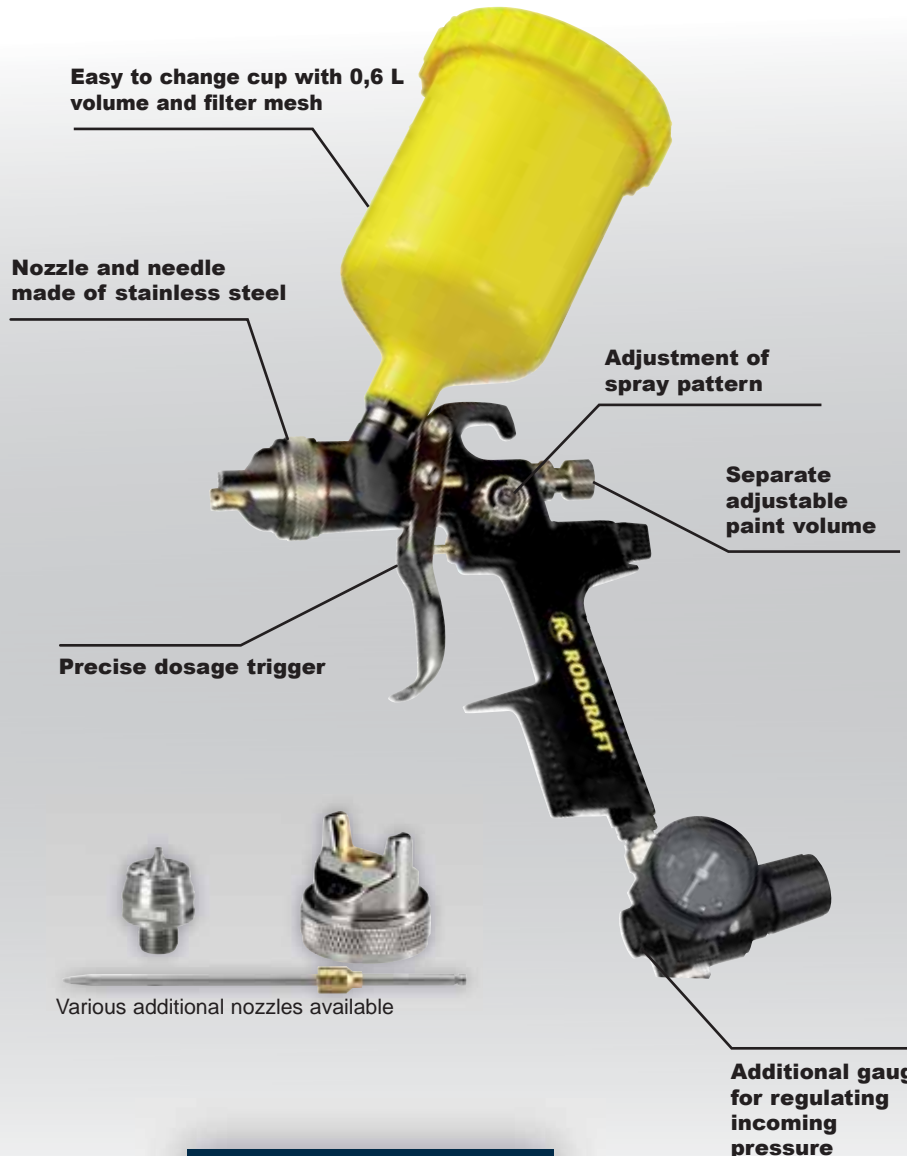

# RC8106

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20





RC8241



RFP04G



## **12| Miscellaneous**

- | Tyre inflators
- | Sand blasters
- | Vacuum gun
- | Blow guns
- | Underbody coating guns
- | Cleaning gun
- | Cartridge gun
- | Grease guns

01

02

03

04

05

06

07

08

09

10

11

**12**

13

14

15


16

17

18

19

20



**Model**  
RF02G

**Part#**  
8951011019

Model		RF02G
Max. pressure		10 bar
Weight		0.41 kg
Hose		8 mm
Dimensions axbxc		250 mm
Air cons.		100 l/min
Air cons.		300 l/min
Air inlet		1/4" IG
Nozzle		Tyre valve clip

**Model**  
RFP04G

**Part#**  
8951012306

Model		RFP04G
Max. pressure		15 bar
Weight		0.65 kg
Hose		8 mm
Dimensions axbxc		250x165x70 mm
Air cons.		160 l/min
Air cons.		800 l/min
Air inlet		1/4" IG
Nozzle		Tyre valve clip

**Model**  
RFP03DG

**Part#**  
8951011020

Model		RFP03DG
Max. pressure		15 bar
Weight		0.69 kg
Hose		8 mm
Dimensions axbxc		245 mm
Air cons.		100 l/min
Air cons.		375 l/min
Air inlet		1/4" IG
Nozzle		Tyre valve clip

### Certified tyre inflator with tyre valve clip



- Professional tyre filler with 500 mm hose and valve clip
- Pressure range 0 – 10 bar
- Certified version with analogue 60 mm gauge and anti-shock-rim
- Push-button for tyre pressure release and lever for tyre filling

### Certified tyre inflator with tyre valve clip



- Pressure range 1 – 11 bar
- Certified shock-resistant version
- Easy to read, large pressure gauge (diameter 80 mm - 10 graduations per bar)
- High filling rate and long 1,5 m hose for comfortable and safe filling even of large tyres
- Equipped with a hanger
- Easy to use broad metal lever for filling and button for pressure release – measuring continuously
- Can also be used for nitrogen

Filling hose 1,5 m

8951012296


### Digital



- Pressure range 0 – 12 bar
- Solid metal body
- 3-function-lever (measurement-filling-release)
- Full anti-shock rubber cover like RFG01G
- With electronic pressure sensor and digital display, very easy to read and surpassing the precision requirements of the European Union directive (0,01 bar)
- 3500 hours operation (mixed operation) with 2 x AAA batteries, with battery status indication and auto-start
- Not certifiable



# SAND BLASTERS VACUUM GUN



**Model** RC8113  
**Part#** 8951070023

**Model** RC8112  
**Part#** 8951070003

**Model** RC8116  
**Part#** 8951070004

Model	RC8113
Size of blasting material	0,4 - 0,8 mm
Volume appr.	1 L
Max. pressure	6 - 8 min <sup>-1</sup>
Weight	0.9 kg
Hose	8 mm
Dimensions axbxc	255X223 mm
Air cons. average	190 l/min
Air cons. cont.	330 l/min
Nozzle	6 mm
Air inlet	1/4" AG

**For small areas with vacuum & bag**



- Small sand blaster with recovery of the blasting material through self-induced suction and collection bag
- With 5 different sorts of nozzles for concave and convex corners, brush nozzle, spot blasting nozzle and nozzle for sand blasting of larger surfaces in stripes
- Includes a bottle of 0,8 kg copper slag blasting material

Model	RC8112
Size of blasting material	0,4 - 0,8 mm
Volume appr.	10 L
Max. pressure	6.7 min <sup>-1</sup>
Weight	2.35 kg
Hose	8 mm
Dimensions axbxc	157x150x250x500 mm
Air cons. average	170 l/min
Air cons. cont.	240 l/min
Nozzle	5 mm
Air inlet	1/4" AG

**Portable 10 L tank**



- Sand blaster for mobile use
- only with compressed air
- With portable blasting material container (10 l) and long hose (5 m) for connection of container and gun
- The blasting material has to have particle sizes 0,4 – 0,8 mm and it should be dry without clogs
- Note:
- The small hole on the fitting at the tank is always kept open for an optimum air suction flow

### Accessories for RC8112

	Part#
Ceramic nozzle (5 pcs.):	8951011689
Gun:	8951011690

Model	RC8116
Max. pressure	6 bar
Weight	0.6 kg
Hose	8 mm
Dimensions axbxc	250 mm
Air cons. average	330 l/min
Air cons. cont.	480 l/min
Air inlet	1/4" IG

**Vacuum System & blow gun in 1**




- Removes sharp parts (shards of glass)
- Vacuums even electrically conducting dust (metal dust) or pumps water over little differences in height (emptying cars)
- Blow gun for gentle air pressure but high flow e.g. for cooling, drying
- Metal body with 4 different nozzles, suction hose and dust bag made of textile

### Accessories for RC8116

	Part#
Nozzle set, (flat & round):	8951011684
Brush nozzle:	8951011688
Suction hose:	8951011683
Dust bag:	8951011686

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20

## BLOW GUNS



**Model** RC8120  
**Part#** 8951070014

**Model** RC8240  
**Part#** 8955000026

Model		RC8120
Max. pressure		2-15 bar
Weight		0.2 kg
Hose		8 mm
Dimensions axbxc		140x145 mm
Air cons.		130 l/min
Air cons.		190 l/min
Air inlet		1/4" IG
Nozzle		2 mm

In aluminium



- Short and handy aluminium version
- 2 mm nozzle


Model		RC8240
Weight		0.1 kg
Hose		8 mm
Dimensions axbxc		191x134 mm
Air cons.		290 l/min
Air cons.		432 l/min
Air inlet		1/4" IG
Sound Lpa		78.2 dB(A)
Nozzle		2 mm

Soft start valve



- Made of durable high quality materials, manufactured with precision
- High air flow even at low pressure
- Tough composite housing insulates against cold air
- With soft TPR-rubber area on the lever
- Ergonomic handle-lever for reduced stress to the user
- Very sturdy air inlet with threaded brass insert

# BLOW GUNS



**Model** Part#  
**RC8240S** 895500009

**Model** Part#  
**RC8241** 895500010

**Model** Part#  
**RC8241S** 895500011

Model		RC8240S
Weight		0.12 kg
Hose		8 mm
Dimensions axbxc		191x134 mm
Air cons.		220 l/min
Air cons.		329 l/min
Air inlet		1/4" IG
Sound Lpa		75.1 dB(A)
Nozzle		Safety nozzle

**Safety nozzle**

Model		RC8241
Weight		0.13 kg
Hose		8 mm
Dimensions axbxc		191x134 mm
Air cons.		310 l/min
Air cons.		463 l/min
Air inlet		1/4" IG
Sound Lpa		79.5 dB(A)
Nozzle		4 mm

**Long tube**

Model		RC8241S
Weight		0.14 kg
Hose		8 mm
Dimensions axbxc		294x151 mm
Air cons.		235 l/min
Air cons.		352 l/min
Air inlet		1/4" IG
Sound Lpa		73.4 dB(A)
Nozzle		Safety nozzle

**Safety nozzle**



- Made of durable high quality materials, manufactured with precision
- High air flow even at low pressure
- Tough composite housing insulates against cold air
- With soft TPR-rubber area on the lever
- Ergonomic handle-lever for reduced stress to the user
- Very sturdy air inlet with threaded brass insert
- Soft safety nozzle prevents scratching painted surfaces and injuries
- More silent and powerful than standard nozzle



- Made of durable high quality materials, manufactured with precision
- High air flow even at low pressure
- Tough composite housing insulates against cold air
- With soft TPR-rubber area on the lever
- Ergonomic handle-lever for reduced stress to the user
- Very sturdy air inlet with threaded brass insert



- Made of durable high quality materials, manufactured with precision
- High air flow even at low pressure
- Tough composite housing insulates against cold air
- With soft TPR-rubber area on the lever
- Ergonomic handle-lever for reduced stress to the user
- Very sturdy air inlet with threaded brass insert
- Soft safety nozzle prevents scratching painted surfaces and injuries
- More silent and powerful than standard nozzle

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

# BLOW PENS UNDERBODY COATING GUNS

<b>Model</b>	<b>Part#</b>	<b>Nipple</b>
<b>RC8500</b>	8951011022	ISO 6150 B
<b>RC8502</b>	8951011024	DIN 7.2
<b>RC8502N</b>	8951012217	DIN 7.2

<b>Model</b>	<b>Part#</b>
<b>RC8010</b>	8951070030

<b>Model</b>	<b>Part#</b>
<b>RC8011</b>	8951070040

Model	RC8500
Max. pressure	12 bar
Weight	0.02 kg
Hose	8 mm
Dimensions axbxc	109x10 mm
Air cons.	220 l/min
Air cons.	300 l/min
Air inlet	EURO 7.2-7.4 IG
Nozzle	3 mm

### Pocket size blow gun



- Ideal personal equipment for each mechanic
- Can be kept in your pocket for quick and easy access
- Made of high resistance anodised aluminium
- With adjustable air flow (nozzle ring) and clip

#### Different nipple profiles are available:

<b>RC8500</b>	ISO 6150 B (MIL-C-4109)
<b>RC8501</b>	ISO 6150 C (Stäubli)
<b>RC8502</b>	DIN 7.2-7.4 (Euro profile)
<b>RC8503</b>	British (PCL)
<b>RC8504</b>	ARO 210 (Orion)

Model	RC8010
Container	1 L
Weight	0.6 kg
Hose	8 mm
Dimensions axbxc	250x160 mm
Air cons.	210 l/min
Air cons.	300 l/min
Air inlet	1/4" IG

### For 1 litre bottles



- Underbody coating gun for standard 1 L containers to screw under the gun

#### Accessories for RC8010

Nozzle:	Part# 8951011694
---------	---------------------

Model	RC8011
Container	1 L
Weight	0.8 kg
Hose	8 mm
Dimensions axbxc	250x160 mm
Air cons.	210 l/min
Air cons.	300 l/min
Air inlet	1/4" IG

### For 1 litre bottles









- Underbody coating gun for standard 1 L containers to screw under the gun
- Including 2 nozzles & suction tubes

#### Accessories for RC8011

Nozzle+tube (3 pieces):	Part# 8951011679
-------------------------	---------------------

**Model** RC8035  
**Part#** 8951070050









Model	RC8035
Container	1 L
Weight	 0.4 kg
Hose	 8 mm
Dimensions axbxc	250x180 mm
Air cons.	 230 l/min
Air cons.	 330 l/min
Nozzle	 5 mm
Air inlet	 1/4" IG

### 4 in 1 gun



- One gun for multiple applications:
  1. underbody coating gun. For standard 1 l bottles / cans with thread
  2. cavity coating gun. With long nozzle tube for 1 l containers
  3. cleaning gun. Using the 1 l tank and the long nozzle tube with adjustable nozzle ring
  4. disinfection gun. For air conditioning systems and air channels in the car when using the tank and the long nozzle hose

**Model** RC8115  
**Part#** 8951070034







Model	RC8115
Volume appr.	 1 L
Max. pressure	 2-15 bar
Weight	 0.5 kg
Hose	 8 mm
Dimensions axbxc	374x200 mm
Air cons.	 230 l/min
Air cons.	 330 l/min
Air inlet	 1/4" IG
Nozzle	 5 mm

### Cleaning gun



- Cleaning spray gun
- With long nozzle tube
- Adjustable spraying nozzle
- Including 1 l tank

**Model** RC8000  
**Part#** 8951070000

Model	RC8000
Cartridge	 50 x 220 (310 ml)
Weight	 1.1 kg
Hose	 8 mm
Dimensions axbxc	305x167 mm
Air cons.	 0.8 l/min
Air inlet	 1/4" IG
Vibration	 < 2.5 m/s <sup>2</sup>

### Steel version




- Robust cartridge gun with steel cylinder for cartridges up to 310 ml and up to a size of 220 x 50 mm
- Adjustable air flow and pressure release valve for precise stopping of the material flow without dropping
- For sealants, silicones, one component glues, cements, fillers, grease in aluminium, cardboard and plastic cartridges

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20



## GREASE GUNS



**Model** Part#  
**RC8118** 8951011018

Model	RC8118
Volume appr.	0.6 Liter
Max. pressure	9 bar
Weight	0.15 kg
Hose	8 mm
Dimensions axbxc	263x35 mm
Nozzle	mini

## Refillable spray can 0,6 L



- Spray bottle that can be refilled and recharged with compressed air
- With safety valve and fitting to fill
- Can be refilled with solvents, corrosion protection, lubricants and cleaners or simply with clean compressed air for using it like a blow gun for cleaning
- Max. pressure 9 bar
- Includes 4 different nozzle heads
- The ecological alternative

## Accessories for RC8118

	Part#
Nozzle set 4 pcs:	8951011697
Spray head	8951011698

**Model** Part#  
**RC8132** 8951000059

Model	RC8132
Output pressure (Compression ratio)	170 bar
Flow rate	0.4 g/stroke
Max. pressure	8 bar
Weight	1.53 kg
Hose	8 mm
Dimensions axbxc	264x328 mm
Air cons.	3 l / hub
Air cons.	3 l / hub
Air inlet	1/4" IG

## Single stroke cartridges &amp; loose grease



- Grease gun for cartridges 215 x 50 mm and for loose grease (max. 400 ml)
- Single stroke output
- Only a small portion of grease is pressed out with every push (appr. 4g)
- Delivery includes a rigid nozzle
- Tube l = 116 mm and a high-pressure flexible
- Hose l = 270 mm
- Nose: M10x1,0

**Model** Part#  
**RC8141** 8951070090

Model	RC8141
Output pressure (Compression ratio)	260 bar
Flow rate	64 cm <sup>3</sup> /min continuously
Max. pressure	8 bar
Weight	1.6 kg
Hose	8 mm
Dimensions axbxc	260x328 mm
Air cons.	90 l/min
Air cons.	110 l/min
Air inlet	1/4" IG

## Continuously cartridges &amp; loose grease



- Grease gun with cold-insulated handle
- For cartridges 215 x 50 mm (400 ml) but also for loose grease
- Delivers grease continuously as long as the trigger is pushed
- Includes a rigid nozzle tube and a high-pressure flexible
- Hose (c = 225 mm)
- Nose: M10x1,0

# 13 | Accessories

## Magnetic dishes

Ideal storage for small parts e.g. screws, nuts etc. Applicable in every position including overarm. All magnetic dishes are made of stainless steel. Magnets with rubber cover to avoid scratches.

### Round



**Model** Part#  
**MAGT1** 8951011488

Dimension	ø 150 mm
Magnet diam.	63 mm
Weight	0,3 kg

### Short, square



**Model** Part#  
**MAGT2** 8951011489

Dimensions	240 x 140 mm
Magnet diam.	2 x 83 mm
Weight	0,67 kg

### Long, square



**Model** Part#  
**MAGT3** 8951011490

Dimensions	360 x 160 mm
Magnet diam.	3 x 83 mm
Weight	0,99 kg

## Silencing exhaust hose systems (DUS)



DUS hoses are a system existing of an air supplying hose for the tool and an overlying hose which deflects the outgoing air from the operator and prevents oil and coldness.

Hose system	Part#
DUS 20	8951011866
DUS 21	8951011867
DUS 23	8951011869
DUS 24	8951011870
DUS 25	8951011871
DUS 26	8951011872
DUS 28	8951011874
DUS 35	8955000015

Tools with "RE" in the model name are already equipped with a DUS exhaust system.

## Maintenance units (5 micron)

With aluminium frame and composite bowls, the new range of RC FRLs is the right product to increase the tool's life. The standard 5 microns filter will guarantee that no impurities dust or water will reach your tool. The semi automatic filter makes it very easy to clean your system whenever you want. The screwed gauge is well protected against impact and is always at the right position.

Port Size	1/4"
BSP Part Number	8951000162
Body Material	Aluminum die-cast
Bowl Material	Polycarbonate
Filtration	5 microns
Proof pressure	15 bar
Max air flow (l/min)	2080
Filter bowl capacity	105 ml
Lubricator bowl capacity	125 ml
Drain	Semi automatic drain
Weight	2 kg



Port Size	1/2"
BSP Part Number	8951000164
Body Material	Aluminum die-cast
Bowl Material	Polycarbonate
Filtration	5 microns
Proof pressure	15 bar
Max air flow (l/min)	2600
Filter bowl capacity	105 ml
Lubricator bowl capacity	125 ml
Drain	Semi automatic drain
Weight	2 kg

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

18

19


20

# Clean air, clean work

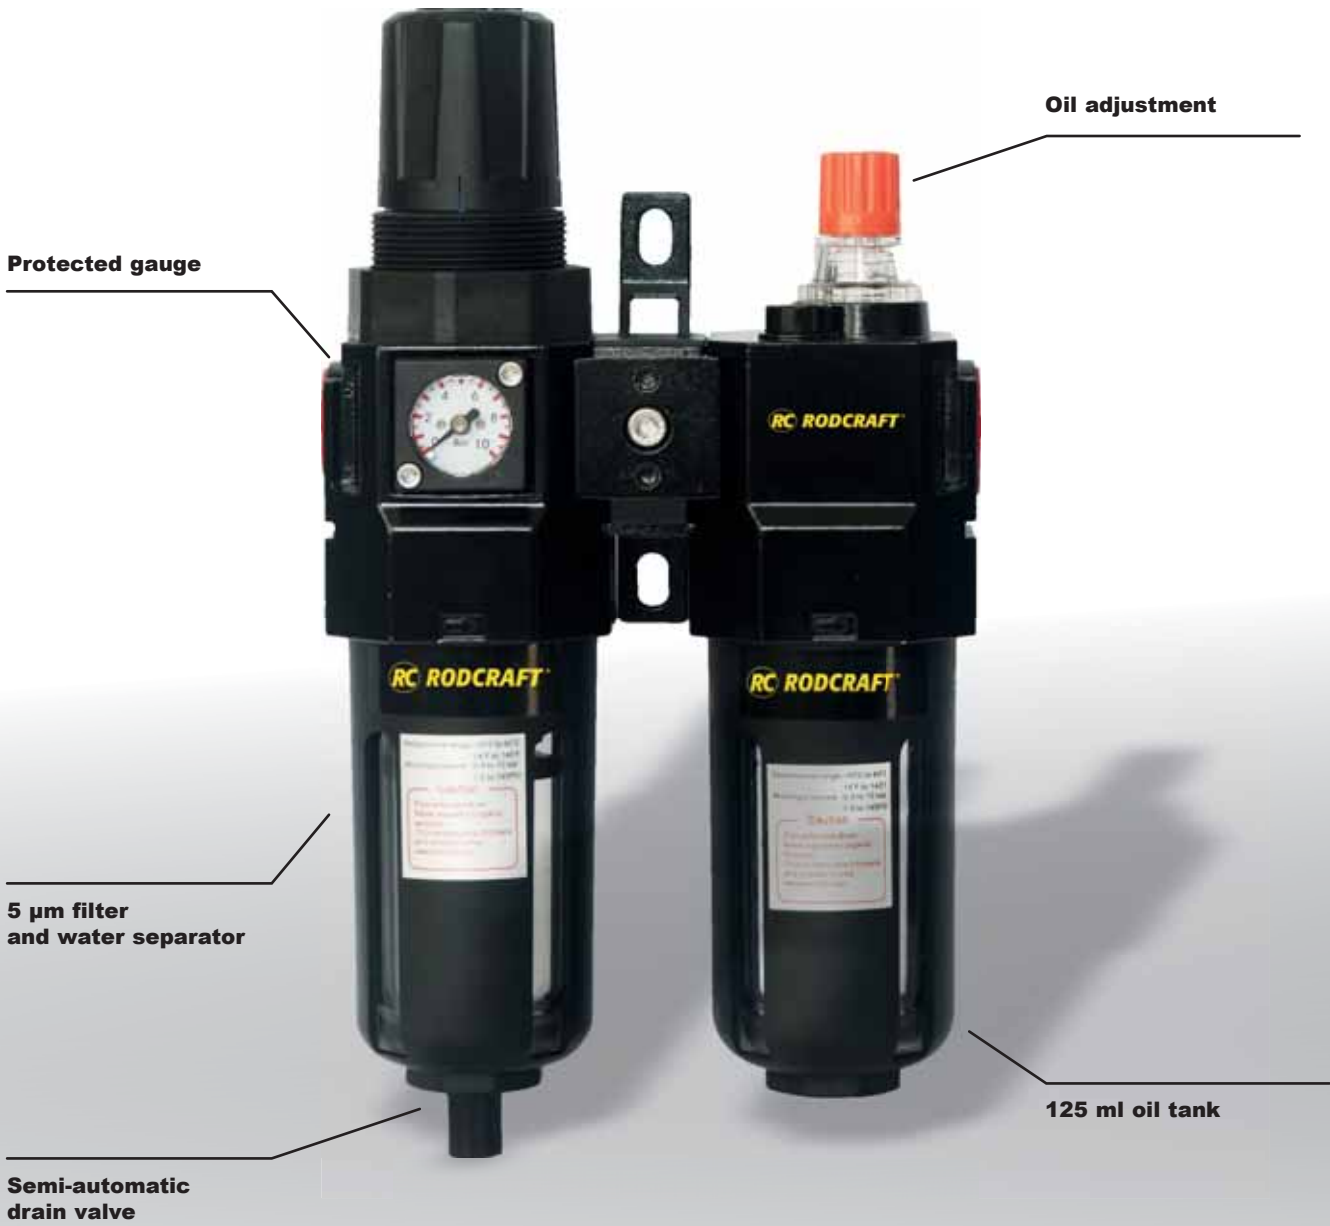

**FRL**

## Hose reels

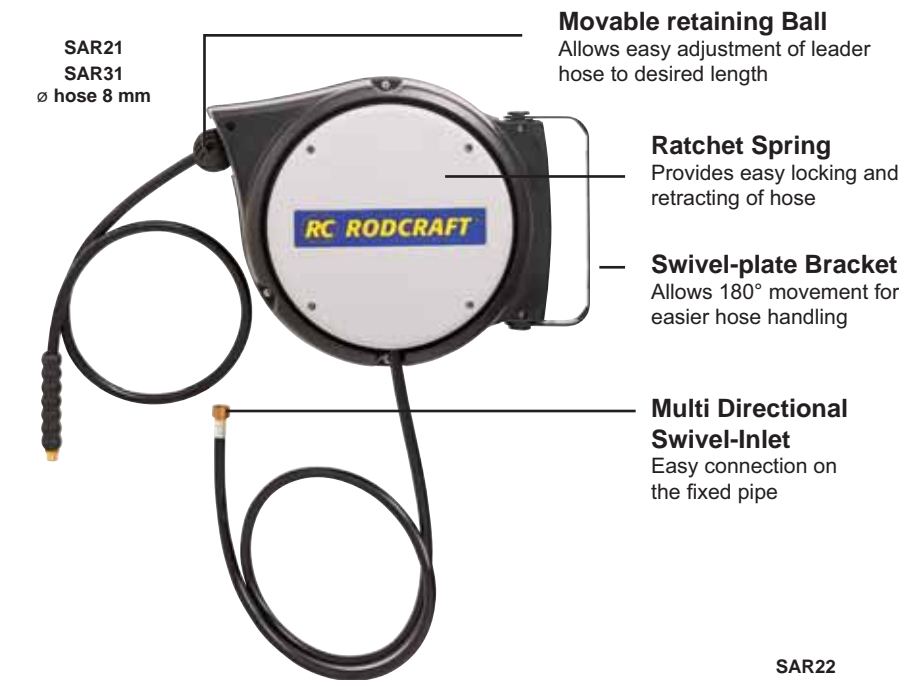

Model	SAR21 (BSP)
Part Number	8951000148
Hose diameter	8 mm (5/16")
Material	Composite
Type	Closed
Thread	1/4"
Hose Length	10 m

Model	SAR31 (BSP)
Part Number	89510000150
Hose diameter	8 mm (5/16")
Material	Aluminum
Type	Closed
Thread	1/4"
Hose Length	10 m

Model	SAR22 (BSP)
Part Number	8951000149
Hose diameter	10 mm (3/8")
Material	Composite
Type	Closed
Thread	3/8"
Hose Length	16 m

Model	SAR32 (BSP)
Part Number	8951000151
Hose diameter	10 mm (3/8")
Material	Aluminum
Type	Closed
Thread	3/8"
Hose Length	16 m

## Power regulator<sup>12</sup>



Model	<b>AR1</b>	Part# 8951011858
In	1/4" IG	
Out	1/4" AG	

## Swivel air joint<sup>1</sup>



Model	<b>DG1</b>	Part# 8951011859
In	1/4" IG	
Out	1/4" AG	

## Inline lubricator<sup>1</sup>



Model	<b>G1K</b>	Part# 8951011851
In	1/4" IG	capacity = 4 ml
Out	1/4" AG	

Model	<b>G1G<sup>3</sup></b>	Part# 8951011852
In	1/4" IG	capacity = 28 ml
Out	1/4" AG	

Model	<b>G2<sup>3</sup></b>	Part# 8951011853
In	3/8" IG	capacity = 28 ml
Out	3/8" IG	

Model	<b>G3<sup>3</sup></b>	Part# 8951011854
In	1/2" AG	capacity = 28 ml
Out	1/2" AG	

Model	<b>G1M</b>	Part# 8951011856
In	1/4" IG	capacity = 12 ml
Out	1/4" AG	

## Inline filter<sup>1</sup>



Model	<b>F1G</b>	Part# 8951011855
In	1/4" IG	
Out	1/4" AG	

<sup>1</sup> For connection into tool air inlet

<sup>2</sup> Reduces power and speed

<sup>3</sup> Adjustable

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20

## Lubricants for air tools



0.6 litre air lubrication "Protecto-lube"  
Part# 8951000290

0.6 litre Impact system oil type SAE30  
Part# 8951000331

## Grease gun, filled



Model **RC8150F** Part# 8951012205  
grease gun, filled  
Dimensions 168x34mm

## Grease gun + cartridges



Model **RC8150** Part# 8951012204  
grease gun, incl. 2 cartridges  
Dimensions 168x34mm

## Cartridges




Model **RC8150K** Part# 8951012206  
5 filled cartridges  
for model 8150F

## PE air hoses




Part#:	8951011831	8951011833	8951011835
Work length	5 m	8 m	10 m
Material:	Polyethylene PE		
Diameter:	8x10mm (inner x outer)		
Fittings:	Euro-coupling / plug		
Working pressure max.	15 bar		

## PUR air hoses

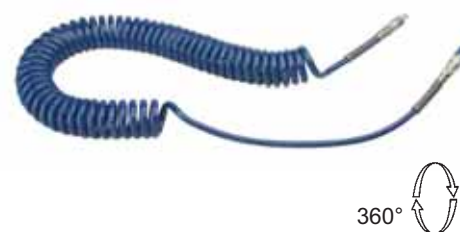

Part#	8951011842	8951011843	8951011844
Work length	4 m	6 m	8 m
Material	Polyurethane PUR		
Diameter	8x12mm (inner x outer)		
Fittings	Euro-coupling / plug		

## PUR air hoses



Part#	8951011845	8951011847
Work length	6 m	4 m
Material	Polyurethane PUR	
Diameter	6,5 x 10 mm	8 x 12 mm
Fittings	1/4" AG	3/8" AG

Part#	8951011846	8951011848
Work length:	6 m	8 m
Material	Polyurethane PUR	
Diameter	8 x 10 mm	8 x 12 mm
Fittings	3/8" AG	3/8" AG

## PVC 50 m air hose



Part#	8951011836	8951011837
Work length	50 m	
Material	Polyvinylchloride PVC	
Diameter	9 x 15 mm	13 x 21 mm
Fittings	./.	
Max pressure	12 bar	



## Balancers & hose balancers

- Stainless steel cable
- The stroke can be limited in retraction for optimum position to grab the load - simple adjustable clamp
- Cable runs in low friction material
- Fast and easy exchange of the spring package due to modular design
- Robust casted aluminium body (closed two piece construction (see A))
- Precisely adjustable balancing force (spring tension) for minimum pull resistance (grabbing) and easy setting of the balancing point
- With additional safety suspension

### Info:

- A aluminium casted body (closed two piece construction), upper suspension with safety hook running on ball bearing, tapered drum with ball bearing for even pull force for balancing effect over full stroke after grabbing the load
- B equipped with a safety lock system against drop in case of a spring breakage (for capacities over 3 kg minimum load)
- C permanently visible cable for fast security checks  
hook on upper suspension can be aligned  
Stop system to position the load at any height ("STOP")



## Balancers

Model	Part#:	Capacity kg	Stroke mm	Info
9311	8951011260	0,4-1,0	1600	
9312	8951011261	1,0-2,0	1600	
9313	8951011262	2,0-3,0	1600	
9320	8951011263	1,0-2,5	2000	B
9321	8951011264	2,0-4,0	2000	B
9322	8951011265	4,0-6,0	2000	B
9323	8951011266	6,0-8,0	2000	B
9336	8951011267	2,0-4,0	2500	B
9337	8951011268	4,0-6,0	2500	B
9338	8951011269	6,0-8,0	2500	B
9339	8951011270	8,0-10,0	2500	B
9340	8951011271	10,0-14,0	2500	B



## Balancers

Model	Part#:	Capacity kg	Stroke mm	Info
9354	8951011276	4,0-7,0	2000	A,B
9355	8951011277	7,0-10	2000	A,B
9356	8951011278	10-14	2000	A,B
9357	8951011279	14-18	2000	A,B
9358	8951011280	18-22	2000	A,B
9364	8951011285	25-30	2000	A,B
9366	8951011287	35-45	2000	A,B
9367	8951011288	45-55	2000	A,B
9369	8951011290	65-75	2000	A,B



## Balancers with stop function

Model	Part#:	Capacity kg	Stroke mm	Info
9346	8951011272	2,0-4,0	2500	B,C
9347	8951011273	4,0-6,0	2500	B,C
9348	8951011274	6,0-8,0	2500	B,C
9349	8951011275	8,0-10	2500	B,C



## Hose balancers

Model	Part#:	Capacity kg	Stroke mm	Thread
9200	8951011256	0,7-0,8	1350	1/4"
9201	8951011257	0,75-1,5	1350	1/4"
9202	8951011258	1,2-2,5	1350	1/4"



hoses made of polyurethane (hose instead of a cable) / 8 bar max. operating pressure / outer hose diameter 7,8 mm

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18


19

20

## Safety series 7.2 mm (Euro-profile)

### Patented Composite - Safety Couplings (EURONORM and ISO safety standard)

- Robust design with low weight
- Safety system (2 movements with pressure release)
- Very high flow rate (even at 6,3 bar using 7,2 mm diameter series approx. 1700 l/min)
- New technology: extremely air proof, low force coupling, reduced danger of scratching paint due to composite elements, industrial gasket system with nitrile O-rings
- Excellent material quality: shock resistant, low wear, squeeze-proof design
- 10 times higher life time than standard couplings
- Galvanised steel thread fittings, male threads ready to seal with teflon coating
- Plug made of steel with anti-stain coating, male threads ready to seal with teflon coating
- Several plug-coupling profiles available EURO/DIN 7.2 mm - 7.4 mm, SO 6150 B, MIL 409 C (6 mm) and 8 mm high-flow format
- With check valve

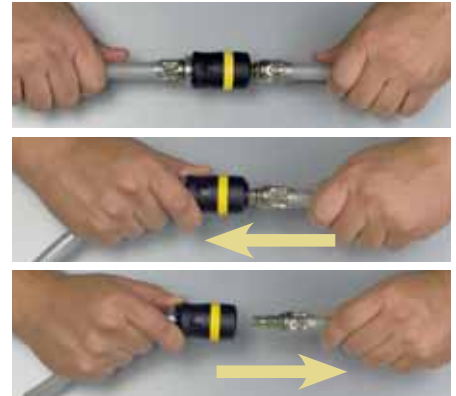

### Safety System

First step:  
the valve stops the air flow, pressure is released from plug side of the air line i.e. no danger of lashing out hose tails (pull)

Second step:  
complete separation of the connection without pressure (press) i.e. no danger

### Coupling with thread



Model	Dimension	Part#:
SK703	1/2" AG	8951011742
SK704	1/4" IG	8951011743
SK705	3/8" IG	8951011744
SK706	1/2" IG	8951011745

AG = outer thread  
IG = inner thread

### Diverter with couplings



Model	Dimension	Part#:
SK760	1/4" IG	8951011762
SK761	3/8" IG	8951011763
SK762	1/2" IG	8951011764

### Plug for hoses



Model	ø Hose inner	Part#:
SK716	ø 6 - 7 mm	8951011751
SK718	ø 8 mm	8951011752
SK719	ø 9 mm	8951011753
SK720	ø 10 mm	8951011754

### Coupling for hoses



Model	Dimension	Part#:
SK707	ø 6 - 7 mm	8951011746
SK708	ø 8 mm	8951011747
SK709	ø 9 - 10 mm	8951011748
SK713	ø 13 mm	8951011750

### Plug with thread




Model	Dimension	Part#:
SK728	1/4" AG	8951011756
SK729	3/8" AG	8951011757
SK730	1/2" AG	8951011758
SK731	1/4" IG	8951011759
SK732	3/8" IG	8951011760
SK734	1/2" IG	8951011761



**Brass claw couplings**

For very high flow rates (use valve upstream for safety, does not contain a check valve) typical for air connections to construction site compressors



**Coupling with thread**

Model	Dimension	Part#:
KKG1/2	1/2" AG	8951011816
KKG3/4	3/4" AG	8951011817




AG = outer thread  
IG = inner thread

**Brass standard 7,2 mm**

Solid version with high flow rate for daily use  
With check valve

**Coupling with thread**



Dimension	Part#:
BSP 1/4" AG	8951011784
BSP 3/8" AG	8951011785
BSP 1/2" AG	8951011786
BSP 1/4" IG	8951011787
BSP 3/8" IG	8951011788
BSP 1/2" IG	8951011789

**Coupling for hoses**



Dimension	Part#:
ø 6 - 7 mm	8951011790
ø 9 - 10 mm	8951011791
ø 13 mm	8951011792

**Diverter with coupling**



Dimension	Part#:
3/8" IG 2-Weg	8951011819
3/8" IG 3-Weg	8951011820

**Plug for hoses**




ø Hose inner	Part#:
ø 6 - 7 mm	8951011795
ø 9 mm	8951011796
ø 13 mm	8951011797

**Plug with thread**



Dimension	Part#:
BSP 1/4" AG (Steel)	8951011808
BSP 1/4" AG	8951011809
BSP 3/8" AG	8951011810
BSP 1/2" AG	8951011811
BSP 1/4" IG	8951011812
BSP 3/8" IG	8951011813
BSP 1/2" IG	8951011814

**Hose stems**



Dimension	ø Hose inner	Part#:
BSP 1/4" AG	6 mm	8951011801
BSP 1/4" AG	9 mm	8951011802
BSP 3/8" AG	9 mm	8951011803
BSP 3/8" AG	13 mm	8951011804
BSP 1/2" AG	13 mm	8951011805
BSP 1/2" AG	9 mm	8951011806

**Threaded connectors**



Dimension 1	Dimension 2	Part#:
1/4" AG	1/4" AG	8951011822
3/8" AG	1/4" AG	8951011824
3/8" AG	3/8" AG	8951011821
1/2" AG	3/8" AG	8951011825
1/2" AG	1/2" AG	8951011827
3/8" AG	1/4" IG	8951011823
1/2" AG	3/8" IG	8951011828
1/2" AG	1/4" IG	8951011839

**Hose connector**



Dimension	inner hose ø	Part#:
ø 6 mm	6 mm	8951011798
ø 9 mm	9 mm	8951011799
ø 13 mm	13 mm	8951011800

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20



RH215

## 14| Trolley Jacks

- | Aluminium hydraulic trolley jacks for cars
- | Hydraulic trolley jacks
- | Balloon jacks
- | Air-hydraulic jacks for trucks & vans
- | Bottle jacks
- | Jack stands

01

02

03

04

05

06

07

08

09

10

11

12

13

**14**

15

16


17

18

19

20

# HYDRAULIC TROLLEY JACKS

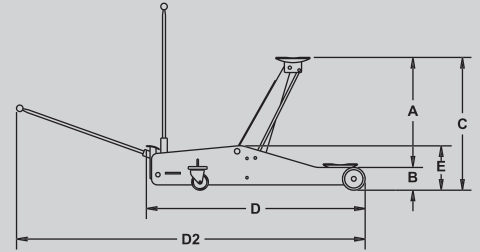

**Model** Part#  
**RH135** 8951082025

**Model** Part#  
**RH201** 8951000003



**Model** Part#  
**RH290** 8951082031

Model	RH135
Capacity	1.3 t
Weight	10.5 kg
Dimensions:	
A	295 mm
B	80 mm
C	375 mm
D	505 mm
D <sup>2</sup>	1440 mm
E	130 mm
F	235 mm
G	235 mm

**Stroke:** 80-375 mm



- Very light aluminium jack
- Ideal for break-down service
- Short 2 piece handle bar
- Equipped with carrying handle
- Fast stroke: with 11 pump strokes up to the max. without load
- Saddle plate protection with rubber cover
- Lever with protective sponge to prevent scratches on car bodies

Model	RH201
Capacity	2 t
Weight	20.5 kg
Dimensions:	
A	375 mm
B	85 mm
C	460 mm
D	695 mm
D <sup>2</sup>	1820 mm
E	155 mm
F	285 mm
G	320 mm


**Stroke:** 85-460 mm



- Very light aluminium jack
- Ideal for break-down service
- Short 2 piece handle bar
- For easy transport the jack is equipped with 3 carrying handles
- Fast stroke with double pump
- Saddle plate protection with rubber cover
- Lever with protective sponge to prevent scratches on car bodies

Model	RH290
Capacity	3 t
Weight	41.5 kg
Dimensions:	
A	365 mm
B	145 mm
C	490 mm
D	650 mm
D <sup>2</sup>	1650 mm
E	160 mm
F	275 mm
G	350 mm

**Stroke:** 145-490 mm

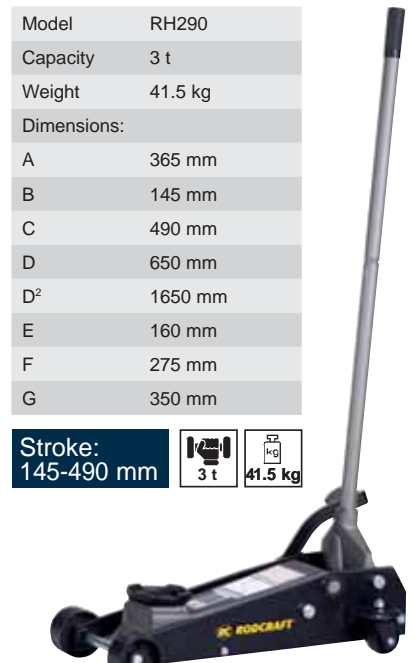

- Small & compact trolley jack
- Pump lever can be disassembled (2 pieces)
- For easy storage and transport
- With foot pedal for fast approach





**Model** Part#  
**RH151** 8951000051

Model	RH151
Capacity	1.5 t
Weight	50.5 kg
Dimensions:	
A	460 mm
B	80 mm
C	540 mm
D	920 mm
D <sup>2</sup>	2140 mm
E	153 mm
F	282 mm
G	382 mm

**Stroke:** 80-540 mm



- Hydraulic trolley jack with sturdy steel construction
- Precise hand valve for lowering
- Smooth oil and acid resistant plastic wheels with foot pedal for fast approach
- Pump lever with protector sponge to prevent scratches
- Low profile jack with extra long body to get very deep under a vehicle up to 515 mm at a height of only 80 mm
- Compact when disassembled with 2 piece pump lever for easy transport and storage



**Model** Part#  
**RH251** 8951082024

Model	RH251
Capacity	2 t
Weight	58 kg
Dimensions:	
A	665 mm
B	135 mm
C	800 mm
D	1340 mm
D <sup>2</sup>	2100 mm
E	190 mm
F	295 mm
G	430 mm

**Stroke:** 135-800 mm



- Hydraulic trolley jack with sturdy steel construction
- Precise hand valve for lowering
- Smooth oil and acid resistant plastic wheels
- With foot pedal for fast approach
- High lifter up to 800 mm max.



**Model** Part#  
**RH215** 8951082026

Model	RH215
Capacity	2 t
Weight	39.4 kg
Dimensions:	
A	430 mm
B	75 mm
C	505 mm
D	750 mm
D <sup>2</sup>	1960 mm
E	150 mm
F	270 mm
G	375 mm

**Stroke:** 75




- Hydraulic trolley jack with sturdy steel construction
- Precise hand valve for lowering
- Smooth oil and acid resistant plastic wheels
- With foot pedal for fast approach
- Pump lever with protector sponge to prevent paint scratches
- Low profile and large final height (75-505 mm)
- Fast lifting stroke due to two pump pistons
- Long pedal for fast approach
- Compact when disassembled with 2 piece pump lever for easy transport and storage



01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20


# HYDRAULIC TROLLEY JACKS

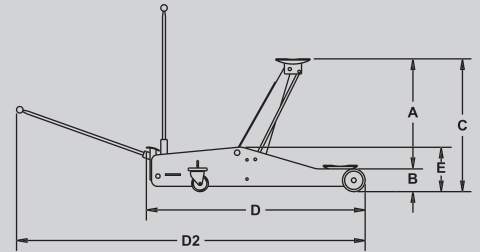

**Model** Part#  
**RH315** 895100063

Model	RH315
Capacity	3 t
Weight	45 kg
Dimensions:	
A	455 mm
B	95 mm
C	550 mm
D	779 mm
D <sup>2</sup>	1979 mm
E	160 mm
F	160 mm
G	364 mm

**Stroke:** 95-550 mm  

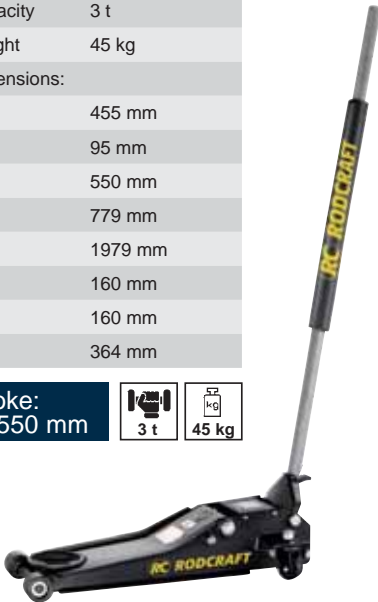- Hydraulic trolley jack with sturdy steel construction
- Precise hand valve for lowering
- Smooth oil and acid resistant plastic wheels
- Long pedal for fast approach
- Pump lever with protector sponge to prevent paint scratches
- Fast lifting stroke due to two pump pistons
- Compact when disassembled with 2 pieces
- Pump lever for easy transport and storage



**Model** Part#  
**RH301** 8951082032

Model	RH301
Capacity	3 t
Weight	70 kg
Dimensions:	
A	490 mm
B	115 mm
C	605 mm
D	1320 mm
D <sup>2</sup>	2440 mm
E	190 mm
F	245 mm
G	315 mm

**Stroke:** 115-605 mm  




- Hydraulic trolley jacks with sturdy steel construction for daily workshop use.
- With precise hand valve for lowering
- Equipped with smooth oil and acid resistant plastic wheels
- Long pedal for fast approach and quick lifting of smaller loads
- Pump lever with protector sponge to prevent paint scratches
- Pump lever with T-end for two-handed operation with valve on the lever top
- High lifter up to 800 mm max.

**Model** Part#  
**RH501** 8951082050

Model	RH501
Capacity	5 t
Weight	95 kg
Dimensions:	
A	530 mm
B	150 mm
C	680 mm
D	1420 mm
D <sup>2</sup>	2560 mm
E	205 mm
F	290 mm
G	360 mm


**Stroke:** 150-680 mm  




- Hydraulic trolley jack for truck
- With foot pedal for fast approach
- Hydraulic system with pump lever allows autonomous operation without compressed air
- Easy to position due to foot rest on back (turning on the spot)
- Lever can be locked in 3 angles for storage and positioning deeply under a low vehicle
- Grease nipples on all important joints








**Model**    **Part#**  
**RH310**    **8951082100**

Model	RH310
Capacity	10 t
Weight	123 kg
Dimensions:	
A	430 mm
B	175 mm
C	605 mm
D	1600 mm
D <sup>2</sup>	2550 mm
E	270 mm
F	380 mm
G	410 mm

**Stroke:**  
 175-605 mm



- Hydraulic trolley jack for trucks
- With foot pedal for fast approach
- Hydraulic system with pump lever allows autonomous operation without compressed air
- With LCS lowering control system for slow descent even when heavily charged
- "Dead man control" auto-stop valve

# The all-rounders!

**Pump lever with protector sponge to prevent paint scratches**

**Foot pedal for fast approach**

**Grease nipple - easy to access**

**Rubber protected plate prevents damage and slipping**

**Smooth oil and acid resistant plastic wheels**

**Sturdy steel construction for daily workshop use**



**Model C225**


Rubber inlay  
 Ø 137 mm (C 225) for RH290 Part#: 8951011092

**RH215**  
**RH315**

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



# BALLOON JACKS



**Model BC2-2S** Part# 8951000177

**Model BC2-2L** Part# 8951000178




**Model BC2-3L** Part# 8951000179

Model	BC2-2S
Capacity	2 t
Weight	15 kg
Dimensions:	
A - A max	115 - 350 mm
B	265 mm
C	185 mm
D	82 mm
E	98 mm
F	80 mm
G	- mm
Stroke: 235 mm	

Model	BC2-2L
Capacity	2 t
Weight	18 kg
Dimensions:	
A - A max	115 - 350 mm
B	265 mm
C	185 mm
D	82 mm
E	98 mm
F	80 mm
G	1000 mm
Stroke: 235 mm	


Model	BC2-3L
Capacity	2 t
Weight	19 kg
Dimensions:	
A - A max	200 - 500 mm
B	250 mm
C	185 mm
D	82 mm
E	98 mm
F	60 mm
G	1000 mm
Stroke: 300 mm	



- From 115 to 430 mm within extension
- Highly resistant diaphragm and internal telescopic guide
- Overload safety valve
- On/Off ergonomic lever
- 115 mm in uninflated position
- Extension included: 80 mm height



- From 115 to 430 mm within extension
- Highly resistant diaphragm and internal telescopic guide
- Overload safety valve
- On/Off ergonomic lever
- Adjustable handle and composite wheels
- 115 mm in uninflated position
- Extension included: 80 mm height



- From 200 to 560 mm within extension
- Highly resistant diaphragm and internal telescopic guide
- Overload safety valve
- On/Off ergonomic lever
- Adjustable handle and composite
- 200 mm in uninflated position
- Extension included: 60 mm height




## Accessories for BC2 serie

**Model BC2-2S/2L**  
80 mm extension Part#: 8950312038

**Model BC2-3L**  
60 mm extension Part#: 8950312081



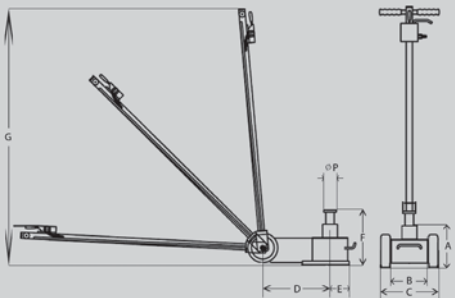



<b>Model</b>	Part#
LHH22	8951084201
LHH35	8951084350

Model	LHH22	LHH35
Capacity	20 t	32 t
Weight	49 kg	54.4 kg
Dimensions:		
A	210 mm	255 mm
B	205 mm	250 mm
C	320 mm	330 mm
D	330 mm	510 mm
D+E	430 mm	610 mm
F	325 mm	368 mm
G	1200 mm	1200 mm
P	50 mm	50 mm


**Stroke:**  
 LHH22: 210-435 mm  
 LHH35: 255-488 mm



- Short and compact, very easy to manoeuvre
- Overload control and safety valve against undesired descent
- Piston is retracted by 4 springs
- Piston includes integrated threaded extension
- Front handle for easier carrying
- Including adapters: broad saddle with diameter 68 mm, height 20 mm. Diameter 48 mm, heights 20/60/100 mm
- Air supply pressure needs to be 7 - 10 bar
- Air consumption 300 l/min.
- According to EN 292

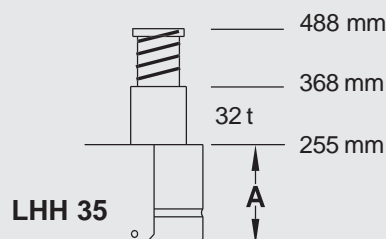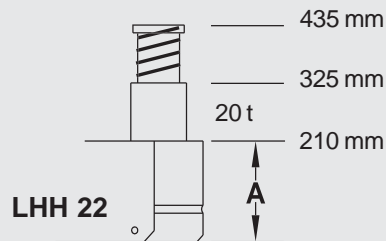

# AIR-HYDRAULIC JACKS

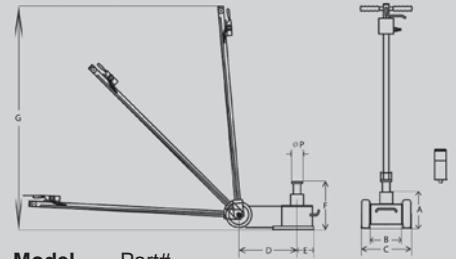

**Model** Part#  
**ATJ30-2** 8951000269

**Model** Part#  
**ATJ50-3** 8951000270


**Model** Part#  
**ATJ80-2** 8951000272

Model	ATJ30-2
Capacity	30 / 15 t
Max. height with extensions	409 mm
Net weight	38 kg
A	150 mm
B	164 mm
C	260 mm
D	240 mm
E	86 mm
D+E	326 mm
F	223/289 mm
G	1365 mm
P	71 mm


Model	ATJ50-3
Capacity	50/25/15 t
Max. height with extensions	472 mm
Net weight	73 kg
A	160 mm
B	200 mm
C	282 mm
D	470 mm
E	85 mm
D+E	555 mm
F	222/283/352 mm
G	1430 mm
P	71 mm

Model	ATJ80-2
Capacity	80/50 t
Max. height with extensions	563 mm
Net weight	106 kg
A	230 mm
B	254 mm
C	340 mm
D	415 mm
E	105 mm
D+E	520 mm
F	341/443 mm
G	1610 mm
P	82 mm

**Capacity 30 t**



**Capacity 50 t**



**Capacity 80 t**




- Ultra compact and light weight construction
- Maximum height: 409 mm
- Air powered piston
- Includes 2 extensions for higher lifting - Stored on handle for transport
- Piston and pump
- Anti dust seals
- Ideal for easily accessing lifting points on low chassis trucks and buses
- Convenient joystick controls
- Cylinder mounted carrying handle
- 1.3 m / long handle bar (1 piece handle) allows easy access to controls when fully positioned under vehicle
- Handle bar locks in 3 positions: 45°, 90° & 180°
- Large & soft rubber wheels


- Large working range for all type of applications
- Maximum height: 472 mm
- Air powered piston
- Includes 2 extensions for higher lifting - Stored on handle for transport
- Piston and pump
- Anti dust seals
- Ideal for easily accessing lifting points on low chassis trucks and buses
- Convenient joystick controls
- Cylinder mounted carrying handle
- 1.3 m / long handle bar (1 piece handle) allows easy access to controls when fully positioned under vehicle
- Handle bar locks in 3 positions: 45°, 90° & 180°
- Large & soft rubber wheels

- Maximum height: 563 mm
- Air powered piston
- Includes 2 extensions for higher lifting - Stored on handle for transport
- Piston and pump
- Anti dust seals
- Ideal for easily accessing lifting points on low chassis trucks and buses
- Convenient joystick controls
- Cylinder mounted carrying handle
- 1.6 m / long handle bar (1 piece handle) allows easy access to controls when fully positioned under vehicle
- Handle bar locks in 3 positions: 45°, 90° & 180°
- Large & soft rubber wheels


**Max height 409 mm**

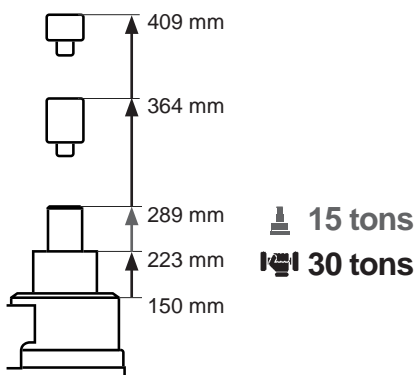

**Max height 472 mm**

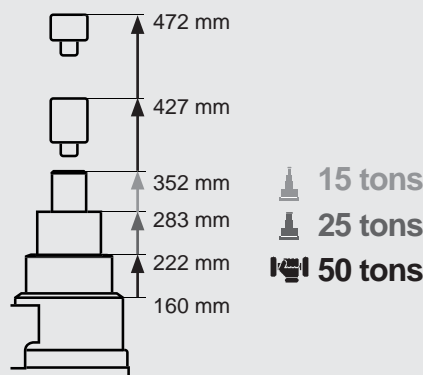

**Max height 563 mm**

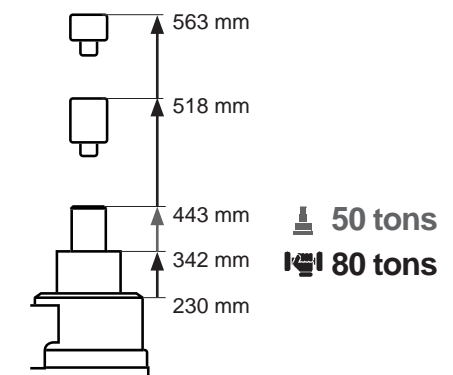

# Air-hydraulic Jacks

## 30 T, 50 T & 80 T capacity

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20




**Easy to use:**  
 - Controlled with a joy stick  
 - Swiveling inlet

**Easy to transport:**  
 Carrying handle on the cylinder  
 and large wheel in middle

**Fast lifting:**  
 High pressure  
 pneumatic pump

**High stability:**  
 Large base


**Solid frame:**  
 Large metal frame  
 to protect inside  
 components from shock

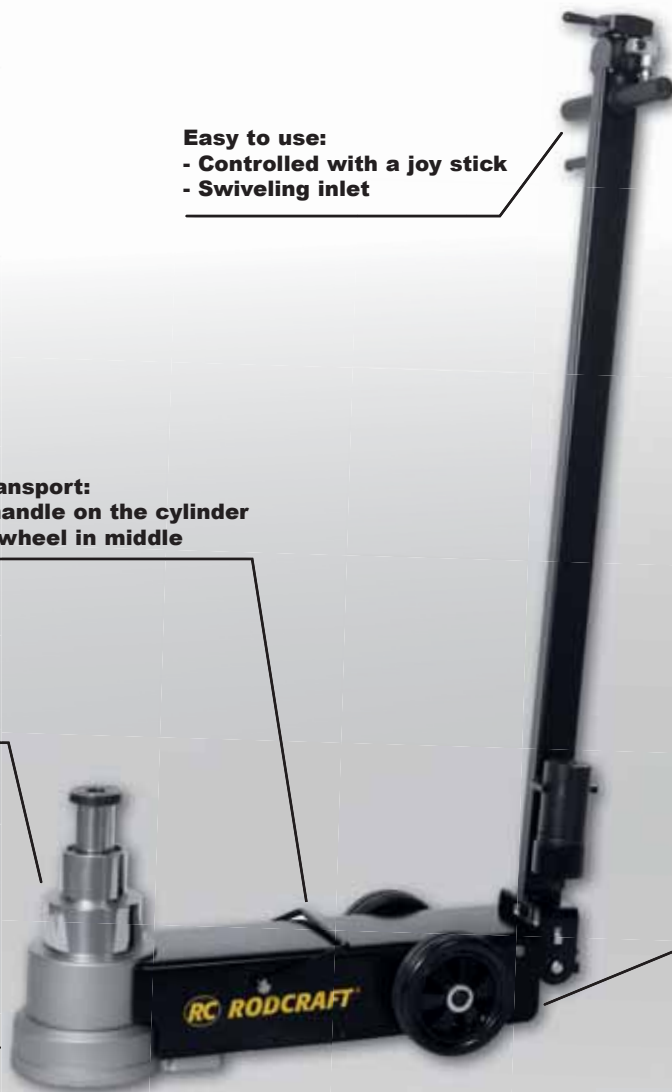

**Easy maneuvering:**  
 - Long handle bar and controlpanel at the end of the grip allowsthe jack to be pushed far underthe vehicle  
 - Handle bar locks in 3 positions: 45°, 90° & 180°  
 - Large & soft rubber wheels




**ATJ30-2**  
**ATJ50-3**  
**ATJ80-2**



# Bottle jacks 2t - 50t capacity

certified according to DIN 76024

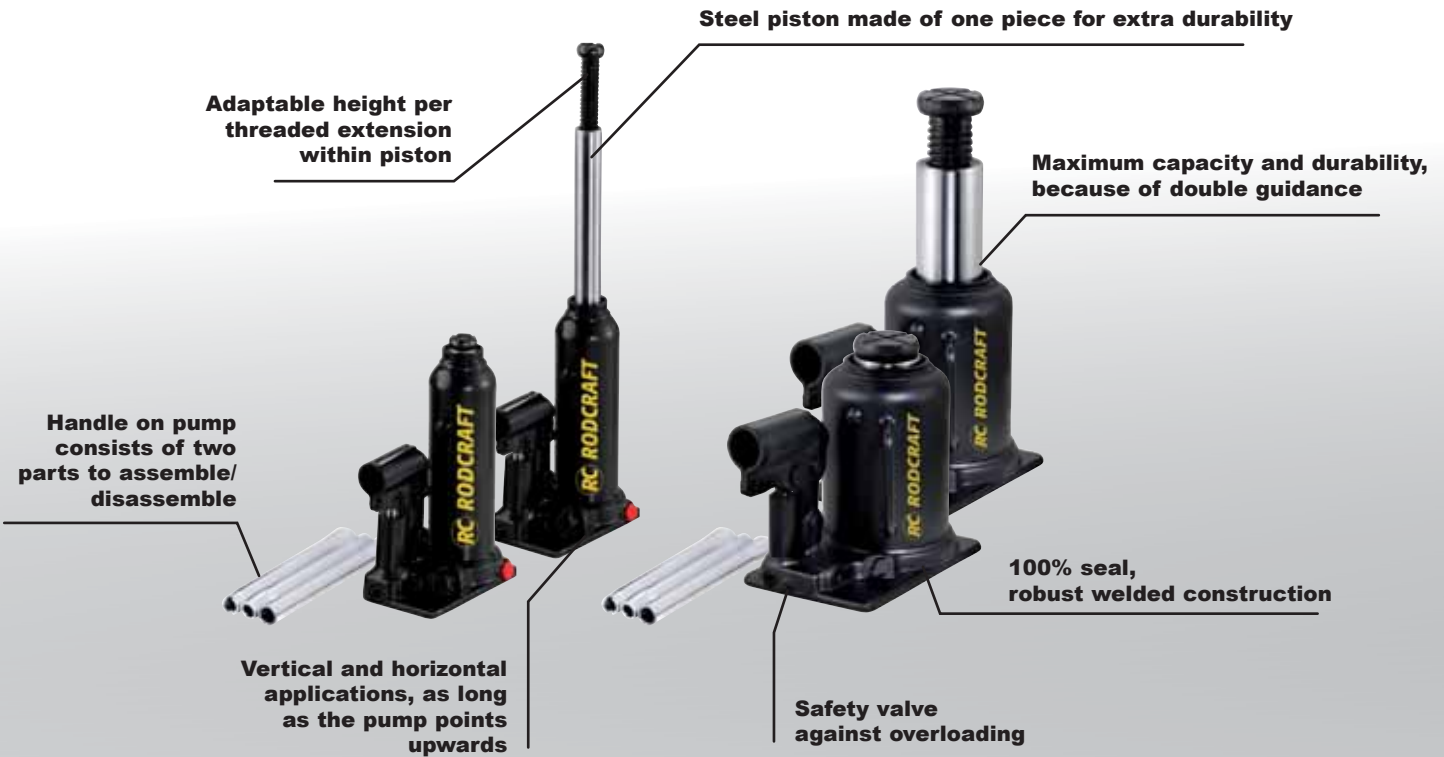

- Hydraulic system with mounted manual pump is powerful, compact, versatile
- Maximum capacity and durability, because of double guidance
- 100% seal due to robust welded construction
- High stability, due to large base plate
- Vertical and horizontal applications, as long as the pump points upwards
- Fast and easy adaptable height, per threaded extension within piston
- With safety valve against overloading
- Steel piston made of one piece for extra durability
- Handle on pump consists of two parts to assemble/disassemble

Model	MGN2	MGN3	MGN5	MGN8	MGN12	MGN12F	MGN12L	MGN20	MGN20F	MGN30	MGN50L
Part#	8951000009	8951000010	8951000011	8951000012	8951000013	8951000127	8951000128	8951000014	8951000129	8951000015	8951000130
Capacity	2 t	3 t	5 t	8 t	12 t	12 t	12 t	20 t	20 t	30 t	50 t
Weight	2.4 kg	2.9 kg	3.8 kg	5.8 kg	6.7 kg	9.5 kg	5.9 kg	9.1 kg	13 kg	18.3 kg	35.3
Dimensions:											
A (min.)	178 mm	190 mm	198 mm	200 mm	176 mm	238 mm	155 mm	182 mm	275 mm	280 mm	300 mm
A+B (max.)	305 mm	325 mm	340 mm	320 mm	275 mm	390 mm	225 mm	280 mm	445 mm	455 mm	480 mm
C (+extension)	52 mm	62 mm	70 mm	72 mm	76 mm	90 mm	45 mm	40 mm	70 mm	-	-
D	347 mm	366 mm	390 mm	394 mm	347 mm	478 mm	270 mm	308 mm	514 mm	445 mm	482 mm
E	120 mm	125 mm	140 mm	160 mm	175 mm	195 mm	140 mm	195 mm	205 mm	200 mm	220 mm
F	80 mm	85 mm	90 mm	100 mm	120 mm	145 mm	105 mm	145 mm	140 mm	150 mm	175 mm
G	20 mm	23 mm	29 mm	35 mm	43 mm	43 mm	43 mm	53 mm	53 mm	62 mm	65 mm

Model Part#  
**MGN12F** 8951000127  
**MGN12L** 8951000128

Model Part#  
**MGN20F** 8951000129

Model Part#  
**MGN50L** 8951000130


Model	MGN12F	MGN12L
Capacity	12 t	12 t
Weight	9.5 kg	5.9 kg
Dimensions:		
A (min.)	238 mm	155 mm
A+B (max.)	390 mm	225 mm
C (extension)	90 mm	45 mm
D	478 mm	270 mm
E	195 mm	140 mm
F	145 mm	105 mm
G	43 mm	43 mm

Height 480 mm & 270 mm




Model	MGN20F
Capacity	20 t
Weight	13 kg
Dimensions:	
A (min.)	275 mm
A+B (max.)	445 mm
C (extension)	70 mm
D	514 mm
E	205 mm
F	140 mm
G	53 mm

Height 515 mm



Model	MGN50L
Capacity	50 t
Weight	35.3 kg
Dimensions:	
A (min.)	300 mm
A+B (max.)	480 mm
D	482 mm
E	220 mm
F	175 mm
G	65 mm

Height 480 mm



- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



# Jack stands 1.5t - 16t Capacity



- Welded, sturdy steel tube construction, strutted and easy to carry
- Good standing stability since each foot is equipped with a broad plate
- Steel pipe stem with models with threaded spindle, ergonomic steel tube stem for easier carrying on other jack stands with large bolt on chain and safety clamp.
- USBN5.0 finely adjustable with rubber protector on top, especially suited for vans and buses

Delivered in pairs



Model	USB1.5	USB1.5H	USB3	USB5	USBN5	USB8	USB8H	USB12G	USB12HG	USB16H
Part#	8951000096	8951000097	8951000098	8951000099	8951000100	8951000101	8951000102	8951000103	8951000104	8951000106
Capacity	1 1/2 ton(s)	1 1/2 ton(s)	3 t	5 t	5 t	8 t	8 t	12 t	12 t	16 t
Weight	2.2 kg	3.6 kg	3.8 kg	5 kg	4.3 kg	7.9 kg	11.4 kg	10.6 kg	14.4 kg	19.5 kg
min. height	260 mm	430 mm	320 mm	370 mm	245 mm	385 mm	580 mm	345 mm	475 mm	430 mm
max. height	405 mm	700 mm	530 mm	580 mm	350 mm	600 mm	950 mm	515 mm	730 mm	725 mm
Stroke	145 mm	270 mm	210 mm	210 mm	105 mm	215 mm	370 mm	170 mm	255 mm	295 mm
Positions in height	5 steps	5 steps	5 steps	5 steps	Direct	5 steps	6 steps	Direct	Direct	5 steps



# Jack stands 2t - 6t Capacity



- High stability due to feet with extra large plate
- Self locking handle & locking pin increases safety
- Durable & resistant ductile iron support column & rugged steel frame construction
- Easy to operate : ratchet action for height adjustment

Delivered in pairs

Model	UBZ-2	UBZ-3	UBZ-6
Part#	8951000027	8951000028	8951000029
Capacity	2 t	3 t	6 t
Weight	2.5 kg	3 kg	5 kg
min. height	280 mm	300 mm	400 mm
max. height	425 mm	455 mm	620 mm
Stroke	145 mm	155 mm	220 mm
Positions	10 steps	11 steps	12 steps



- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



WK102K

## 15| Motor

- | Workshop cranes
- | Motor stands
- | Motor repair bridge

01

02

03

04

05

06

07

08

09

10

11

12

13

14

**15**

16



17

18

19

20

# FOLDABLE CRANES



**Model** Part#  
**WK102K** 8951080101



**Model** Part#  
**WK1000** 8951000166

Model	WK102K
Capacity P1	1000 kg
Capacity P2	750 kg
Capacity P3	500 kg
Capacity P4	250 kg
Weight	77.5 kg
A	1560 mm
E	1920 mm
G	2120 mm
J	1480 mm
K	825 mm
L	935 mm
M	160 mm
P	430 mm
S	440 mm
R min.	960 mm
R med.	1060 mm
R max.	1160 / 1230 mm

Model	WK1000
Capacity P1	1000 kg
Capacity P2	750 kg
Capacity P3	500 kg
Capacity P4	NA
Weight	98.5 kg
A	1560 mm
E	2120 mm
G	2240 mm
J	1525 mm
K	780 mm
L	981 mm
M	90 mm
P	480 mm
S	460 mm
R min.	1100 mm
R med.	1225 mm
R max.	1350 mm

**Foldable**

**Strong and easy to use**



- Additional small wheels for moving the crane also easily when folded up
- With oil and acid resistant wheels, the rear wheels swivel, the front wheels are fixed
- The lifting arm can be extended in 4 positions
- Oil and acid resistant wheels, the rear wheels swivel, the front wheels are fixed

- Double action pump system
- 200 ° Swiveling pump
- Safety release valve
- Ultralow profile legs (90mm)
- Foldable leg with safety pin and extra storage wheels
- Large handle and swiveling nylon wheels 3 arm position

# Fast lifting 1T crane

**Large working range:  
From 0 mm to 2240**

**Double action pump  
Swiveling handle**

**Low profile leg: 90mm only**



**Foldable feet with extra  
storage wheels**



- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

**WK1000**



GHN600



## 16| Gear

| Transmission jacks

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

**16**

17


18

19

20




# TRANSMISSION JACKS



**Model** Part#  
**GHN300** 8951000131

Model	GHN300
Capacity	300 kg
min. height	1180 mm
max. height	2010 mm
Weight	30.6 kg
A / B	560 / 590 mm
C	75 mm
D	1180 mm
E	2010 mm
F	830 mm
G	460 mm
H	20 mm
Oil volume	760 ml

**Capacity 300 kg**

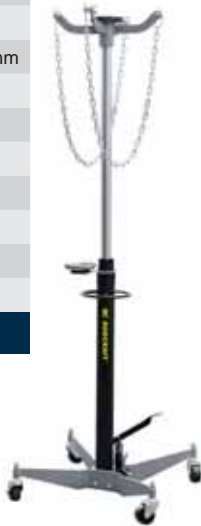


- Chromed cylinder in an oil bath
- Easy to position with round horizontal handle
- Large foot pedal for lifting without locking position
- Small foot pedal for lowering
- Automatic descent stop-pedal
- Safety valve against overloading
- Reversible crown to place drain pans
- Incl. 1,2 m length chain to fix load

**Model** Part#  
**GHN600** 8951000132

Model	GHN600
Capacity	600 kg
min. height	1180 mm
max. height	2000 mm
Weight	38 kg
A / B	560 / 590 mm
C	75 mm
D	1180 mm
E	2000 mm
F	820 mm
G	460 mm
H	20 mm
Oil volume	910 ml

**Capacity 600 kg**

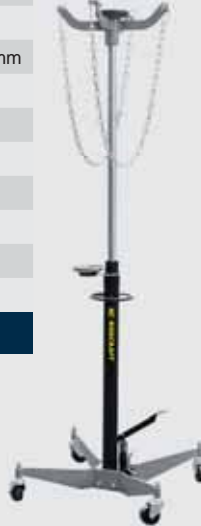


- Chromed cylinder in an oil bath
- Easy to position with round horizontal handle
- Large foot pedal for lifting without locking position
- Small foot pedal for lowering
- Automatic descent stop-pedal
- Safety valve against overloading
- Reversible crown to place drain pans
- Incl. 1,2 m length chain to fix load

**Model** Part#  
**GHN1000** 8951000133

Model	GHN1000
Capacity	1000 kg
min. height	1180 mm
max. height	2010 mm
Weight	50 kg
A / B	560 / 590 mm
C	75 mm
D	1180 mm
E	2010 mm
F	830 mm
G	455.5 mm
H	20 mm
Oil volume	1320 ml

**Capacity 1000 kg**

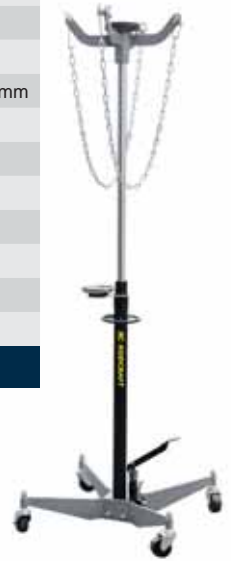

- Chromed cylinder in an oil bath
- Easy to position with round horizontal handle
- Large foot pedal for lifting without locking position
- Small foot pedal for lowering
- Automatic descent stop-pedal
- Safety valve against overloading
- Reversible crown to place drain pans
- Incl. 1,2 m length chain to fix load



# Transmission Jacks 300-1000 Kg capacity

Anti-rust : chromed cylinder in an oil bath

Convenient & complete:  
Provided with a 1.2m length chain, a reversible claw with rubber pad and a magnetic tray

Round horizontal handle

High stability:  
Large & low clearance base


Hands-free operation :  
Large foot pedal for lifting without locking position and a small foot pedal for lowering



**GHN300  
600-1000**

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

# DRAIN PANS

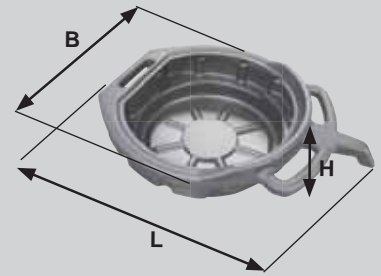

**Model P2** Part# 8951000057

Model	P2
Capacity	8 l
Weight	0,7 kg
Dimensions:	
L	515 mm
B	390 mm
H	145 mm

**Capacity: max. 8 L**



- 3 handles for carrying
- Anti-splash rim
- Made of oil and petrol resistant polyethylene (HDPE)



**Model P46** Part# 8951000058

Model	P46
Capacity	16 l
Weight	0,95 kg
Dimensions:	
L	570 mm
B	450 mm
H	175 mm

**Capacity: max. 16 L**



- 3 handles for carrying
- Anti-splash rim
- Made of oil and petrol resistant polyethylene (HDPE)
- Compatible with GHN model's



**Model P4** Part# 8951081032

Model	P4
Capacity	17 l
Weight	2 kg
Dimensions:	
L	675 mm
B	380 mm
H	150 mm

**Capacity: max. 17 L**



- 3 handles for carrying
- Closed version
- Made of oil and petrol resistant polyethylene (HDPE)

**Model P50** Part# 8951000090



Model	P50
Capacity	43 l
Weight	4.1
Dimensions:	
L	912 mm
B	495 mm
H	179 mm

**Capacity max: 43 L**



- 3 handles for carrying
- Closed model
- Made of oil and petrol resistant polyethylene
- 2 wheels for easy transportation

# Quality tools for professionals

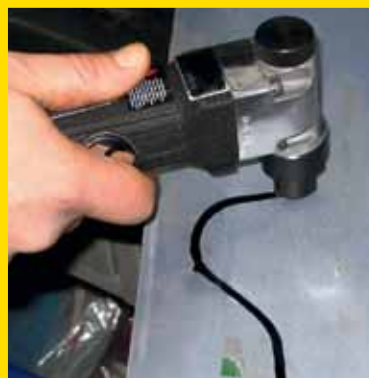

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20





HRS04



## 17| Car Body

- | Hydraulic ram sets
- | Pneumatic hydraulic pump
- | Hydraulic cylinders
- | Mobile hydraulic straightener
- | Pull clamps
- | Accessories

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

**17**

18

19

20

**Model** Part#  
**HRS04** 8951000124

**Model** Part#  
**HRS10** 8951000125

Model	HRS04
Stroke cylinder	120 mm
ø Cylinder	40 mm
ø Cylinder	44 mm
ø Piston	25 mm
min. Length	268 mm
max. Length	388 mm
Oil volume Pump	0.4 l
Oil volume Cylinder	0,4 l
max. Pressure	700 bar
<b>4 ton capacity</b>	

Model	HRS10
Stroke cylinder	130 mm
ø Cylinder	56,5 mm
ø Cylinder	63 mm
ø Piston	40 mm
min. Length	320 mm
max. Length	450 mm
Oil volume Pump	0.5 l
Oil volume Cylinder	0,5 l
max. Pressure	700 bar
<b>10 ton capacity</b>	

- Application: pushing - widening - clamping
- Easy assembly because of unthreaded connections
- 17 piece set in a plastic case for easy storage
- Each piece with its own moulded compartment to keep the set complete
- NO LOOSE STYROFOAM MOULDS
- Includes full set of accessories





- Application: pushing - widening - clamping
- Easy assembly because of unthreaded connections
- 17 piece set in a plastic case for easy storage
- Each piece with its own moulded compartment to keep the set complete
- NO LOOSE STYROFOAM MOULDS
- Includes full set of accessories


**HRS04 and HRS10 set**




**Accessories for HRS04/HRS10**

-  **Pump**  
for Part#  
**HRS04** 8950321713  
**HRS10** 8950321748
-  **Hose 1.500 mm**  
for Part#  
**HRS04** 8951011979  
**HRS10**
-  **Push ram 10 t**  
for Part#  
**HRS04** 8950321714  
**HRS10** 8950321749
-  **Spreader 0,5 t**  
for Part#  
**HRS04** 8950321715  
**HRS10**

Model	Part#
<b>Extension kit HRS04</b>	8950390020
<b>Extension kit HRS10</b>	8950390035
	400 mm
	350 mm
	250 mm
	100 mm

-  **Tool box**  
for Part#  
**HRS04** 8950390006  
**HRS10** 8950390022

Model	Part#
<b>Connector kit HRS04</b>	8950390021
<b>Connector kit HRS10</b>	8950390036
	Protection piece for piston
	Plate
	Prisma piece
	Wedge piece, sharp
	Push for piston
	Push for cylinder
	Rubber



**Model**    **Part#**  
**HRS20**    *8951000126*


Model	HRS20
Stroke cylinder	130 mm
ø Cylinder	90 mm
ø Piston	60 mm
min. Length	280 mm
max. Length	410 mm
Oil volume Pump	0.9 l
Oil volume Cylinder	0,9 l
max. Pressure	700 bar


## 20 ton capacity

- Application: pushing - clamping
- All accessories in steel with threaded connections
- 2-step hand pump for 700 bar working pressure
- Stored in 2 durable metal boxes
- Including full set of accessories
- 130 mm stroke of hydraulic cylinder
- Hose length 1500 mm (pump/cylinder)











### Accessories for HRS20

 **Pump, hydraulic 2-step**  
 Part#  
*8950321755*

 **Hose**  
 Part#  
*8951011979*

**Model**    **Part#**  
**Connector kit HRS20**    *8950390050*

-  Lock pin
-  Connector male thread
-  Connector female thread
-  Plunger base
-  Extension
-  Toe lift
-  Wedge head
-  Saddle

**Model**    **Part#**  
**Extension kit HRS20**    *8950390049*

-  700 mm
-  500 mm
-  250 mm
-  125 mm

### Accessories for HRS04/HRS10/HRS20


**Model**    **Part#**  
**PHP10**    *8951000136*



Pneumatic-hydraulic Pump.  
 Adaptable with cylinders of HRS04 / HRS10 / HRS20  
 Description see page 132

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20


# PNEUMATIC-HYDRAULIC PUMP HYDRAULIC CYLINDER / PULL CLAMPS

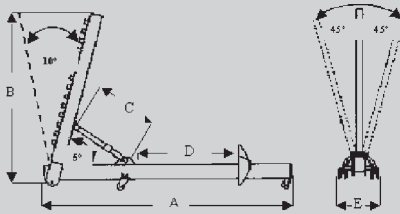

**Model**    **Part#**  
**RGS100**   **8951089054**


**Model**    **Part#**  
**PHP10**    **8951000136**

Model	RGS100
Dimensions:	
A	2900 mm
B	1600 mm
C	600 - 700 mm
D	0 - 1900 mm
E	720 mm
Gradient	2 x 45°
Weight	230 kg
<b>10 ton capacity</b>	



Pneumatic-hydraulic Pump. Convenient and easy to handle, operation by hand or foot. 1-step silenced pump with high performance. Ideal in combination with rams like HRS04/ HRS 10/HPP10 and dozer RGS 100. Maximum hydraulic pressure 700 bar. Oil capacity 0.7 l, hydraulic high pressure hose length 1,5 m

**Model**    **Part#**  
**HRZ**      **8951000137**

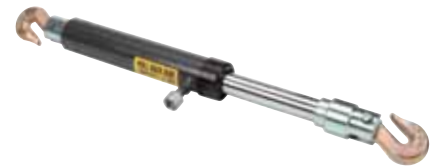


Pulling force 5 t. Stroke 156 mm. Thread on cylinder 1/4". Length maximum 665 mm (including hook)

**Model**    **Part#**  
**HRD10F**   **8951000138**



Pushing force 10 t . Stroke 10 mm . Thread on cylinder 1/4". Adaptable with pumps PHP10

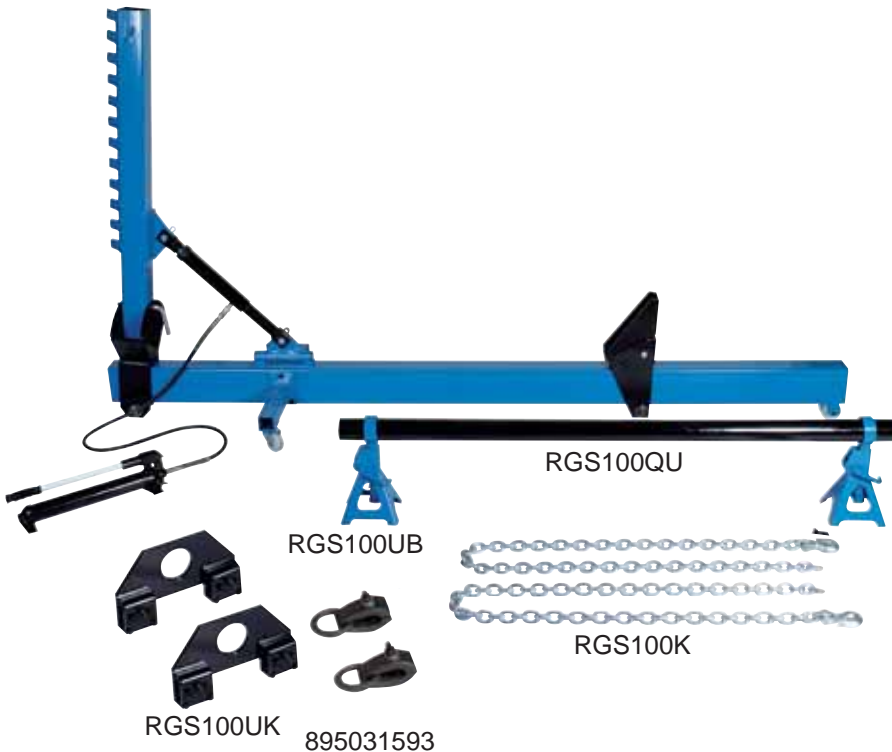

- Easy to move with oil and acid resistant plastic wheels
- Strong 8" 10 t hydraulic ram
- Pull arm can be tilted sideways 45°
- Precise control of pump serves smaller or even delicate straightening applications
- PHP10 is an ideal supplement for this tool that will save time and reduce the manual effort

**INCLUDES:**

- 1x manual pump with high pressure hose (length 1.50 m)
- 2x chains, length of 1.50 m (model RGS100K-8951011083) with hook (model RGS100H-8951011082)
- 2x jack stands, adjustable in height (model RGS100UB - 8951011080)
- 2x body clamps, long type - hole diameter 75 mm (model RGS100UK - 8951011084)
- 1x supporting pipe length 1,80 m, diameter 74 mm (model RGS100QU - 8951011081)
- 2x universal pull clamps with ring (895031593)
- 1x counter support, complete (shark's fin)

**Model**    **Part#**  
**HRD10K**   **8951000139**



Pushing force 10 t. Hydraulic stroke 50 mm. Length minimum 130 mm. Thread on cylinder 1/4". Adaptable with pumps PHP10

**Model** Part#  
**101** 8951011064

Model	101
Total length	225 mm
Total width	85 mm
Total height	70 mm
Height of grip	22 mm
Width of grip	40 mm
Bolt/nut	M16x70
Weight	1,8 kg

One pulling direction



**Model** Part#  
**102NN** 8951011068

Model	102NN
Total length	240 mm
Total width	155 mm
Total height	40 mm
Height of grip	15 mm
Width of grip	35 mm
Bolt/nut	M14x110
Weight	2,1 kg

Two pulling directions



**Model** Part#  
**601N** 8951011073

Model	601N
Total length	180 mm
Total width	120 mm
Total height	150 mm
Height of grip	15 mm
Width of grip	120 mm
Bolt/nut	M14x68
Weight	2,7 kg

Two pulling directions



**Model** Part#.  
**101N** 8951011066

Model	101N
Total length	220 mm
Total width	120 mm
Total height	45 mm
Height of grip	25 mm
Width of grip	43 mm
Bolt/nut	M16x70
Weight	1,8 kg

Two pulling directions



**Model** Part#.  
**301** 8951011069

Model	301
Total length	260 mm
Total width	65 mm
Total height	80 mm
Height of grip	25 mm
Width of grip	30 mm
Bolt/nut	M14x68
Weight	1,6 kg

Quick chain hook



**Model** Part#  
**901** 8951011071

Model	901
Total length	200 mm
Total width	65 mm
Total height	65 mm
Height of grip	-
Width of grip	-
Bolt/nut	-
Weight	1,3 kg

Chain shortener



**Model** Part#.  
**102** 8951011065

Model	102
Total length	240 mm
Total width	125 mm
Total height	45 mm
Height of grip	15 mm
Width of grip	35 mm
Bolt/nut	M14x120
Weight	2,0 kg

One pulling direction



**Model** Part#.  
**402** 8951011070

Model	402
Total length	180 mm
Total width	180 mm
Total height	45 mm
Height of grip	15 mm
Width of grip	45 mm
Bolt/nut	-
Weight	2,4 kg

One pulling direction



**Model** Part#  
**101/101N** 8951011076  
**601/601N** 8951011074  
**102** 8951011077  
**102N/102NN** 8951011078

Screw Kits



**Model** Part#.  
**102N** 8951011067

Model	102N
Total length	230 mm
Total width	90 mm
Total height	35 mm
Height of grip	15 mm
Width of grip	35 mm
Bolt/nut	M14x110
Weight	2,0 kg


One pulling direction




**Model** Part#.  
**601** 8951011072

Model	601
Total length	180 mm
Total width	120 mm
Total height	70 mm
Height of grip	15 mm
Width of grip	120 mm
Bolt/nut	M14x68
Weight	2,3 kg

One pulling direction



01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20

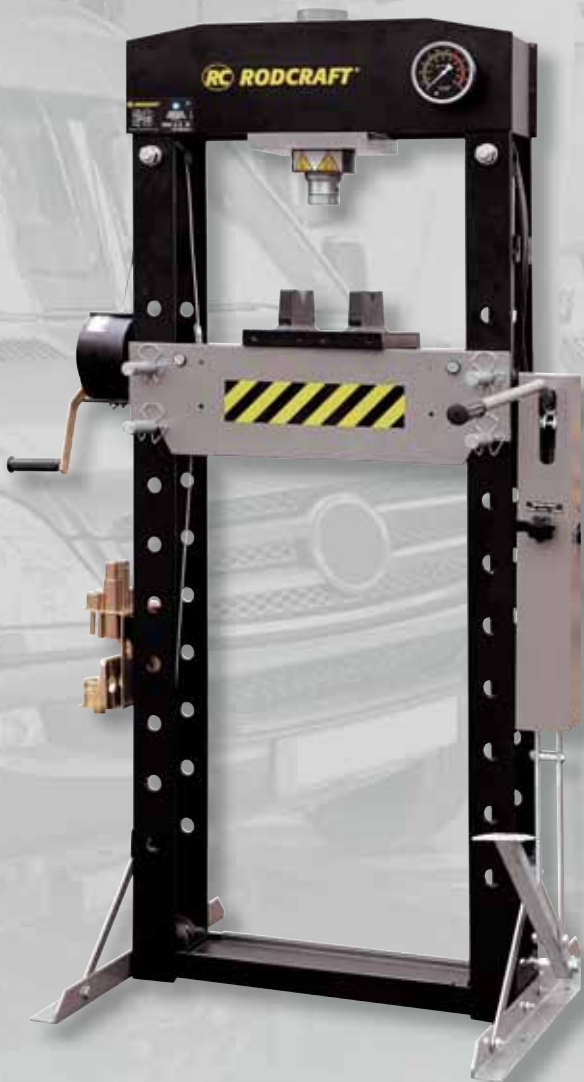

**WP30P**

## **18| Workshop presses**

- | Workshop presses
- | Accessories

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16


17

**18**

19

20

# WORKSHOP PRESSES



**Model**    **Part#**  
**WP15**    895100064



**Model**    **Part#**  
**WP20S**    895100065



**Model**    **Part#**  
**WP30P**    895100071



Model	WP15
Capacity	15 t
Max. Width A	700 mm
max. Length B	540 mm
max. Height C	882 mm
Width inside frame E	500 mm
Distance inside frame F	120 mm
Distance over table F 1 min.	157 mm
Distance over table F 2 max.	457 mm
Hydraulic stroke R	160 mm
Oil volume	0.6 l
Weight	75.5 kg


**2 stage hydraulic**

Model	WP20S
Capacity	20 t
Max. Width A	740 mm
Max. Length B	700 mm
Max. Height C	1772 mm
Width inside frame E	510 mm
Distance inside frame F	132 mm
Distance over table F 1 min.	185 mm
Distance over table F 2 max.	1175 mm
Hydraulic stroke R	186 mm
Oil volume	0.95 l
Weight	105 kg

**2 stage hydraulic**

Model	WP30P
Capacity	30 t
max. Width A	795 mm
max. Length B	700 mm
max. Height C	1772 mm
Width inside frame E	535 mm
Distance inside frame F	140 mm
Distance over table F 1 min.	151 mm
Distance over table F 2 max.	1031 mm
Hydraulic stroke R	160 mm
Oil volume	1.1 l
Weight	167 kg

**Foot pump**



- Professional workshop press with welded frame
- Manual hydraulic pump with ergonomic handle
- 2-speed pump that can be manually switched
- Easy-to-read large gauge
- For pressing on smaller diameters (like bushings and bearings) we offer a press bolt set from our accessory range that fits this press and contains various press bolts, a quick chuck and a punch plate



- Workshop press for applications that can be done while standing
- Especially useful for larger work pieces
- Robust, welded frame
- Automatic 2-speed hydraulic pump with sturdy lever in ergonomic position for powerful pressing
- For pressing on smaller diameters (like bushings and bearings) we offer a press bolt set from our accessory range that fits this press and contains various press bolts, a quick chuck and a punch plate



- Workshop press with extra wide robust, welded frame
- For one person operation
- Cylinder can be shifted sideways for versatile applications
- 2-speed pump that can be switched manually for fast approach and powerful pressing
- Includes a set of press bolts with quick change chuck (see DS8)
- Adjust the press table easily with the help of the suspending cables and the central winch



Model WP50P Part# 8951000072




Model	WP50P
Capacity	50 t
max. Width A	1030 mm
max. Length B	800 mm
max. Height C	1830 mm
Width inside frame E	730 mm
Distance inside frame F	207 mm
Distance over table F 1 min.	68 mm
Distance over table F 2 max.	1048 mm
Hydraulic stroke R	200 mm
Oil volume	2.5 l
Weight	298 kg

**Foot pump**



- Workshop press with extra wide robust, welded frame
- For one person operation
- Cylinder can be shifted sideways for versatile applications
- 2-speed pump that can be switched manually for fast approach and powerful pressing
- Includes a set of press bolts with quick change chuck (see DS8)
- Adjust the press table easily with the help of the suspending cables and the central winch

# Comfortable 30t or 50t presses

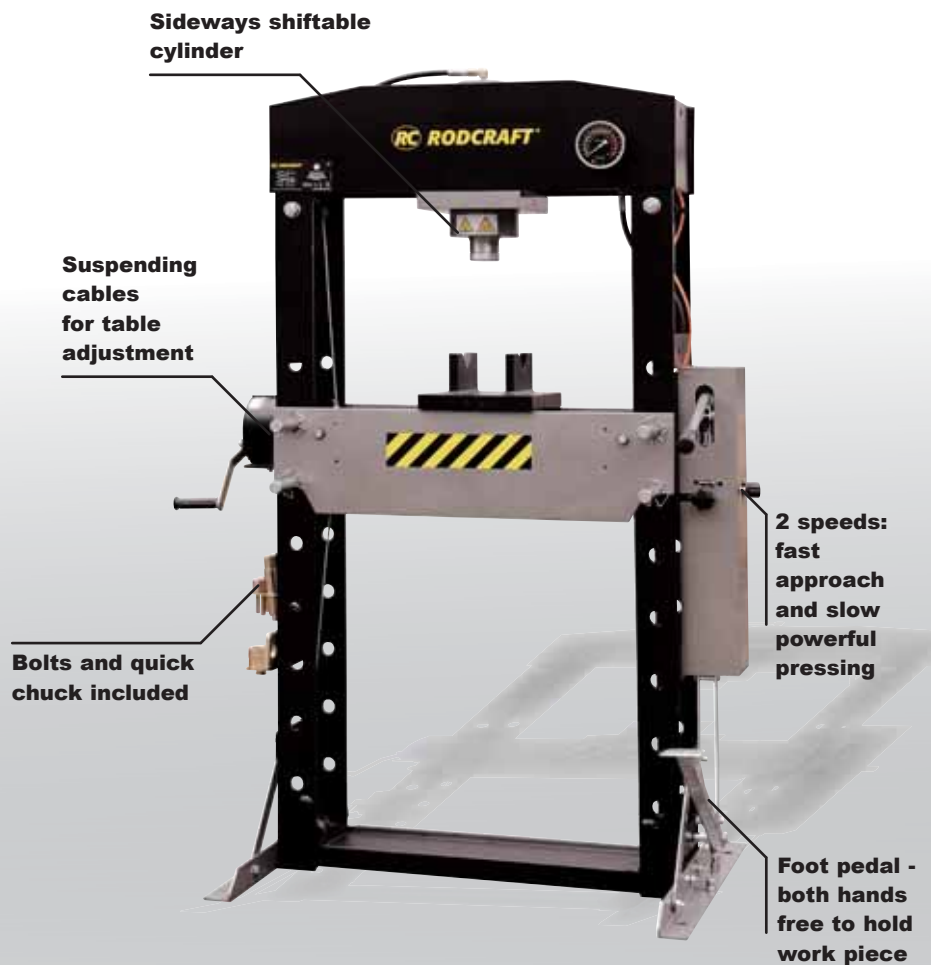

**Accessories**

Model DS8 Part# 8955000050



- Press bolt set with punch plate and quick chuck
- Fits the pistons of all presses shown here
- The quick chuck allows the fast exchange of press bolts to adapt the diameter of the press bolt to various applications
- Already included with models WP30P and WP50P

Model Punch plate Part# 8955000049



Model Quick change Part# 8955000039



Model	Part#
Punch 10 mm	8955000048
Punch 12 mm	8955000047
Punch 16 mm	8955000042
Punch 18 mm	8955000041
Punch 20 mm	8955000043
Punch 22 mm	8955000044
Punch 25 mm	8955000045
Punch 30 mm	8955000046

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



**Model** Part#  
**WP75P** 8951000170

**RODCRAFT**  
Premium

Model	WP75P
Capacity	75 t
max. Width A	1140 mm
max. Length B	800 mm
max. Height C	1840 mm
Width inside frame E	800 mm
Distance inside frame F	245 mm
Distance over table F 1 min.	170 mm
Distance over table F 2 max.	884 mm
Hydraulic stroke R	250 mm
Oil volume	4.5 l
Weight	498 kg

2 stage hydraulic



- Workshop press with extra wide robust, welded frame
- For one person operation
- Cylinder can be shifted sideways for versatile applications
- 2-speed pump that can be switched manually for fast approach and powerful pressing
- Includes a set of press bolts with quick change chuck (see DS8)
- Adjust the press table easily with the help of the suspending cables and the central winch

**Model** Part#  
**WP100P** 8951000171

**RODCRAFT**  
Premium

Model	WP100P
Capacity	100 t
max. Width A	1200 mm
max. Length B	990 mm
max. Height C	1830 mm
Width inside frame E	787 mm
Distance inside frame F	300 mm
Distance over table F 1 min.	114 mm
Distance over table F 2 max.	814 mm
Hydraulic stroke R	300 mm
Oil volume	5.6 l
Weight	766 kg

2 stage hydraulic



- Hydro-pneumatic pump
- Powered lift of the piston
- Robust welded frame
- For one person operation
- Movable cylinder with winch
- 2-speed pump that can be switched manually - for fast approach and powerful pressing
- Includes a set of press bolts with quick change chuck (see DS8)
- Adjust the press table easily with the help of the suspending cables and the central winch

# Durable and easy to use

**Convenient**

Winch to manipulate the cylinder and the table

**Versatile**

Delivered with a quick chuck and 8 punches

**Precision**

**Fast & Easy Work**

Pneumatic pump driven by foot



**WP100P**

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



RWH703

## 19| Wheel Dolly

| Wheel Dolly

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

**19**

20

Model **RG600** Part# **8951089045**

### Max. width 300 mm



- Easy positioning of cars
- Moving in all directions
- Simple to use with foot pedal
- The wheel is lowered when turning the valve
- Knob - robust hydraulic system instead of high maintenance mechanical mechanism (no regreasing of gears etc.)
- For tyres up to a width of 300 mm and a diameter of 650 mm



Model **RHW1** Part# **8951089091**

### Adjustable 290-620 mm



- Assembly aid for various types of wheels
- Adjustable arms for various wheel sizes (width 29 – 62 cm)
- Equipped with rollers for easy positioning of wheels onto the vehicle's stud bolts or holes in the brake disk
- With stop rollers on the rear side that avoid pushing the wheel onto the frame
- Ergonomic handle with rounded and soft grip
- Handle length adjustable (3 positions)
- Max. capacity 250 kg



Model **RHW703** Part# **8951000168**

### Adjustable 545-1280 mm



- Application: quick and easy disassembly and assembly of truck wheels and wheel sets, with or without brake drum
- Easy loading and transport to or from the lathe, tyre mounting machine or axle
- 2 swivel front wheels and 2 fixed rear wheels facilitate moving and precise positioning of the lift in order to avoid damage to axle bolts (no more tapping for repair of bolts needed)
- Saves time and contributes to safety and worker's health (spine)
- Practical foot pedal for lowering the lifted wheels (dead man auto-stop valve)
- Sturdy chassis made of square steel bars with max. capacity 700 kg
- Retaining arms can be adjusted sideways for small wheels as well as wheel sets
- Each loaded wheel rests stable and can still be turned individually when loaded because of 2 broad chromed rollers on each retaining arm
- Oil and acid resistant heavy duty wheels with large diameter
- Partly foldable and legs can be taken off for storage an easier transport in service cars
- The asymmetrically installed hydraulic unit on one side offers enough space to get access to the wheel hub and bolts even for 1" impact wrenches etc.
- Hydraulic construction for less maintenance in contrast to chain/roller construction



Model Part#  
**RHW120 8951000169**

Adjustable 1000-2200 mm



- Application: quick and easy disassembly and assembly of truck wheels and wheel sets, with or without brake drum
- Easy loading and transport to or from the lathe, tyre mounting machine or axle
- 2 swivel front wheels and 4 fixed rear wheels facilitate moving



# Strong and easy to use

Single pump to open and close the arms

3D-move adjustable arm

Large roller with auto-adjustment to the wheel

Tyre dimension from 1000 to 2200mm

**RHW120**

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20



**RSF01**



## 20| Various

- | Torque Wrench
- | Creeper
- | Brake fluid tester
- | Start-booster
- | Work light

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

**20**

Model Part#  
**DMS030** 895100091

Model	DMS030
Square Drive	1/4"
Capacity	5 – 25 N.m
Graduation	0,1 N.m
Length	245 mm
Weight	1.28 kg
<b>1/4" - 5 – 25 N.m</b>	



- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 0.1 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches

Model Part#  
**DMS060** 895100092

Model	DMS060
Square Drive	3/8"
Capacity	20 – 100 N.m
Graduation	0,5 N.m
Length	410 mm
Weight	1.5 kg
<b>3/8" - 20 – 100 N.m</b>	



- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 0.5 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches

Model Part#  
**DMS200** 895100093

Model	DMS200
Square Drive	1/2"
Capacity	40 – 200 N.m
Graduation	1 N.m
Length	520 mm
Weight	2.02 kg
<b>1/2" - 40 – 200 N.m</b>	



- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 1 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches



Model Part#  
**DMS400** 895100094

Model Part#  
**DMS1000** 895100095

Model	DMS400
Square Drive	3/4"
Capacity	150 – 750 N.m
Graduation	5 N.m
Length	1060 mm
Weight	5.84 kg
<b>3/4" - 150 – 750 N.m</b>	

Model	DMS1000
Square Drive	1"
Capacity	200 – 1000 N.m
Graduation	5 N.m
Length	1255 mm
Weight	6.84 kg
<b>1" - 200 – 1000 N.m</b>	



- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 5 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches

- Scale in Nm
- Torque adjustment with manual locking in front of the handle
- Fine scale graduation: 5 Nm
- Sensitive & sound signals when reaches the torque
- Provided with ISO 6789 calibration certificate
- Provided in a protective blow molded case
- Numbered wrenches

**DMS030 - 1/4"**



**DMS060 - 3/8"**



**DMS200 - 1/2"**



**DMS400 - 3/4"**



**DMS1000 - 1"**



- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20

Model **RSF01** Part# *8951089021*

Model **RSF02** Part# *8951089020*

Model	RSF01
Sitting height	480 mm
min. height	150 mm
Length	1.250 mm
Width	450 mm
Weight	14 kg
<b>Ergonomic sitting height</b>	

Model	RSF02
Min. height	115 mm
Length	1.005 mm
Width	480 mm
Weight	4,8 kg
<b>Weight 4,8 kg only</b>	



- Creeper - chair in one, for various working heights
- Ergonomic design especially for tiring work
- Folding mechanism with safety lock against unintended folding
- Easy and stable to move on seven large
- Wheels diameter 63 mm oil and acid resistant
- Comfortably upholstered and covered with easy to clean surfaces
- Head rest adjustable in 3 positions
- Storage area for tools, sockets, light (upholstery at feet can be folded up)
- Capacity 90 kg



- Solid creeper construction made of plastic
- Extra low area at arms for more freedom
- Upholstered head rest
- Two easy to reach storage areas for parts and tools
- 6 large oil resistant wheels for noise and vibration reduced moving
- Capacity 90 kg



Model	Part#
<b>RC250</b>	8956001300
<b>RC500</b>	8956001301

Model	RC250	RC500
Capacity	250 F	500 F
Starting current (amps peak)	8000 A.p.	9000 A.p.
Starting current (amps continuous)	1300 A	1800 A
Weight	19.4 kg	21.4 kg
Polarity Inversion Alarm	yes	yes
Test Unit	yes	yes
Charge on Sector	yes	yes
Charge on car plug	no	no
Charge on Engine	yes	yes
Cable cross section	50 mm <sup>2</sup>	50 mm <sup>2</sup>
Cable length	1.1 m	1.1 m

### Ultracapacitor technology

- Ultracapacitor
- Buzzer to prevent polarity inversion and fuse to protect booster and car
- 30 seconds on running engine
- 6 hour with DC adaptor included
- Large copper clamps
- Lightweight and comfortable large handle
- Batteryless with 1 Million cycles life time : 5 years warranty
- Easy reading capacitor charge information with LED light
- Cable reel plus clamp holder for better storage - 63 in. / 110 cm length cable for better access
- All type of engines powered by 12V

Model	Part#
<b>BFT02</b>	8951089032

Model	BFT02
Length	130 mm
Width	20 mm
Weight	20 g

### Brake Fluid Tester



- Easy to operation: 3 modes according to the water % in the brake fluid.
- Supplied with 1 battery

# Capacitor technology

**500F ultracapacitor 9000A power for any 12V motor**



**1 Million cycles life time  
5-year warranty**

**RC500**

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20

Model	Part#	Page	LwA (dB(A))	k (m/s <sup>2</sup> )	Model	Part#	Page	LwA (dB(A))	k (m/s <sup>2</sup> )	Model	Part#	Page	LwA (dB(A))	k (m/s <sup>2</sup> )
<b>7905</b>	8951000016	74			<b>P46</b>	8951000058	126			<b>RC3700</b>	8951078074	21	90.2	1.63
<b>7910</b>	8951089014	74			<b>P50</b>	8951000090	126			<b>RC4100</b>	8951073000	30	97.7	1.7
<b>AGS185</b>	8951089055	83			<b>PHP10</b>	8951000136	132			<b>RC4105</b>	8951073001	30	82.3	1.7
<b>ATJ30-2</b>	8951000269	112			<b>RC2003</b>	8951000195	10	103	1	<b>RC4107</b>	8951073011	30	92.3	1.7
<b>ATJ50-3</b>	8951000270	112			<b>RC2077</b>	8951000117	10	98.6	0.9	<b>RC4500</b>	8951073021	31	104	1.7
<b>ATJ80-2</b>	8951000272	112			<b>RC2077K</b>	8951000145	10	98.6	0.9	<b>RC4550</b>	8951073031	32	103	1.7
<b>BC2-2L</b>	8951000178	110			<b>RC2101</b>	8951000196	10	103	1	<b>RC4607</b>	8951073090	31	92.3	1.7
<b>BC2-2S</b>	8951000177	110			<b>RC2177</b>	8951000043	11	101	2.5	<b>RC4650</b>	8951073050	32	101	1.7
<b>BC2-3L</b>	8951000179	110			<b>RC2202</b>	8951000123	11	106	4.4	<b>RC4700</b>	8951073002	26	99.6	
<b>BFT02</b>	8951089032	149			<b>RC2205</b>	8951000085	11	98.4	1.2	<b>RC4760</b>	8951073012	26	99.7	
<b>DMS030</b>	8951000091	146			<b>RC2235</b>	8951000286	12	108	4.8	<b>RC4784</b>	8951073023	26	91.3	
<b>DMS060</b>	8951000092	146			<b>RC2257</b>	8951000037	12	104	2.3	<b>RC500</b>	8956001301	149		
<b>DMS200</b>	8951000093	146			<b>RC2267</b>	8951000044	11	104	2	<b>RC5100</b>	8951071022	36	94.8	1.9
<b>DMS400</b>	8951000094	147			<b>RC2277</b>	8951000025	12	104	2.6	<b>RC5120</b>	8951171013	36	94.8	1.9
<b>DMS1000</b>	8951000095	147			<b>RC2315</b>	8951077130	14	102	1.5	<b>RC5150</b>	8951171023	36	94.8	1.9
<b>GHN300</b>	8951000131	124			<b>RC2377</b>	8951000045	14	107.8	6.7	<b>RC5160</b>	8951171033	36	94.8	1.9
<b>GHN600</b>	8951000132	124			<b>RC2387</b>	8951000074	14	107.8	6.7	<b>RC5176</b>	8951171043	38	97.3	0.9
<b>GHN1000</b>	8951000133	124			<b>RC2405</b>	8951000075	15	107.8	6.7	<b>RC5185</b>	8951000152	37	102	1.2
<b>HRD10F</b>	8951000138	132			<b>RC2425</b>	8951077190	15	109	2	<b>RC5195</b>	8951000154	37	102	1.5
<b>HRD10K</b>	8951000139	132			<b>RC2426</b>	8951077032	15	107		<b>RC5305</b>	8951071065	38	98.8	1.2
<b>HRS04</b>	8951000124	130			<b>RC2437-XI</b>	8951000068	15	111.8	2.7	<b>RC5310</b>	8951171053	39	98.8	1
<b>HRS10</b>	8951000125	130			<b>RC2444</b>	8951077210	16	115	1.4	<b>RC5400</b>	8951071076	39	99	1.9
<b>HRS20</b>	8951000126	131			<b>RC2447-XI</b>	8951000069	15	111.8	2.7	<b>RC5610</b>	8951076001	44	89.5	2.2
<b>HRZ</b>	8951000137	132			<b>RC2457Xi</b>	8951000135	16	117	3.8	<b>RC5615</b>	8951076002	44	88.1	1.6
<b>LHH22</b>	8951084201	111			<b>RC2466</b>	8951000047	16	111	1.6	<b>RC5620</b>	8951076003	44	97.6	1.9
<b>LHH35</b>	8951084350	111			<b>RC2476</b>	8951000048	16	111	1.9	<b>RC5625</b>	8951076004	45	94	3
<b>MGN2</b>	8951000009	114			<b>RC2477Xi</b>	8951000046	16	117	3.8	<b>RC6050</b>	8951079001	50	90.9	2.09
<b>MGN3</b>	8951000010	114			<b>RC250</b>	8956001300	149			<b>RC6067</b>	8951079011	50	90.9	1.36
<b>MGN5</b>	8951000011	114			<b>RC2530</b>	8951077260	17	108	1.9	<b>RC6100</b>	8951076008	49	103	2.29
<b>MGN8</b>	8951000012	114			<b>RC3000</b>	8951078012	18	89.6	1.9	<b>RC6210</b>	8951076009	48	98.2	1.8
<b>MGN12</b>	8951000013	114			<b>RC3001</b>	8951078022	18	84	1.53	<b>RC6212</b>	8951076020	48	98.2	1.8
<b>MGN12F</b>	8951000127	114-115			<b>RC3005</b>	8951078042	19	89.6	2.02	<b>RC6220</b>	8951076010	48	76.2	0.7
<b>MGN12L</b>	8951000128	114-115			<b>RC3010</b>	8951078013	19	89.6	2.07	<b>RC6301</b>	8951076011	49	81.6	0.88
<b>MGN20</b>	8951000014	114			<b>RC3060</b>	8951078062	18	80.9	1.81	<b>RC6453</b>	8951076013	49	99.8	0.72
<b>MGN20F</b>	8951000129	114-115			<b>RC3100</b>	8951078004	20	89.7	2.39	<b>RC6605RE</b>	8951074005	82	90.8	1.02
<b>MGN30</b>	8951000015	114			<b>RC3200</b>	8951078023	20	89.7	1.46	<b>RC6610</b>	8951074000	82	97.9	1.02
<b>MGN50L</b>	8951000130	114-115			<b>RC3260</b>	8951078033	19	80.9	2.15	<b>RC6700</b>	8951074001	54	97.5	0.8
<b>P2</b>	8951000057	126			<b>RC3600</b>	8951078034	20	85.6	2.68	<b>RC6710</b>	8951074002	54	75.1	0.9
<b>P4</b>	8951081032	126			<b>RC3607</b>	8951078114	21	85.6	1.85	<b>RC6715</b>	8951074003	54	88.3	0.7

Model	Part#	Page	LwA (dB(A))	k (m/s <sup>2</sup> )	Model	Part#	Page	LwA (dB(A))	k (m/s <sup>2</sup> )	Model	Part#	Page	LwA (dB(A))	k (m/s <sup>2</sup> )
RC6718XI	8951074008	55	87.2	0.7	RC7702V6	8951000021	72	90.5	1.5	RH215	8951082026	107		
RC6720	8951074004	55	77.2	0.8	RC7705V6	8951000020	72	97.1	1.2	RH251	8951082024	107		
RC6900	8951075000	50	95.5	1.49	RC7705V6-2H	8951000081	72		2.3	RH290	8951082031	106		
RC7009	8951000274	58	96.7	0.75	RC7710V6	8951000070	72	90.1	2.3	RH301	8951082032	108		
RC7028	8951000275	60	96.2	0.66	RC7710V6-2H	8951000082	72		2.3	RH310	8951082100	109		
RC7038	8951000328	62	97	0.7	RC8000	8951070000	95			RH315	8951000063	108		
RC7048	8951000276	60	96.7	0.79	RC8010	8951070030	94			RH501	8951082050	108		
RC7051	8951000165	58	82		RC8011	8951070040	94			RHW1	8951089091	142		
RC7058	8951000278	58	103.7	0.61	RC8035	8951070050	95			RHW120	8951000169	143		
RC7068	8951000329	62	107.1	0.8	RC8102-14	8951070002	86			RHW703	8951000168	142		
RC7072RE	8951075270	66	85.8		RC8103-08	8951070012	86			RSF01	8951089021	148		
RC7077RE	8951075310	66	85		RC8106-13	8951070011	86			RSF02	8951089020	148		
RC7075RE	8951075290	66	85.1		RC8107-14	8951070021	87			STS70K	8951089056	83		
RC7091	8951176010	64			RC8112	8951070003	91			STS71K	8951011087	83		
RC7120	8951072001	67	102	0.8	RC8113	8951070023	91			UBZ-2	8951000027	117		
RC7128	8951000277	60	95.8	0.82	RC8115	8951070034	95			UBZ-3	8951000028	117		
RC7130	8951072004	78	98.9	1.2	RC8116	8951070004	91			UBZ-6	8951000029	117		
RC7150	8951072021	67	82		RC8118	8951011018	96			USB1.5	8951000096	116		
RC7155	8951072041	69	90.5	0.7	RC8120	8951070014	92			USB1.5H	8951000097	116		
RC7156	8951072051	69	94.2	0.7	RC8132	8951000059	96			USB3	8951000098	116		
RC7160	8951075021	68	96.2	0.95	RC8141	8951070090	96			USB5	8951000099	116		
RC7166	8951075051	68	96.6	1.06	RC8150	8951012204	100			USB8	8951000101	116		
RC7170	8951000144	69	97	1.3	RC8150F	8951012205	100			USB8H	8951000102	116		
RC7171	8951000210	68	95	1.9	RC8150K	8951012206	100			USB12G	8951000103	116		
RC7172	8951000211	68	95	3.5	RC8240	8955000026	92			USB12HG	8951000104	116		
RC7173	8951000212	68	95	2.4	RC8240S	8955000009	93			USB16H	8951000106	116		
RC7190	8951075101	68	101	0.84	RC8241	8955000010	93			USBN5	8951000100	116		
RC7200V	8951072111	70	97.2	1.3	RC8241S	8955000011	93				8951000166	120		
RC7500	8951072101	73	91.1	2.6	RC8500	8951011022	94			WK102K	8951080101	120		
RC7661V	8951072231	70	98	1.5	RC8502	8951011024	94			WP15	8951000064	136		
RC7681K	8951000019	67	85.6	1.2	RC8502N	8951012217	94			WP20S	8951000065	136		
RC7682	8951000005	70	90.6	3	RF02G	8951011019	90			WP30P	8951000071	136		
RC7682K	8951000018	70	90.6	3	RFP03DG	8951011020	90			WP50P	8951000072	137		
RC7683	8951000004	78	89.5	1.2	RFP04G	8951012306	90			WP75P	8951000170	138		
RC7683K	8951000017	78	89.5	1.2	RG600	8951089045	142			WP100P	8951000171	138		
RC7684	8951000115	62	91.1	1.58	RGS100	8951089054	132							
RC7684RE	8951000118	62	91.1	1.58	RH135	8951082025	106							
RC7686RE	8951000119	62	91.1	1.58	RH151	8951000051	107							
RC7691V	8951072212	72	98.6	1.5	RH201	8951000003	106							













[www.linkedin.com/company/rodcraft](http://www.linkedin.com/company/rodcraft)

Visit [www.rodcraft.com](http://www.rodcraft.com) for more product information  
or contact your local distributor:

